

YOUR SAFE ENERGY

15-year Design Lifespan

A+ Grade Lithium Iron Phosphate Cells

Model: Flex16-HBox-n(n=6,7...13)

GOODWE ET Series 25-50kW

Active Balancing Technology

Indoor installation

Smart Air-Cooled Battery

Energy Capacity: 96–208 kWh

Battery Voltage: 307.2–665.6 V



Features and Advantages

Safety Technology

- Grade A+ lithium iron phosphate cells
- The system features multi-level fuse protection
- Built-in aerosol fire suppression device at pack level

Flexible and Expandable

- Supports up to 12 clusters in parallel
- 96kWh~2507kWh capacity

Module Mixing

- Modules manufactured within one year can be mixed

Easy to Install and Use

- Modules use a wireless stacking connection
- Ergonomic handles provide a secure grip and better balance for lifting and manual handling

Compatible inverters

- Solis, iNVT, Fox ESS, GoodWe, Solinteg, and Deye

System Technical Parameters

Model		Flex16-HBox-13			
Battery Data					
Nominal Energy		208.99kWh			
Nominal Voltage		665.6V			
Battery Model		Flex16-HBox-13			
Battery Chemistry		Lithium Iron Phosphate(LiFePO4)			
Cycle Life[1]		≥8000 cycles			
Cell Specification		3.2V 314Ah			
Battery Pack Energy		16.076 kWh			
Cluster Configuration		1P208S			
Number of Clusters		1			
Operating Voltage		582.4V - 759.2V			
Recommended Charge/Discharge C-rate		0.5C (157A)			
Maximum Charge/Discharge C-rate		0.64C (200A)			
Peak Discharge Current (25°C)		280A			
Recommended Charge/Discharge Power		8.038 kW			
Maximum Charge/Discharge Power		10.24 kW			
Depth of Discharge (DOD)		95%			
Cell Balancing Technology		Active balancing			
Installation		Cableless stacking			
Scalability		up to 12 clusters in parallel (2507kWh)			
Safety					
Fire Extinguishing System		Integrated aerosol fire suppression device			
Inverter Data					
Rated Power		25kW	35kW	40kW	50kW
Please refer to the inverter section for more details.					
General					
Dimension(WxDxH)		2560 x 490 x 1810mm			
Weight		Approximately 1770kg			
IP Rating		IP20			
Cooling Method		Smart air cooling			
Operating Temperature		-20°C - +50°C			
Storage Temperature		-20°C - +45°C			
Relative Humidity		15%~90%(Non-condensing)			
Max. Operating Altitude		≤2000m			
Communication Interfaces		LAN/CAN/RS485/Wi-Fi			
Compliance		UN 38.3, MSDS, IEC 62619, IEC 61000			

* The actual product may have slight differences from some promotional videos or pictures. Please refer to the actual product. Unless otherwise specified, the data on this page are all from our company's laboratory. The data may have errors due to changes in the objective environment.

* The specifications are subject to change without prior notice.

[1]Test Conditions: Charge/discharge at 0.2C, 25°C, 95% depth of discharge (DOD), 70% end-of-life (EOL)

Product Selection Part 1

Flex16-HBox-n(n=6,7...13)				
Battery Model		Flex16-HBox-6	Flex16-HBox-7	Flex16-HBox-8
Number of battery packs		6	7	8
Nominal Energy		96.46 kWh	112.53 kWh	128.61 kWh
Nominal Voltage		307.2 V	358.4 V	409.6 V
String Configuration		1P96S	1P112S	1P128S
Operating Voltage		268.8 - 350.4 V	313.6 - 408.8 V	358.4 - 467.2 V
Dimension(W x D x H)	1 Column 2 Columns	830 x 490 x 1810 mm 2560 x 490 x 1120 mm	830 x 490 x 2040 mm 2560 x 490 x 1120 mm	830 x 490 x 2270 mm 2560 x 490 x 1350 mm
Weight		840 kg	990 kg	1120 kg

Product Selection Part 2


Flex16-HBox-n(n=6,7...13)				
Battery Model		Flex16-HBox-9	Flex16-HBox-10	Flex16-HBox-11
Number of battery packs		9	10	11
Nominal Energy		144.69 kWh	160.76 kWh	176.84 kWh
Nominal Voltage		460.8 V	512 V	563.2 V
String Configuration		1P144S	1P160S	1P176S
Operating Voltage		403.2-525.6 V	448 - 584 V	492.8 - 642.4 V
Dimension(W x D x H)	2 Columns	2560 x 490 x 1350 mm	2560 x 490 x 1580 mm	2560 x 490 x 1580 mm
	3 Columns	/	/	/
Weight		1250 kg	1380 kg	1510 kg
Battery Model		Flex16-HBox-12	Flex16-HBox-13	
Number of battery packs		12	13	
Nominal Energy		192.92 kWh	208.99 kWh	
Nominal Voltage		614.4 V	665.6 V	
String Configuration		1P192S	1P208S	
Operating Voltage		537.6-700.8 V	582.4-759.2 V	
Dimension(W x D x H)	2 Columns	2560 x 490 x 1810 mm	2560 x 490 x 1810 mm	
	3 Columns	/	/	
Weight		1640 kg	1770 kg	

High Voltage Box

Features and Advantages

- The product supports manual control and shunt trip control of the DC circuit breaker
- Built with high-reliability components and redundant protection design, the product withstands EMI, high temperature, and vibration ensuring high reliability and stability
- It supports temperature monitoring of busbars and power connectors in the high-voltage box to ensure system safety
- It provides accurate monitoring of battery cluster voltage, current, and insulation resistance status
- The front panel features operating status indicators for easy identification

Dimensions(WxDxH mm)

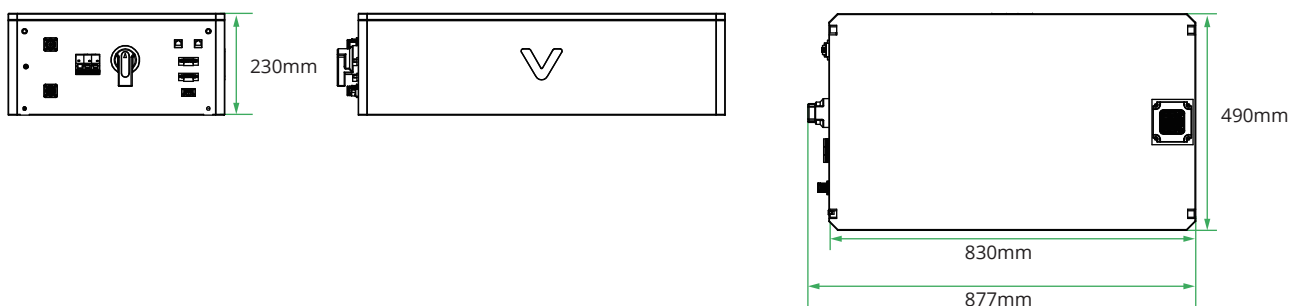


High Voltage Box Technical Parameters

Model	Flex16-HBox
Rated Voltage	DC1000V
Rated Current	250A
Insulation Resistance	$\geq 10 \text{ M}\Omega @ 1000 \text{ VDC}$
Dielectric Strength	3390 VDC, leakage current $\leq 1 \text{ mA}$, no breakdown or flashover
Operating Temperature	-20°C to +65°C
Storage Temperature	-25°C to +65°C
Relative Humidity	$\leq 95\%$
Cooling Method	Natural convection
Altitude	$\leq 2000 \text{ m}$
Dimensions (W×D×H mm)	830×490×230 mm
Weight	29 kg
Communication	CAN/RS485/LAN
Ingress Protection	IP20

Battery Pack

Dimensions(WxDxH mm)

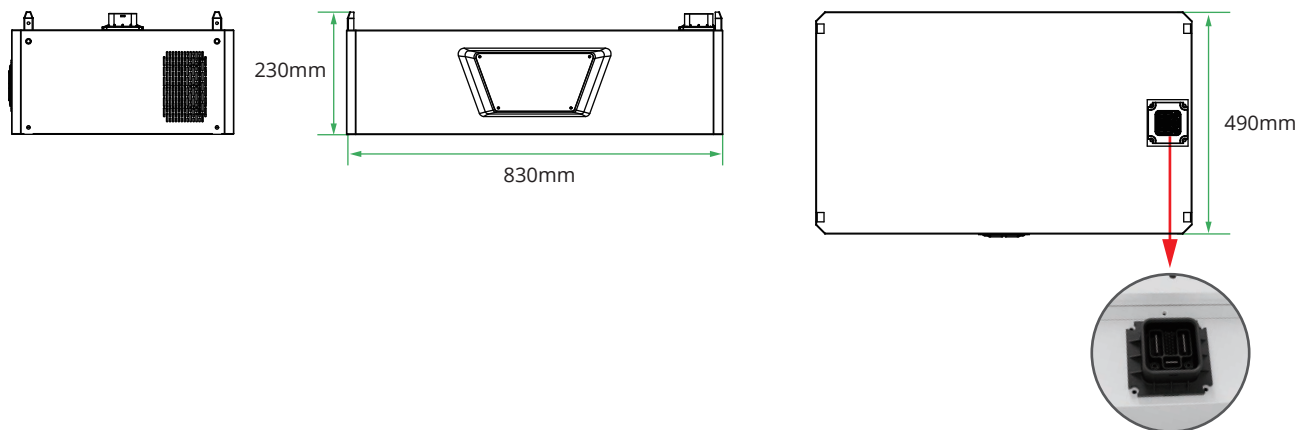

Battery Pack Technical Parameters

Model	Flex16-Unit
Nominal Energy	16.076 kWh
Nominal Voltage	51.2 V
Rated Capacity	314 Ah
Battery Balancing	Active balancing
Balancing Current	up to 2A
Recommended Charge/Discharge C-rate	0.5C (157A)
Maximum Charge/Discharge C-rate	0.64C (200A)
Peak Discharge Current (25°C)	280A - 300A
Recommended Charge/Discharge Power	8.038 kW
Maximum Charge/Discharge Power	10.24 kW
Operating Temperature	-20°C - +50°C
Storage Temperature	-20°C - +45°C
Dimensions(W x D x H mm)	830 x 490 x 230 mm
Battery Weight (Approx.)	113 Kg

Inverter Features

Flexible & Adaptable Applications

- Supports parallel connection in both on- and off-grid modes
- Up to 150% DC input oversizing
- 4 MPPTs, Max. efficiency up to 98.1%

Superb Safety & Reliability

- Optional Type I+II SPD on DC side¹
- IP66 protection for outdoor installation safety
- AFCI optional¹

Smart Control & Monitoring

- 110% unbalanced output
- UPS-level switching

Friendly & Thoughtful Design

- Elegant and compact design
- Plug & Play installations



Three Phase | High Voltage
Rated Power:25/30/45/50kW

Inverter Technical Parameters Part 1

Model	GW25K-ET-10*6		GW30K-ET-10*6		GW40K-ET-10		GW50K-ET-10	
Battery Input Data								
Battery Type*4					Li-Ion			
Nominal Battery Voltage					500			
Battery Voltage Range					200~800			
Start-up Voltage					200			
Number of Battery Input					1			
Max. Continuous Charging Current					100			
Max. Continuous Discharging Current					100			
Max. Charging Power	27500		33000		44000		55000	
Max. Discharging Power	27500		33000		44000		55000	
PV String Input Data								
Max. Input Power*1	50000		60000		60000		75000	
Max. Input Voltage*3					1000			
MPPT Operating Voltage Range*5					165 ~ 850			
Start-up Voltage					200			
Nominal Input Voltage					620			
Max. Input Current per MPPT	42 / 32 / 42		42 / 32 / 42		42 / 32 / 42		42 / 32 / 42 / 32	
Max. Short Circuit Current per MPPT	55 / 42 / 55		55 / 42 / 55		55 / 42 / 55		55 / 42 / 55 / 42	
Number of MPPT Trackers	3		3		3		4	
Number of Strings per MPPT					2			
AC Output Data (On-grid)								
Nominal Output Power	25000		30000		40000		50000	
Nominal Apparent Power Output to Utility Grid	25000		30000		40000		50000	
Max. Apparent Power Output to Utility Grid	25000		30000		40000		50000	
Max. Apparent Power from Utility Grid	25000		30000		40000		50000	
Nominal Output Voltage					380 / 400, 3L / N / PE			
Output Voltage Range*2					176 ~ 276			
Nominal AC Grid Frequency					50 / 60			
AC Grid Frequency Range					45 - 55 / 55 - 65			

Inverter Technical Parameters Part 2

Model	GW25K-ET-10*6	GW30K-ET-10*6	GW40K-ET-10	GW50K-ET-10
Max. AC Current Output to Utility Grid	37.9 @ 380V 36.3 @ 400V	45.5 @ 380V 43.6 @ 400V	60.6 @ 380V 58.0 @ 400V	75.8 @ 380V 72.5 @ 400V
Max. AC Current From Utility Grid	37.9 @ 380V 36.3 @ 400V	45.5 @ 380V 43.6 @ 400V	60.6 @ 380V 58.0 @ 400V	75.8 @ 380V 72.5 @ 400V
Power Factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)			
Max. Total Harmonic Distortion	<3%			
AC Output Data (Back-up)*requires additional STS box				
Back-up Nominal Apparent Power	25000	30000	40000	50000
Max. Output Apparent Power	27500 (30000 @ 60s) 37500 @ 10s	33000 (36000 @ 60s) 45000 @ 10s	44000 (48000 @ 60sec) 60000 @ 10sec	55000 (60000 @ 60sec) 75000 @ 10sec
Max. Output Current	41.7 @ 380V 39.8 @ 400V	50.0 @ 380V 47.8 @ 400V	66.7 @ 380V 63.8 @ 400V	83.3 @ 380V 79.7 @ 400V
Nominal Output Voltage	380 / 400, 3L / N / PE			
Nominal Output Frequency	50 / 60			
Output THDv (@Linear Load)	<3%			
Efficiency				
Max. Efficiency	98.1%			
European Efficiency	97.5%			
Max. Battery to AC Efficiency	97.7%			
MPPT Efficiency	99%			
Protection				
Residual Current Monitoring	Integrated			
PV Reverse Polarity Protection	Integrated			
Battery Reverse Polarity Protection	Integrated			
Anti-islanding Protection	Integrated			
AC Overcurrent Protection	Integrated			
AC Short Circuit Protection	Integrated			
AC Overvoltage Protection	Integrated			
DC Switch	Integrated			
DC Surge Protection	Type II			
AC Surge Protection	Type II			
AFCI	Optional			
Remote Shutdown	Integrated			
General Data				
Operating Temperature Range	-35 ~ +60			
Relative Humidity	0 ~ 95%			
Max. Operating Altitude	4000			
Cooling Method	Smart Fan Cooling			
User Interface	LED, WLAN + APP			
Communication with BMS	CAN			
Communication with Meter	RS485			
Communication with Portal	RS485, WiFi + LAN + Bluetooth, 4G + Bluetooth (Optional)			
Weight	62	62	62	65
Dimension (W × H × D mm)	520 × 660 × 260			
Topology	Non-isolated			
Self-consumption at Night (W)	<15			
Ingress Protection Rating	IP66			
Mounting Method	Wall Mounted			

*1: For most of the PV module, the max. Input power can achieve 2*Pn, Such as the max. input power of GW50K-ET can achieve 100kW.

*2: Output Voltage Range: phase voltage.

*3: When the input voltage is greater than 980V, the inverter will enter standby mode, and when the voltage returns to below 970V the inverter will return to normal operation.

*4: The Li-Ion battery usually contain two mainstream type: LFP and Ternary Lithium battery.

*5: Please refer to the user manual for the MPPT Voltage Range at Nominal Power.

*6: Only available in SEA, MENA and other regions, please contact sales for more information.