



Technical data

1-2 strings


Unit: mm

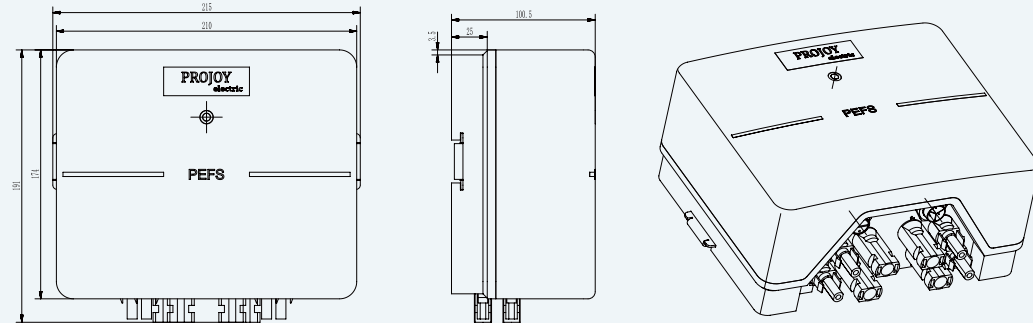

3-5 strings

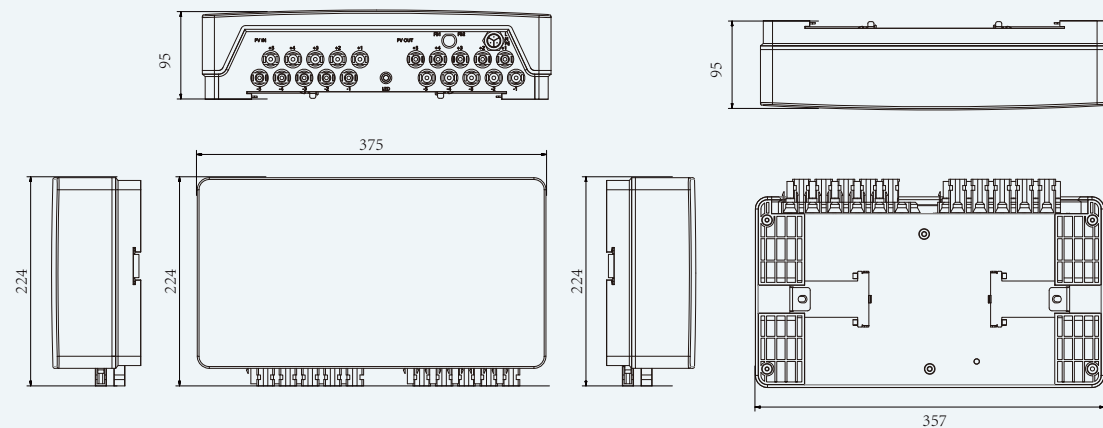


6-10 strings

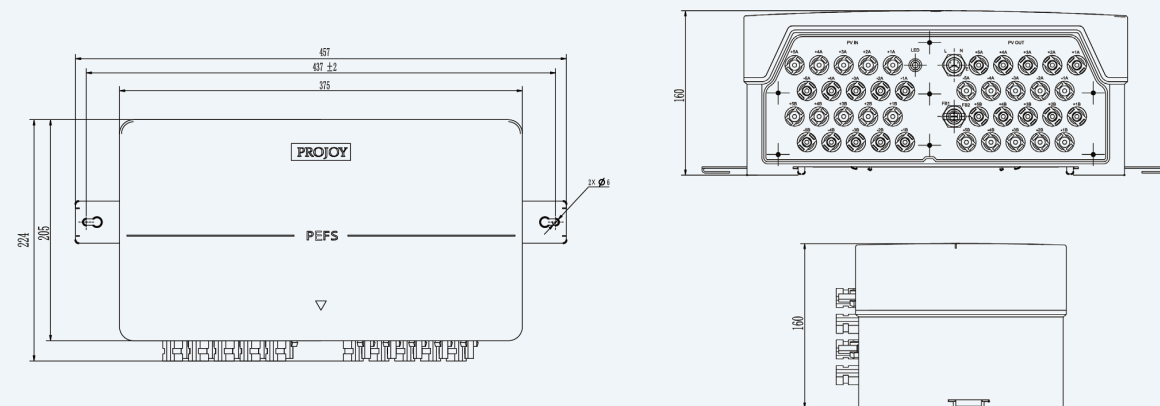

PV Safety Products

String Level Firefighter Safety Switch

1 ~ 10 Strings (12 Strings under Development)

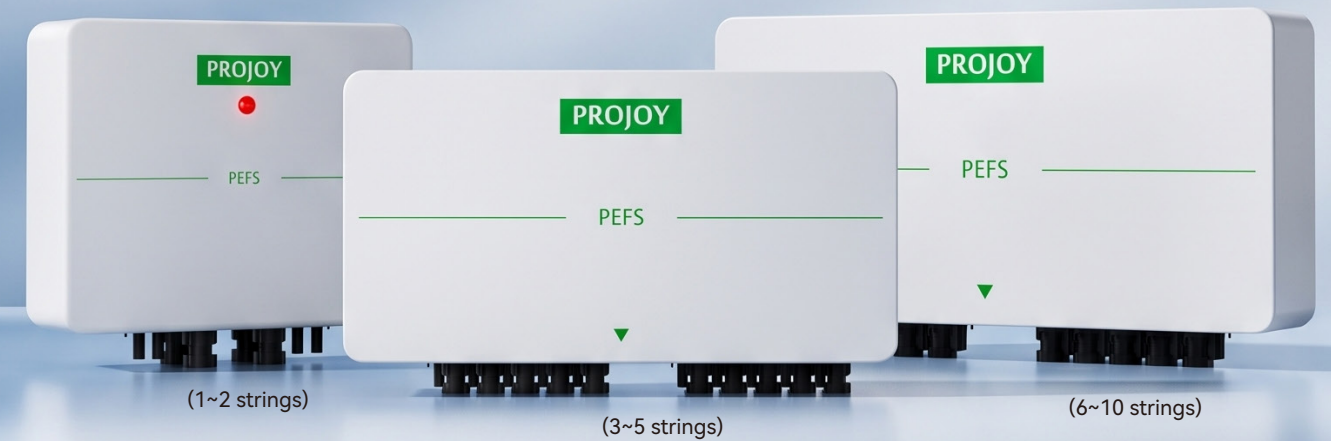

High Craftsmanship AND High Standards



Max 1500V
Max 55A



Flame retardant
UL94-V0



Easy Installation



Physical isolation



Outdoor installation
IP65



Over temperature
protection > 70 °C




FB1 FB2
function achieves
external monitoring

Projoy Electric Co., Ltd.


sales@projoy-electric.com www.projoy-electric.com +86 512 6620 4368

Diagram


- *Prevent DC-side hazards arising from DC arcing, cable aging, and module hot spots.
- *Passively or actively disconnect DC circuits in the event of a fire to minimize damage and protect the safety of firefighters and emergency responders.
- *Compliant with Automatic DC isolation requirements under standards including BS 7671:2018, I.S. 10101-7-712, IEC 60364-7-712 etc.

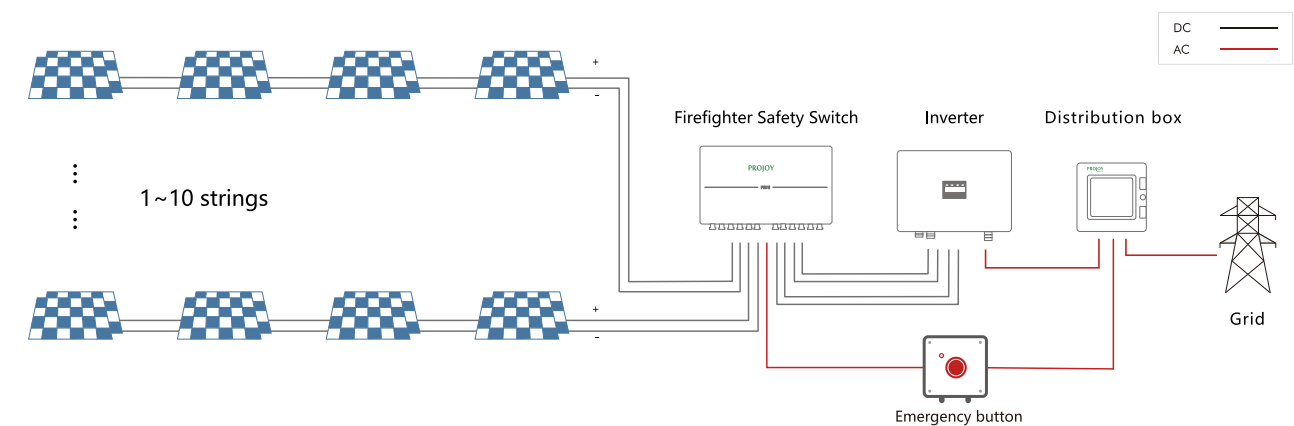

Tripping ways

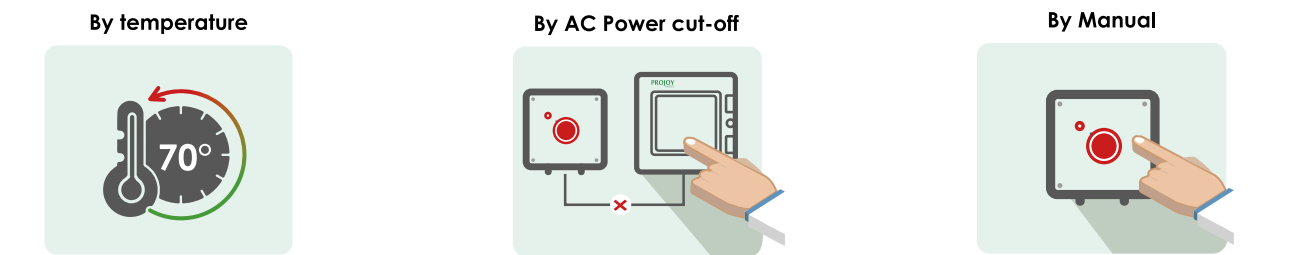

Contact Configuration

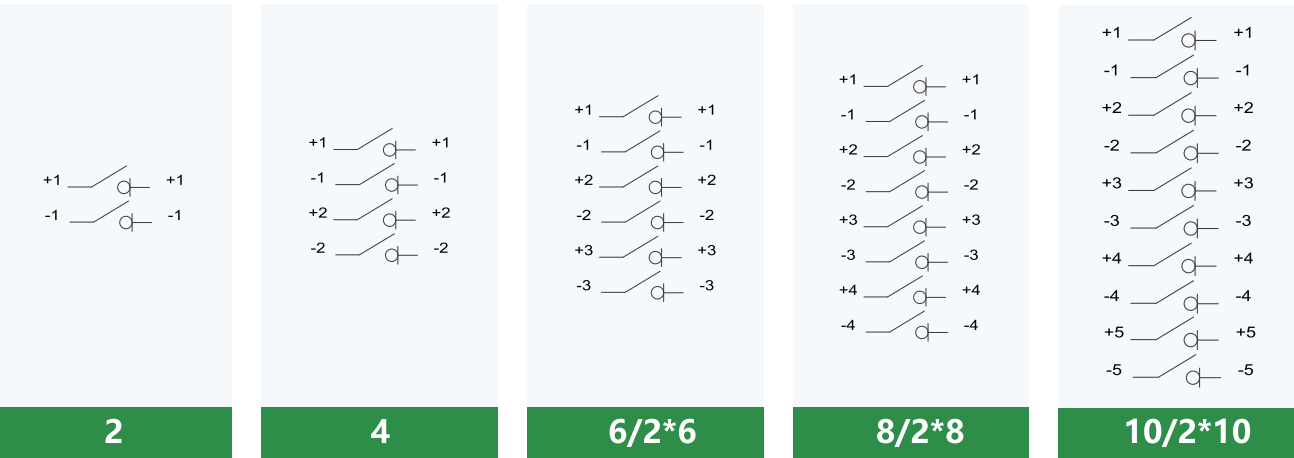

Technical data

Data of PEFS refer to built-in DC isolators. Data according to IEC60947-3(ed.3.2):2015. Utilization category DC-PV 1.						1-10 strings	Part Number
300V	600V	800V	1000V	1200V	1500V		
16A	16A	16A	9A	6A	3A	2/4/6/8/10/12/16/20	PEFS-EL16-Y-P2
25A	25A	22A	11A	8A	4A	2/4/6/8/10/12/16/20	PEFS-EL25-Y-P2
32A	32A	26A	13A	10A	5A	2/4/6/8/10/12/16/20	PEFS-EL32-Y-P2
40A	40A	30A	20A	15A	13A	2/4/6/8/10/12/16/20	PEFS-EL40-Y-P2
55A	55A	45A	33A	33A	18A	2/4/6/8/10/12/16/20	PEFS-EL55-Y-P2
40A	40A	40A	40A	30A	20A	2/4/6/8/10/12/16/20	PEFS-EL40H-Y-P2
50A	50A	50A	50A	40A	30A	2/4/6/8/10/12/16/20	PEFS-EL50H-Y-P2

Technical Parameter	1-2 strings		3-5 strings	6-10 strings
Main Parameters				
System voltage (Vdc)	300~1500			
Max current (A)	55			
Number of strings	1/2	3/4/5		6/8/10
Poles	2/4	6/8/10		12/16/20
Operating voltage	100Vac - 270Vac			
Nominal voltage	230Vac			
Nominal current	30mA	30mA		60mA
Operating temperature	-40°C - +70°C			
Automatically switch off by temperature	+70°C			
FB1 FB2 function (Standard configuration)	Contact Capacity: 250VAC,16A			
Storage temperature	-40°C - +85°C			
Ingress protection level	IP66	IP65		
Protection level	Class II			
Certification	CE			
Regulations compliance	EN 60947-1&3			
Mechanical life	10000			
Electrical life	>1500			