Repubblica di San Marino
Autorità per l'Omologazione
Republic of San Marino
Authority for Homologation

Via Consiglio dei Sessanta, 99
47891 Dogana - Repubblica di San Marino

Comunicazione
Communication

	Concernente [2/] *Concerning [2/]*	**Il rilascio dell'omologazione** ***Approval granted*** ~~L'estensione dell'omologazione~~ ~~*Approval extended*~~ ~~Il rifiuto dell'omologazione~~ ~~*Approval refused*~~ ~~La revoca dell'omologazione~~ ~~*Approval withdrawn*~~ ~~La cessazione definitiva della produzione~~ ~~*Production definitively discontinued*~~

of a type of mechanical coupling device or component pursuant to Regulation No. 55.

Omologazione N. ***Approval No.***	**E57*55R03/00*0158**	**Estensione N.** ***Extension No.***	**00**

Marchio di omologazione ***Approval mark***	E57 **55R – 03 0158**

1. Trade name or mark of the device — GMC Hitch Coupling
2. Manufacturer's name for the type of device or component: — 3000
3. Manufacturer's name and address: — GMC HITCH TECHNOLOGY
Kohagsgatan 12
56149 Huskvarna, Sweden
4. If applicable, name and address of manufacturer's representative: — Not Applicable

5.	Alternative supplier's names or trademarks applied to the device or component:	Not Applicable
6.	Name and address of company or body taking responsibility for the conformity of production:	DONGYING WANLONG MECHANICAL MOULD CO., LTD. No.17 Chuanghui Road, Niuzhuang New Farmers Pioneer Park, Dongying District, Dongying City, Shandong Province (China)
7.	Submitted for approval on:	01/04/2025
8.	Technical Service responsible for conducting approval tests:	**AUTOMOTIVE TECHNICAL SERVICE S.r.l.** Via Consiglio dei Sessanta, 99 47891 – DOGANA Repubblica di San Marino
9.	Brief description:	See Information document No. IF_R55.03_Component_3000_00
9.1.	Type and class of device or component:	Type: 3000 Class: B50-X
9.2.	Characteristic values:	
9.2.1.	Primary values:	D/Dc= 14.208 kN S= 150 kg U= N/A V= N/A
9.2.2.	Alternative values:	N/A
9.3.	For Class A mechanical coupling devices or components, including towing brackets:	N/A
9.4.	For Class B coupling heads, is the coupling head intended to be fitted to an un braked O1 trailer:	No
10.	Instructions for the attachment of the coupling device or component type to the vehicle and photographs or drawings of the mounting points (see Annex 2, Appendix 1) given by the vehicle manufacturer	See Information document No. IF_R55.03_Component_3000_00
11.	Information on the fitting of any special reinforcing brackets or plates or spacing components necessary for the attachment of the coupling device or component (see Annex 2, Appendix 1):	See Information document No. IF_R55.03_Component_3000_00

12.	Additional information where the use of the coupling device or component is restricted to special types of vehicles - see Annex 5, paragraph 3.4.	See Information document No. IF_R55.03_Component_3000_00
13.	For Class K hook type couplings, details of the drawbar eyes suitable for use with the particular hook type:	N/A
14.	Date of test report:	10/05/2025
15.	Number of report :	ATS-SM-IR-55-22811
16.	Position of approval mark on the device	See Information document No. IF_R55.03_Component_3000_00
17.	Reason(s) for extension of approval:	N/A
18.	Approval has been:	**GRANTED** / ~~extended / refused / withdrawn~~[2]
19.	Place:	Dogana – Repubblica di San Marino
20.	Date:	03/07/2025
21.	Signature:	

Ing. Marco Conti
Direttore Generale
General Director

22. The list of documents deposited with the Type Approval Authority which has granted approval is annexed to this communication and may be obtained on request:
Drawings, diagrams, information folder considered to be of importance for the purposes of this Regulation;
Where applicable drawings of the protective devices and their position on the vehicle.

Enclosures:

1. *- Index of information package*
2. *Information package*

(1) Distinguishing number of the country which has granted/refused/withdrawn approval (see approval provisions in the Regulation).
(2) Strike out which does not apply.

Allegato *Enclosure*				
Al certificato di omologazione ECE N. *To ECE approval certificate No.*	**E57*55R03/00*0158*00**			
Indice del fascicolo di omologazione *Index to the information package*				
Data *Date of issue*	**03/07/2025**	**Data ultima modifica** *Last amendment date*	--	
1.	**Clausole di garanzia e istruzioni sul diritto di presentare ricorso** *Collateral clauses and instruction on right to appeal*			
2.	**Rapporto(i) Finale di Ispezione N.** *Test report(s) No.*	**ATS-SM-IR-55-22811**	**Data** *Date*	**10/05/2025**
3.	**Scheda informativa N.** *Information document No.*	**IF_R55.03_Component_3000_00**	**Data** *Date*	**05/04/2025**
			Data ultima modifica *Last amendment date*	--

Clausole di garanzia e istruzioni sul diritto di presentare ricorso

Clausole di garanzia

La produzione in serie deve essere esattamente conforme ai documenti di omologazione. Le variazioni di produzione in serie sono consentite solo con il consenso espresso del **Autorità per l'Omologazione**.

Le variazioni del nome della società, l'indirizzo e lo stabilimento di produzione, nonché una delle parti che hanno l'autorità alla consegna o eventuali rappresentanti nominati al momento del rilascio dell'omologazione, devono essere immediatamente comunicate al **Autorità per l'Omologazione**. La violazione di queste regole può portare al ritiro dell'omologazione ed inoltre può essere legalmente perseguita.

L'omologazione decade se viene restituita o ritirata o se il tipo omologato non è più conforme ai requisiti di legge. La revoca può essere fatta se non esistono più i requisiti richiesti per il rilascio e la continuazione dell'omologazione, se il titolare dell'omologazione viola gli obblighi dettati dall'omologazione, anche nel caso in cui gli obblighi derivino dalle condizioni assegnate all'interno dell'omologazione, o se è accertato che il tipo approvato non è conforme ai requisiti di sicurezza del traffico e di tutela dell'ambiente.

L'**Autorità per l'Omologazione** può verificare la corretta applicazione della delega conferita rilasciata nella presente omologazione, in qualsiasi momento. In particolare, questo include la verifica della produzione, che sia conforme, nonché le misure di controllo di conformità della produzione. Per questo, possono essere presi dei campioni dalla produzione. I dipendenti o rappresentanti dell'**Autorità per l'Omologazione** possono avere accesso senza ostacoli agli impianti di produzione e stoccaggio.

La delega conferita contenuta nella presente omologazione non è trasferibile. I diritti del marchio di terzi non sono interessati da questa omologazione.

Istruzione su diritto di ricorso

Questa omologazione è appellabile entro un mese dalla notifica. Il ricorso deve essere presentato per iscritto o come una domanda inviata all' **Autorità per l'Omologazione** - Via Consiglio dei Sessanta, 99 - 47891 Dogana - Repubblica di San Marino.

********** **********

Collateral clauses and instruction on right to appeal

Collateral clauses

*The individual production of serial fabrication must be in exact accordance with the approval documents. Changes in the individual production are only allowed with express consent of the **Authority for Homologation**.*

*Changes in the name of the company, the address and the manufacturing plant as well as one of the parties given the authority to delivery or authorized representative named when the approval was granted is to be immediately disclosed to the **Authority for Homologation**. Breach of this regulation can lead to recall of the approval and moreover can be legally prosecuted.*

The approval expires if it is returned or withdrawn or if the type approved no longer complies with the legal requirements. The revocation can be made if the demanded requirements for issuance and the continuance of the approval no longer exist, if the holder of the approval violates the duties involved in the approval, also to the extent that they result from the assigned conditions to this approval, or if it is determined that the approved type does not comply with the requirements of traffic safety or environmental protection.

*The **Authority for Homologation** may check the proper exercise of the conferred authority taken from this approval at any time. In particular this means the compliant production as well as the measures for conformity of production. For this purpose samples can be taken or have taken. The employees or the representatives of the **Authority for Homologation** may get unhindered access to the production and storage facilities.*

The conferred authority contained with issuance of this approval is not transferable. Trade mark rights of third parties are not affected with this approval.

Instruction on right to appeal

*This approval can be appealed within one month after notification. The appeal is to be filed in writing or as a transcript at the **Authority for Homologation** - Via Consiglio dei Sessanta, 99 - 47891 Dogana - Repubblica di San Marino.*

Inspection Report No.:	ATS-SM-IR-55-22811
Of:	10/05/2025
Type:	3000
Manufacturer:	GMC HITCH TECHNOLOGY

Inspection Report

No. ATS-SM-IR-55-22811

Inspection concerning ~~vehicles~~ / components with regard to

Mechanical coupling components of combinations of vehicles

performed according to

ECE Regulation No. 55

as last amended by

03 series of amendments

of the Economic Commission for Europe

Approval status	
	Number of approval
ECE	**E57*55R03/00*0158*00**

0.	**General information**	
0.1.	Make (trade name of manufacturer):	GMC Hitch Coupling
0.2.	Type:	3000
0.2.1	Version:	N/A
0.3.	Type and class of the device:	Class B50-X
0.4.	Manufacturer's name and address:	GMC HITCH TECHNOLOGY Kohagsgatan 12 56149 Huskvarna, Sweden
0.4.1.	Name and address of manufacturer's authorized representative:	N/A
0.4.2.	Production plant(s) address(es):	DONGYING WANLONG MECHANICAL MOULD CO., LTD. No.17 Chuanghui Road, Niuzhuang New Farmers Pioneer Park, Dongying District, Dongying City, Shandong Province (China)
0.5.	Information document:	
	No.	IF_R55.03_Component_3000_00
	Date of issue:	05/04/2025
	Date of last change:	05/04/2025
0.6.	Position of the approval mark:	Method of affixing: Adhesion refer to Information document Annex 1

1.	**Test object**	
1.1.	Description:	This is a single specification and no worst case.
1.2.	Type / Trade Name:	3000
1.2.1	Variant / Version:	N/A
1.3	Characteristics value:	D: 14.208 kN U: N/A V: N/A S: 150 kg
1.4	Permissible maximum laden mass:	N/A
1.5	Maximum mass on the steered axle:	N/A
1.6	Maximum mass of the trailing vehicle:	N/A
1.7	Construction:	N/A
1.8.	Remarks:	N/A

2. ***Test records***

2.1. *Testing equipment:*

2.2.1. *Measuring equipment:* Fatigue test system

2.3 *Conformity with the information document and related attached drawings:* SI / *YES* [X] NO / *NO* [-] NR / *NA* [-]

The following points are given according the numbering system of ECE R55 Regulation:

4 / R55	**GENERAL REQUIREMENTS**	**Conformity**	**Notes:**
4.1 / R55	Each sample shall conform to the dimensional and strength specifications set out in Annexes 5 and 6. Following the tests specified in Annex 6 there shall not be any cracks, fractures or any excessive permanent distortion which would be detrimental to the satisfactory operation of the device or component.	*Yes*	*N/A*
4.2 / R55	All parts of the mechanical coupling device or component whose failure could result in separation of the vehicle and trailer shall be made of steel. Other materials may be used provided that equivalence has been demonstrated by the manufacturer to the satisfaction of the Type Approval Authority or Technical Service of the Contracting Party applying this Regulation.	*Yes*	*N/A*
4.3 / R55	The mechanical coupling devices or components shall be safe to operate and coupling and uncoupling shall be possible by one person without the use of tools.	*Yes*	*N/A*
4.4 / R55	The mechanical coupling devices or components shall be designed and manufactured such that in normal use and with correct maintenance and replacement of wearing parts they will continue to function satisfactorily and retain the characteristics prescribed by this Regulation.	*Yes*	*N/A*
4.5 / R55	All mechanical coupling devices or components shall be designed to have positive mechanical engagement and the closed position shall be locked.	*Yes*	*N/A*

4.6 / R55	Every device or component shall be accompanied by installation and operating instructions giving sufficient information for any competent person to install it correctly on the vehicle and operate it properly. The instructions shall be in at least the language of the country in which it will be offered for sale. In the case of devices and components supplied for original equipment fitting by a vehicle manufacturer or bodybuilder, installation instructions may be dispensed with but the vehicle manufacturer or bodybuilder will be responsible for ensuring that the vehicle operator is supplied with the necessary instructions for correct operation of the coupling device or component.	*Yes*	*N/A*
4.7 / R55	For devices and components of Class A, or Class S, if applicable, for use with trailers of maximum permissible mass not exceeding 3.5 tonnes, and which are produced by manufacturers not having any association with the vehicle manufacturer and where the devices and components are intended for fitting in the after-market, the height and other installation features of the coupling shall, in all cases, be verified by the Type Approval Authority or Technical Service in accordance with Annex 7, paragraph 1.	*Not Applicable*	*N/A*
4.8 / R55	For heavy duty and other non-standard miscellaneous coupling devices or components, Class S and Class T, the relevant requirements in Annexes 5, 6 and 7 for the closest standard or non-standard device or component shall be used.	*Not Applicable*	*N/A*
4.8.1 / R55	The attachment points for a secondary coupling and/or breakaway cable shall be positioned such that when in use, the secondary coupling or breakaway cable does not restrict the normal articulation of the coupling or interfere with the normal inertia braking system operation. A single attachment point shall be positioned within 100 mm of a vertical plane passing through the center of articulation of the coupling. If this is not practicable, two attachment points shall be provided, one on each side of the vertical center line and equidistant from the center line by a maximum of 250 mm. The attachment point(s) shall be as rearward and as high as practicable.	*Not Applicable*	*N/A*

4. Other information

Place of inspection:	CRAT Testing & Certification Co., Ltd. No. 2. Xinrui Road, Huangpu District, Guangzhou, Guangdong, China
Date of inspection:	03/05/2025-08/05/2025

Technical service representative:	**Senior Inspector**	**Junior Inspector (if applicable)**
	Charlie Li	N/A

Manufacturer's representative:	N/A
Remarks:	N/A

4.1 Appendix

1. List of modifications
2. Test Photo (s)
3. List of Main Equipment(s)

4.2 Enclosures

Information Folder	IF_R55.03_Component_3000_00 05/04/2025

5. Statement of conformity

The information document as given in paragraph 0.4 and the type described there are in compliance with the test specification mentioned above.

With regard to the required level of performance to be achieved, the tested items were representative for the type to be approved and cover all variants / versions described in the information folder

The tests were carried out in accordance with the relevant requirements of EN ISO/IEC 17025:2005 and EN ISO/IEC 17020 / R55-03 ECE/UN.

The tested object complies / ~~not complies~~ with the prescriptions of the R55-03 ECE/UN

The Inspection report comprises pages 1 to 15.

The test results relates only to the product tested.

I shall not be reproduced except in full, without written approval of the Technical Service.

Dogana, Repubblica di San Marino, 10/05/2025

Number of project and protocol	***Originality Check*** (*) **ATS-SM-PR-22811**	**Automotive Technical Service S.r.l.** ***Inspector*** (Charlie Li) **Automotive Technical Service S.r.l.** ***Deputy Technical Director*** (Eng. Bogdan Nicolae Domnescu)	AUTOMOTIVE TECHNICAL SERVICE S.r.l. · Via Consiglio dei Sessanta, 99 · 47891 RSM · ATS Technical Service RSMAO-01

(*) To check the originality of documents, scan the QR Code or connect to the site https://www.ats.sm/originality-control-atp-adr-tyapp/ and follow the instruction in it.

Appendix 1

List of modifications **Applicable / Not Applicable** **Appendix 1**

More details for application of: **Date :**

Correction of : -


Modification of : -

Addition of : -

Deletion of : -

Appendix 2

Test Photo(s) **Applicable / ~~Not Applicable~~** **Appendix 2**

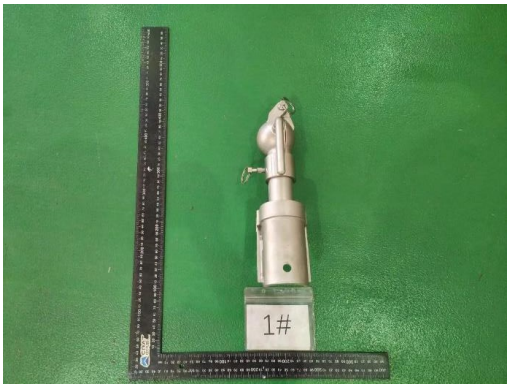

The towing bracket before test




The towing bracket after test



The towing bracket during test



The towing bracket during test

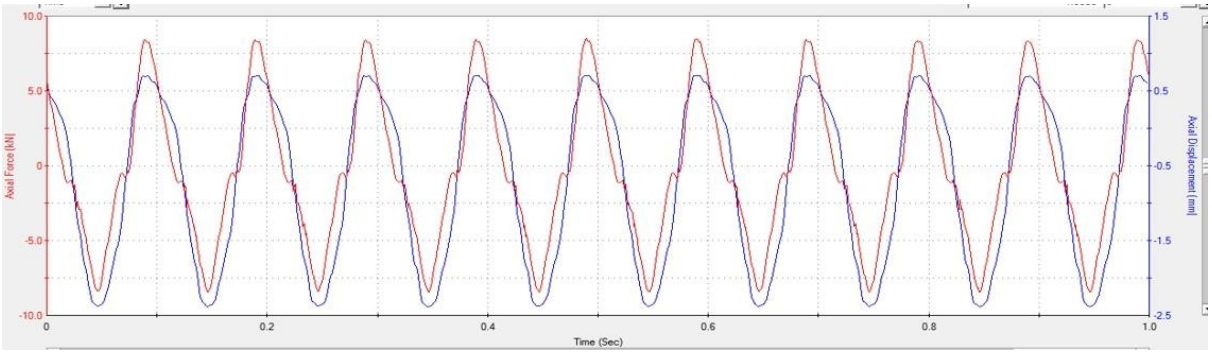

The waveform of test

Appendix 3

List of main equipment **Applicable / ~~Not Applicable~~** **Appendix 3**

No.	Name	Type	Serial No.	Valid Until
1	Fatigue test system	FLEX TEST100	CJ004	14/06/2024-13/06/2025

All the instruments have been calibrated and are in the period of validity.

APPLICATION FOR TYPE APPROVAL PURSUANT TO ECE REGULATION No. 55.03 RELATING TO MECHINAL COUPLING COMPONENTS OF COMBINATIONS OF VEHICLES

Component: Hitch Coupling

Type: 3000

Signature of a responsible person: 

Place: Chengde China

Date: 05/04/2025

Confirmation

We declare hereby that the specimen submitted for this approval test has been manufactured and assembled on conditions of ordinary mass production and that they are compatible with enclosed documentation.

Signature of a responsible person: 

Place: Chengde China

Date: 05/04/2025

1.	Make (trade name of manufacturer):	GMC Hitch Coupling
2.	Type and general commercial description:	3000 Hitch Coupling
2.1.	Variant(s):	N/A
3.	Name and address of manufacturer:	GMC HITCH TECHNOLOGY Kohagsgatan 12 56149 Huskvarna, Sweden
4.	Name and address of authorized representative, if any:	N/A
5.	Location and method of affixing of the approval mark:	Location: refer to Annex 1 Method of affixing: By stickers
6.	Name(s) and address(es) of assembly plant(s):	DONGYING WANLONG MECHANICAL MOULD CO., LTD. No.17 Chuanghui Road, Niuzhuang New Farmers Pioneer Park, Dongying District, Dongying City, Shandong Province (China)

7. Brief description:


The towbar assy of type 3000 can tow a trailer weight of 1500kg. The towbar assy mass is not more than 25kg. The towbar assy surface treatment black paint, black paint shall not have flow marks, paint and bruises and other defects, the paint surface is smooth and uniform. The trailer hook cross beam and body lap fastener is M10 bolt (quality 12.9, tightening torque 75-100Nm), this lap bolt with the body is not part of delivery.

7.1.	Type of device or component:	3000
7.2.	Class of device or component:	Class B50-X
7.3.	Characteristic values:	
7.3.1.	Primary values:	D= 14.208 kN S= 150 kg U= N/A V= N/A
7.3.2	Alternative values:	N/A
7.4.	For Class A mechanical coupling devices or components, including towing brackets:	N/A
7.5.	For Class B coupling heads, is the coupling head intended to be fitted to an unbraked O1 trailer:	No


8.	Details of the coupling device:	Refer to Annex 1 and Annex 2
9.	Instructions for the attachment of the coupling device or component typeto the vehicle and photographs or drawings of the mounting points givenby the vehicle manufacturer:	Refer to Annex 4
10.	Information on the fitting of any special reinforcing brackets or plates or spacing components necessary for the attachment of the coupling deviceor component:	Refer to Annex 3
11.	Additional information where the use of the coupling device or component is restricted to special types of vehicles:	N/A
12.	For Class K hook type couplings, details of the drawbar eyes suitable foruse with the particular hook type:	N/A

No.	ANNEX
1	Assembly Diagram
2	Component Diagram
3	Sketch of the Connection between Bracket and Vehicle
4	Installation and disassembly instruction


Annex 1: Assembly Diagram

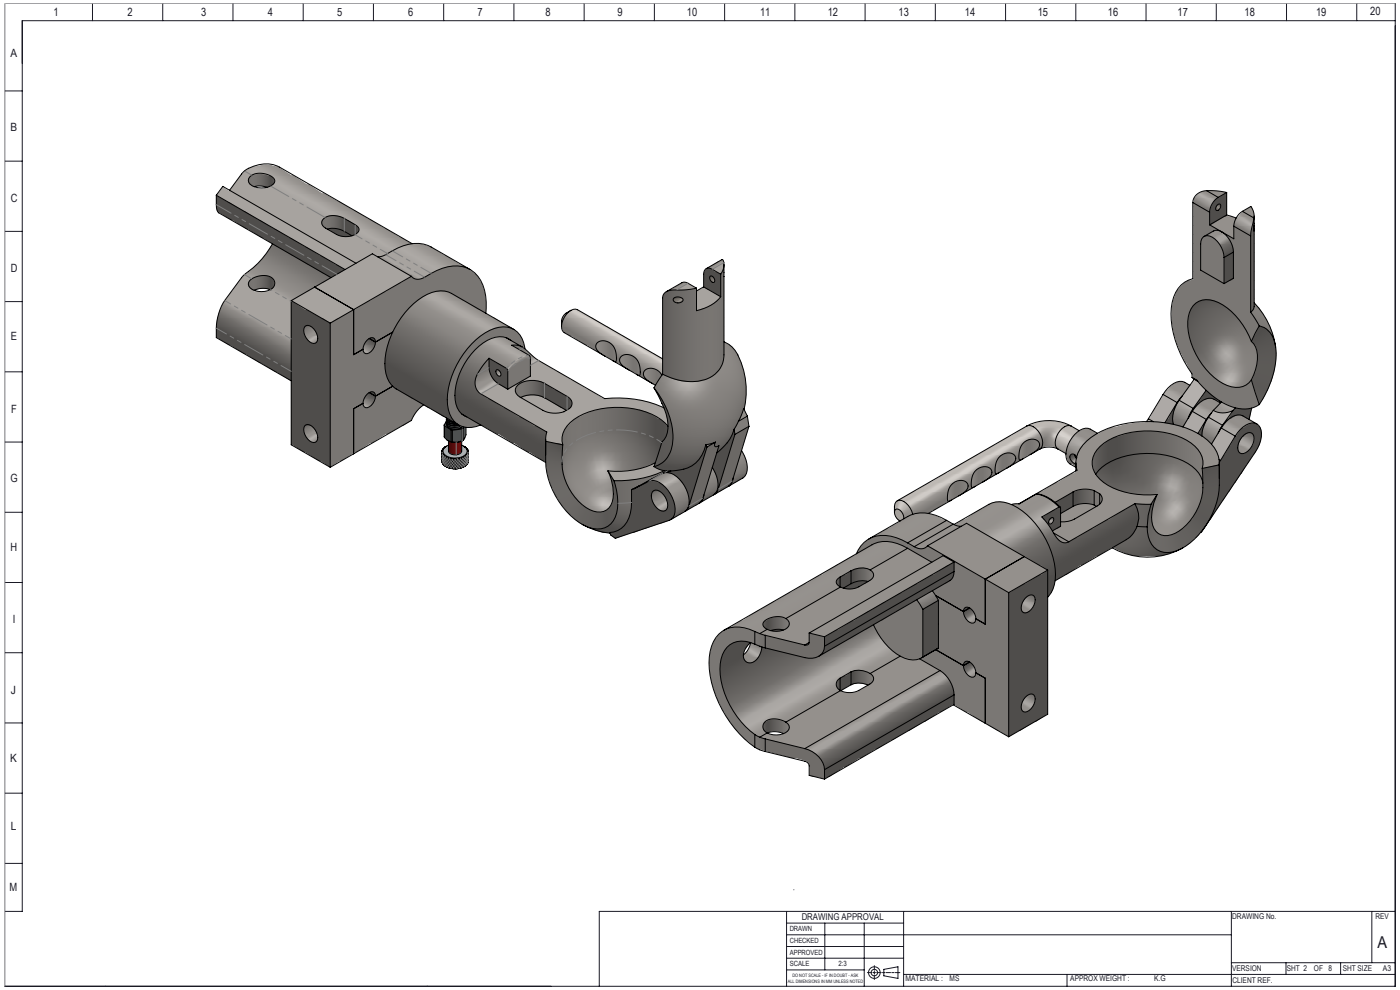

Annex 1: Assembly Diagram

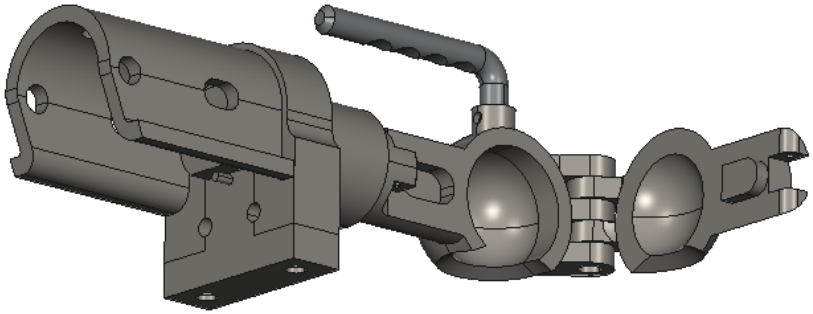


Annex 1: Assembly Diagram

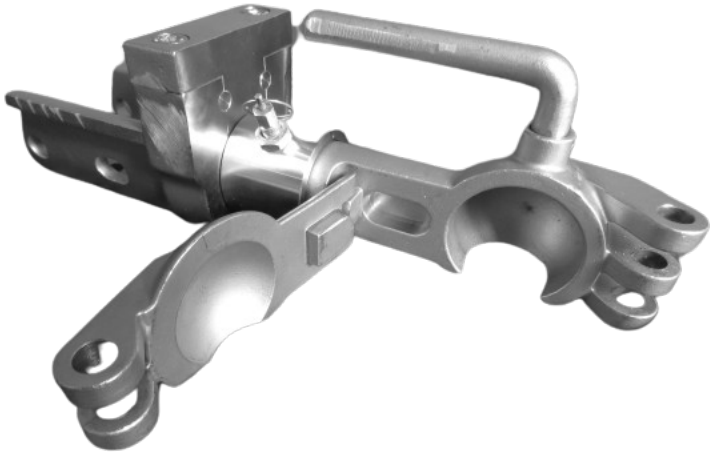







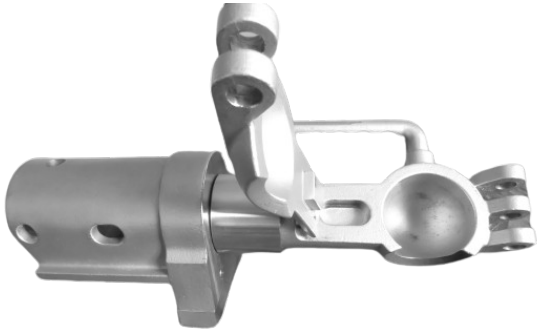


Annex 2: Component Diagram

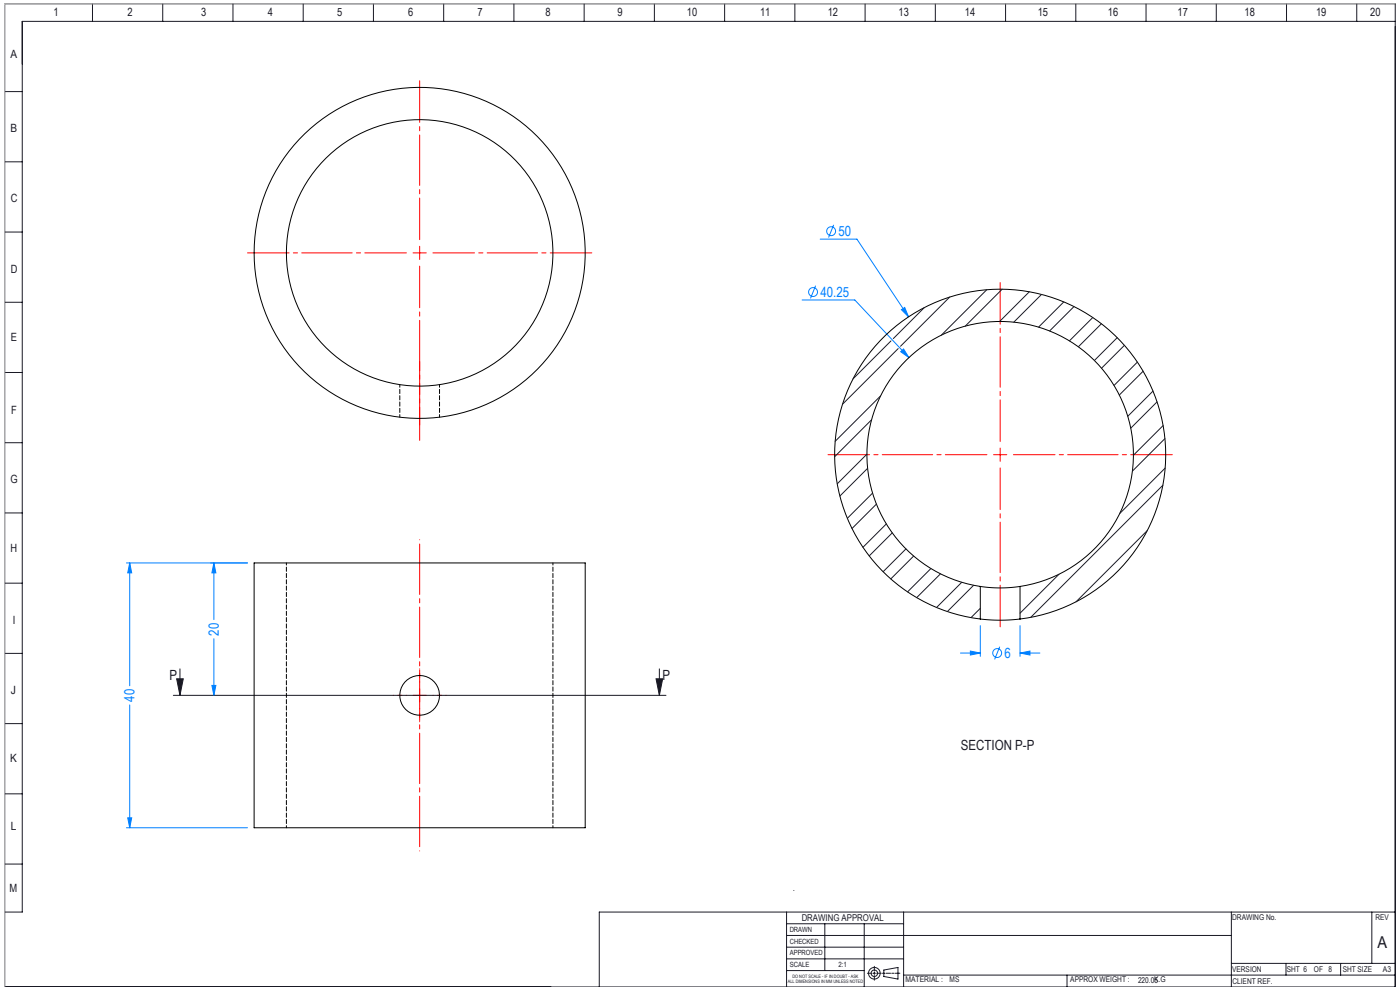







Annex 2: Component Diagram

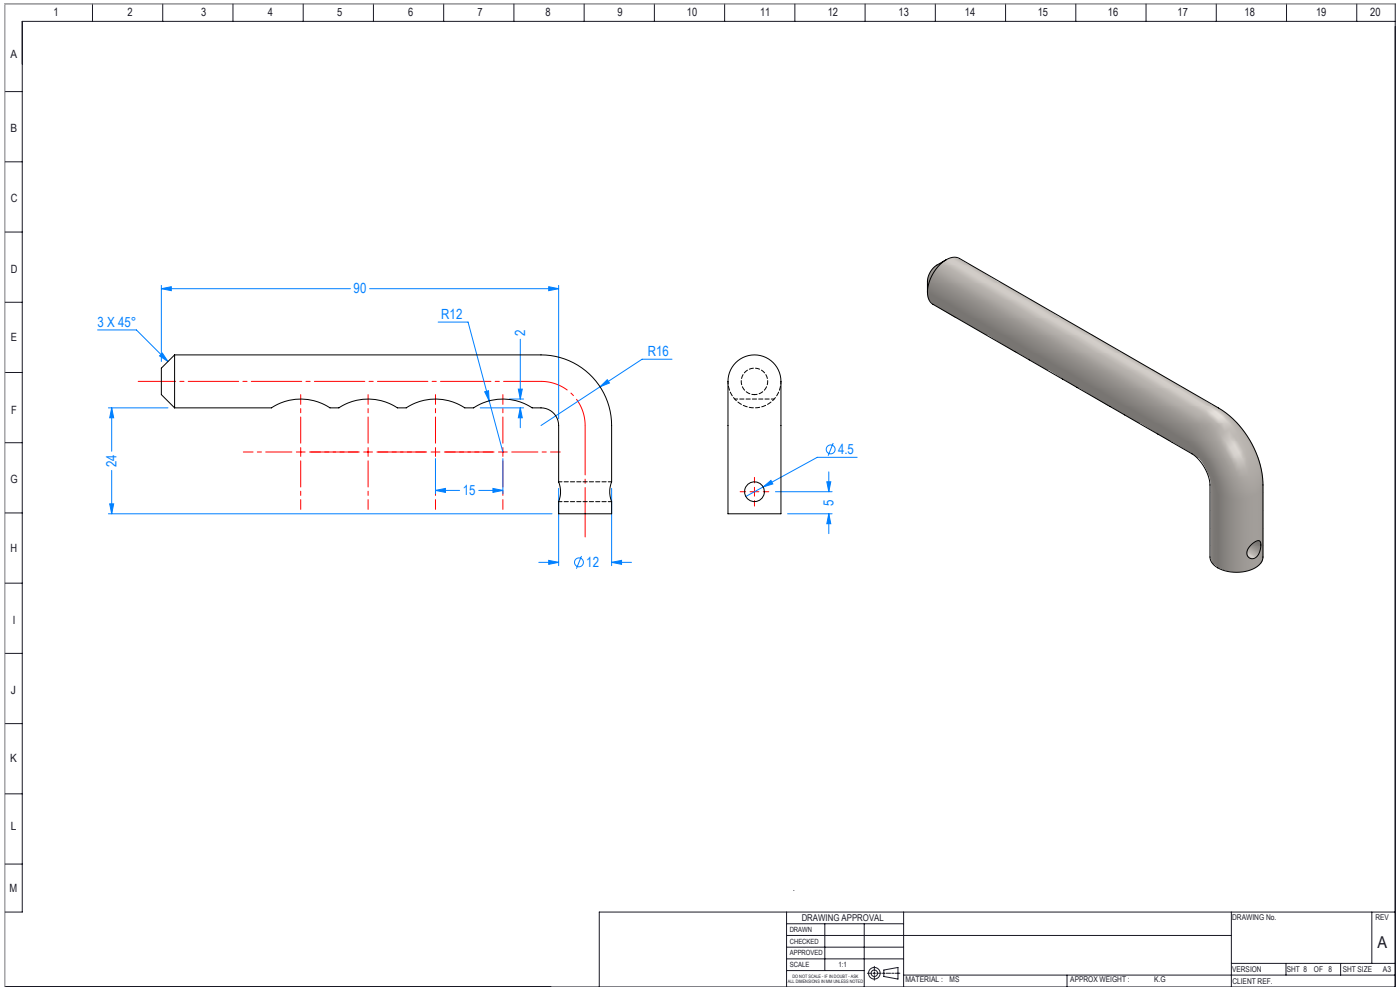

Annex 3: Sketch of the Connection between Bracket and Vehicle

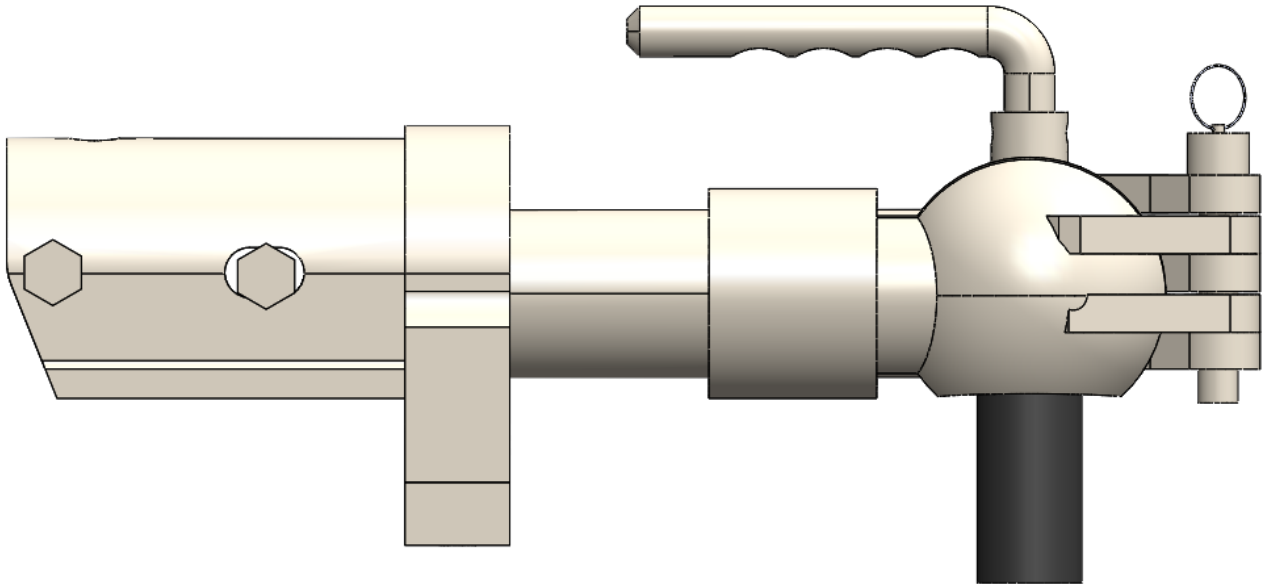

Annex 4: Installation and disassembly instruction

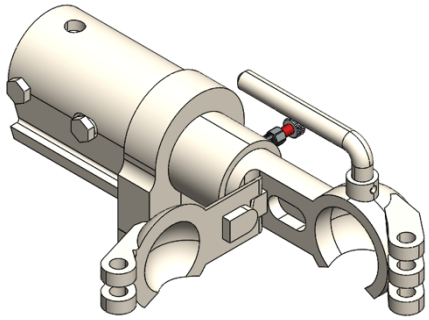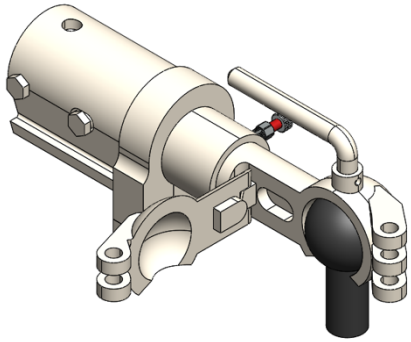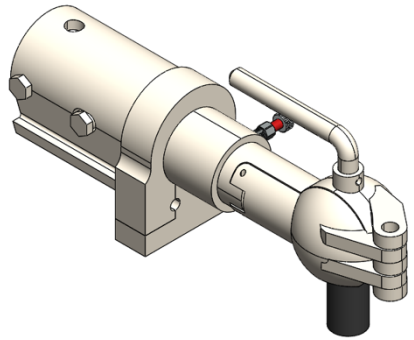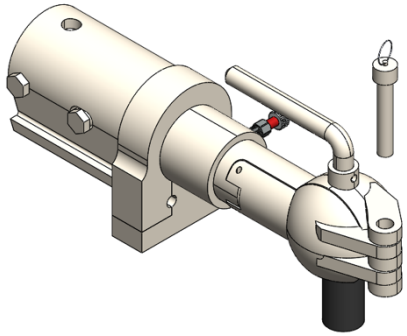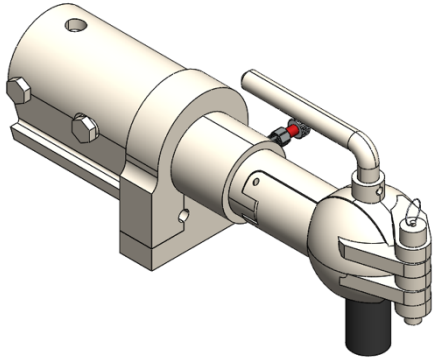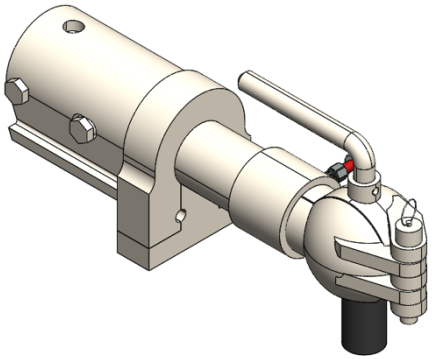		
1. Open the hitch coupling	2. Connect the hitch coupling and coupling ball	3. Close the hitch coupling
		
4. Prepare the safety latch	5. Insert the safety latch into the slot	6. Move the hitch coupling protection device upward