

NHD-5.0-800480TF-ATXL#

TFT (Thin-Film-Transistor) Color Liquid Crystal Display Module

| | |
|---------|---|
| NHD- | Newhaven Display |
| 5.0- | 5.0" Diagonal |
| 800480- | 800xRGBx480 Pixels |
| TF- | Model |
| A- | Built-in Driver / No Controller |
| T- | White LED Backlight |
| X- | TFT |
| L- | MVA, Enhanced Optical Characteristics, Wide Temperature |
| # | RoHS Compliant |

Newhaven Display International, Inc.

2661 Galvin Court

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com


nhsales@newhavendisplay.com

Document Revision History



| Revision | Date | Description | Changed by |
|----------|-----------|---|------------|
| 0 | 3/20/2013 | Initial Release | AK |
| 1 | 8/28/2013 | Electrical characteristics updated | AK |
| 2 | 9/16/2014 | Electrical characteristics updated | ML |
| 3 | 9/2/15 | Driver, Electrical, Optical characteristics updated | AK |
| 4 | 10/30/15 | Backlight lifetime rating added, Datasheet Reformat | SB |
| 5 | 2/23/16 | Corrected Notes on Drawing | SB |
| 6 | 4/5/16 | Brightness Updated | SB |
| 7 | 7/22/16 | Updated Mechanical Drawing, Electrical Characteristics | TM |
| 8 | 4/14/17 | Supply Current Updated | SB |
| 9 | 10/5/18 | Driver IC Updated & Chromaticity Added | SB |
| 10 | 7/10/19 | Timing Characteristics Updated | SB |
| 11 | 1/14/20 | Driver Change to ILI6122, Optical Characteristics Updated | SB |
| 12 | 4/10/20 | Added Information for DE Mode Operation | TM |

Functions and Features

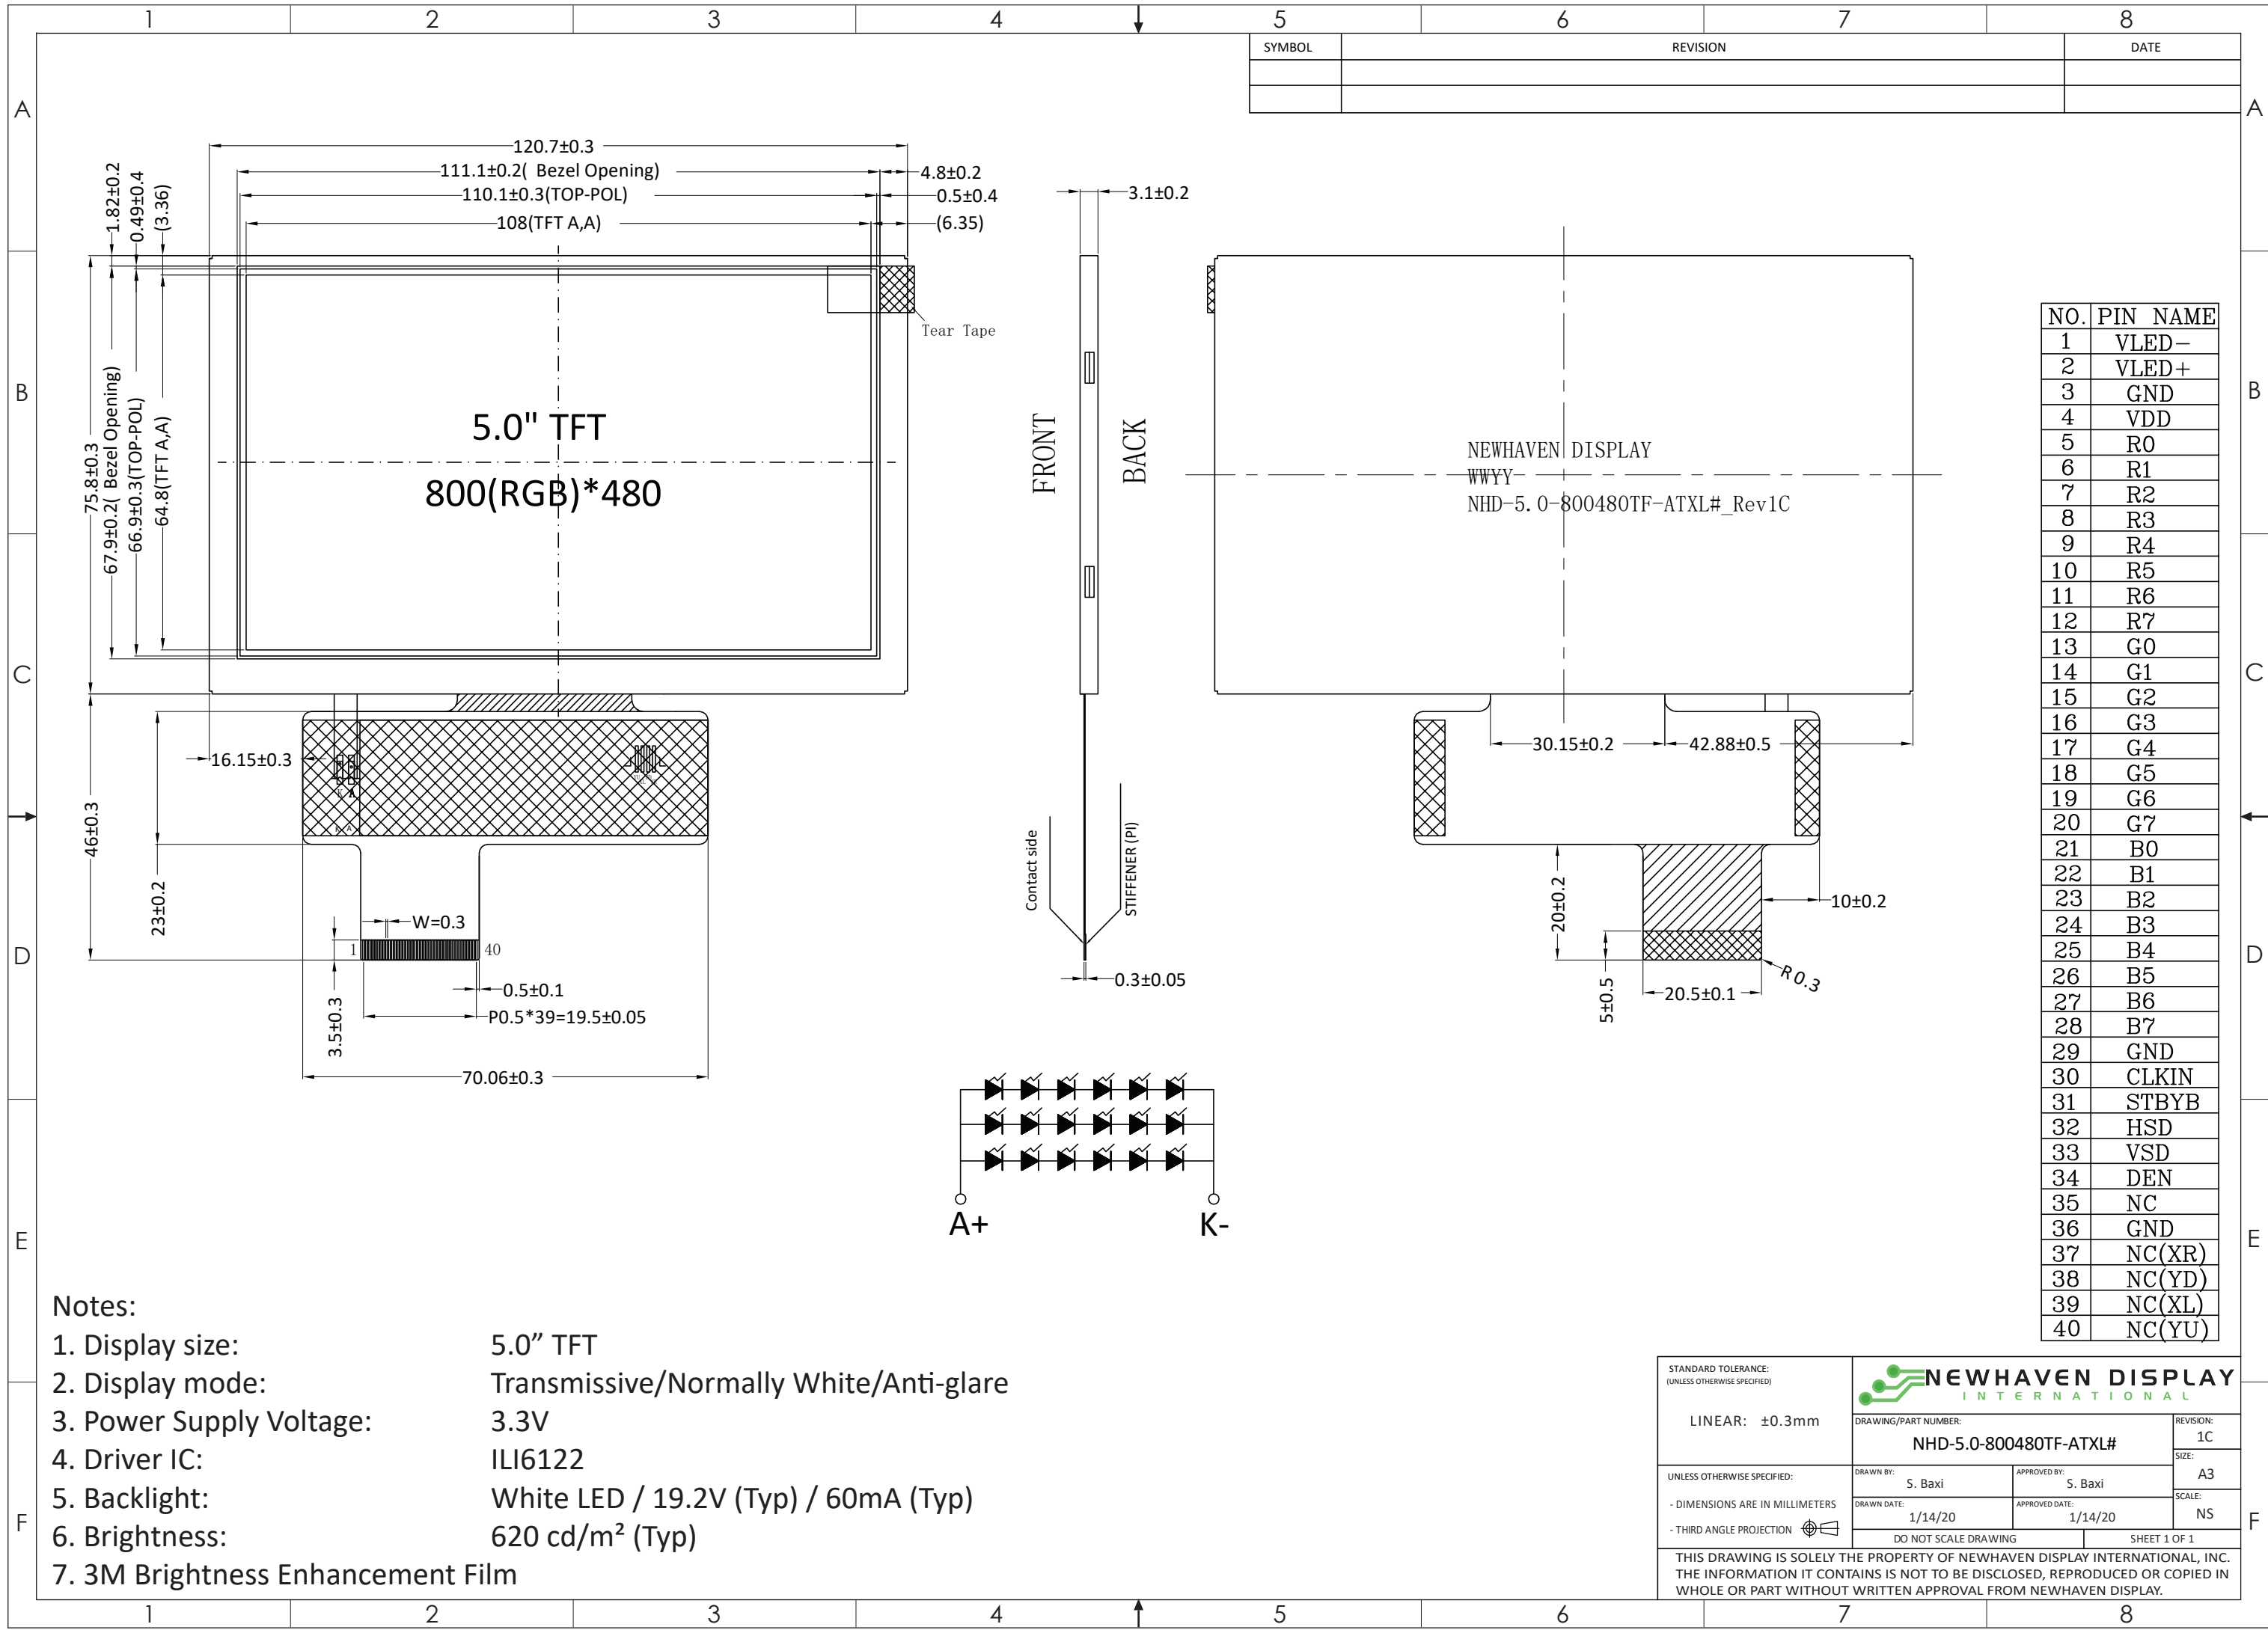- 800xRGBx480 resolution, up to 16.7M colors
- 18-LED backlight
- 24-bit RGB interface
- Enhanced Optical Characteristics
- Wide Viewing Angles



- Notes:
- | | |
|-----------------------------------|--|
| 1. Display size: | 5.0" TFT |
| 2. Display mode: | Transmissive/Normally White/Anti-glare |
| 3. Power Supply Voltage: | 3.3V |
| 4. Driver IC: | ILI6122 |
| 5. Backlight: | White LED / 19.2V (Typ) / 60mA (Typ) |
| 6. Brightness: | 620 cd/m ² (Typ) |
| 7. 3M Brightness Enhancement Film | |

| | | | |
|---|--|---|---------------------------|
| STANDARD TOLERANCE: (UNLESS OTHERWISE SPECIFIED) | |  | |
| LINEAR: ±0.3mm | | DRAWING/PART NUMBER: NHD-5.0-800480TF-ATXL# | REVISION: 1C |
| UNLESS OTHERWISE SPECIFIED: | | DRAWN BY: S. Baxi | APPROVED BY: S. Baxi |
| - DIMENSIONS ARE IN MILLIMETERS | | DRAWN DATE: 1/14/20 | APPROVED DATE: 1/14/20 |
| - THIRD ANGLE PROJECTION  | | DO NOT SCALE DRAWING | |
| THIS DRAWING IS SOLELY THE PROPERTY OF NEWHAVEN DISPLAY INTERNATIONAL, INC. THE INFORMATION IT CONTAINS IS NOT TO BE DISCLOSED, REPRODUCED OR COPIED IN WHOLE OR PART WITHOUT WRITTEN APPROVAL FROM NEWHAVEN DISPLAY. | | SHEET 1 OF 1 | |

Pin Description

| Pin No. | Symbol | External Connection | Function Description |
|---------|-----------------|---------------------|---|
| 1 | LED- | LED Power Supply | Ground for Backlight |
| 2 | LED+ | LED Power Supply | Backlight Power Supply (60mA @ 19.2V) |
| 3 | GND | Power Supply | Ground |
| 4 | V _{DD} | Power Supply | Power supply for LCD and logic (3.3V) |
| 5-12 | [R0-R7] | MPU | Red Data Signals |
| 13-20 | [G0-G7] | MPU | Green Data Signals |
| 21-28 | [B0-B7] | MPU | Blue Data Signals |
| 29 | GND | Power Supply | Ground |
| 30 | CLKIN | MPU | Clock for input data (Rising Edge) |
| 31 | STBYB | MPU | 1: Normal Operation; 0: Standby Mode |
| 32 | HSD | MPU | Line synchronization signal |
| 33 | VSD | MPU | Frame synchronization signal |
| 34 | DEN | MPU | Data Enable signal; Positive Polarity (Required in DE mode) |
| 35 | NC | - | No Connect |
| 36 | GND | Power Supply | Ground |
| 37 | XR | - | No Connect |
| 38 | YD | - | No Connect |
| 39 | XL | - | No Connect |
| 40 | YU | - | No Connect |

Recommended LCD connector: 0.5mm pitch 40-Conductor FFC. Molex p/n: 54104-4031 (top contact)

Backlight connector: on LCD connector

Mates with: ---

The ILI6122 driver IC is configured for DE Mode by default which eliminates the need to depend on HSD and VSD timing signals. Using DE mode in place of Sync mode, the display will no longer be affected by changes to the sync timing or porch settings in the event of a driver IC change. This will maintain a consistent display performance for any driver IC changes that may occur in the future.

The ILI6122 driver will treat the data on the Dx[7:0] RGB data bus as active display data while DEN is at “H” level and ignore the data on the Dx[7:0] RGB data bus while DEN is at “L” level.

Sync Mode can still be provided as the default setting but will need to be ordered as a custom option.

Electrical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------------|------------------|---|-----------------------|--------|-----------------------|------|
| Operating Temperature Range | T _{OP} | Absolute Max | -20 | - | +70 | °C |
| Storage Temperature Range | T _{ST} | Absolute Max | -30 | - | +80 | °C |
| Supply Voltage | V _{DD} | - | 3.0 | 3.3 | 3.6 | V |
| Supply Current | I _{DD} | V _{DD} = 3.3V | 39 | 78 | 117 | mA |
| "H" Level input | V _{IH} | - | 0.7 * V _{DD} | - | V _{DD} | V |
| "L" Level input | V _{IL} | - | GND | - | 0.3 * V _{DD} | V |
| "H" Level output | V _{OH} | - | V _{DD} - 0.4 | - | V _{DD} | V |
| "L" Level output | V _{OL} | - | GND | - | 0.4 | V |
| | | | | | | |
| Backlight Supply Current | I _{LED} | - | - | 60 | 75 | mA |
| Backlight Supply Voltage | V _{LED} | I _{LED} = 60mA T _{OP} = 25°C | 16.8 | 19.2 | 20.4 | V |
| Backlight Lifetime* | - | | - | 50,000 | - | Hrs. |

*Backlight lifetime is rated as Hours until **half-brightness**, under normal operating conditions. The LED of the backlight is driven by current drain; drive voltage is for reference only. Drive voltage must be selected to ensure backlight current drain is below MAX level stated.

Optical Characteristics:

| Item | | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------|---------------------------------|--------------------------|-------|-------|-------|-------------------|
| Optimal Viewing Angles | Top | φY+ | CR ≥ 10 | 60 | 70 | - | ° |
| | Bottom | φY- | | 60 | 70 | - | ° |
| | Left | θX- | | 60 | 70 | - | ° |
| | Right | θX+ | | 60 | 70 | - | ° |
| Contrast Ratio | | CR | - | 400 | 500 | - | - |
| Luminance | | L _V | I _{LED} = 60 mA | 500 | 620 | - | cd/m ² |
| Response Time | | T _R + T _F | T _{OP} = 25°C | - | 25 | 50 | ms |
| Chromaticity | Red | X _R | - | 0.513 | 0.563 | 0.613 | - |
| | | Y _R | - | 0.286 | 0.336 | 0.386 | - |
| | Green | X _G | - | 0.283 | 0.333 | 0.383 | - |
| | | Y _G | - | 0.557 | 0.607 | 0.657 | - |
| | Blue | X _B | - | 0.094 | 0.144 | 0.194 | - |
| | | Y _B | - | 0.047 | 0.097 | 0.147 | - |
| | White | X _W | - | 0.257 | 0.307 | 0.357 | - |
| | | Y _W | - | 0.300 | 0.350 | 0.400 | - |

Driver Information

Built-in ILI6122 Source Driver: <http://www.newhavendisplay.com/appnotes/datasheets/LCDs/ILI6122.pdf>

Built-in ILI5960D Gate Driver: <http://www.newhavendisplay.com/appnotes/datasheets/LCDs/ILI5960D.pdf>

Timing Characteristics


AC Characteristics

| Parameter | Symbol | Min | Typ | Max | Unit | Conditions |
|------------------------------------|------------------|-----|-----|-----|------|--|
| V _{DD} Power ON Slew Rate | T _{POR} | - | - | 20 | ms | From 0V to 90% V _{DD} |
| RSTB Pulse Width | T _{RST} | 10 | - | - | μs | CLKIN = 45MHz |
| CLKIN cycle time | T _{cph} | 20 | - | - | ns | |
| CLKIN pulse duty | T _{cwh} | 40 | 50 | 60 | % | |
| VSD setup time | T _{vst} | 8 | - | - | ns | |
| VSD hold time | T _{vhd} | 8 | - | - | ns | |
| HSD setup time | T _{hst} | 8 | - | - | ns | |
| HSD hold time | T _{hhd} | 8 | - | - | ns | |
| Data set-up time | T _{dsu} | 8 | - | - | ns | D0R[7:0], D1G[7:0], D2B[7:0] to CLKIN |
| Data hold time | T _{dhd} | 8 | - | - | ns | D0R[7:0], D1G[7:0], D2B[7:0] to CLKIN |
| DE setup time | T _{esu} | 8 | - | - | ns | |
| DE hold time | T _{ehd} | 8 | - | - | ns | |
| Output stable time | T _{sst} | - | - | 6 | μs | 10%-90% target voltage C _L = 120pf, R= 10kΩ |


Parallel 24-Bit RGB Mode Timing

| Parameter | Symbol | Min | Typ | Max | Unit | Conditions |
|--------------------------------|-------------------|-----|-----|-----|-------|-------------------------------|
| CLKIN Frequency | F _{clk} | - | 40 | 50 | MHz | V _{DD} = 2.7V ~ 3.6V |
| CLKIN time | T _{clk} | 20 | 25 | - | Ns | |
| CLKIN Pulse Duty | T _{cwh} | 40 | 50 | 60 | % | T _{clk} |
| Time from HSD to Source Output | T _{hso} | - | 20 | - | CLKIN | |
| Time from HSD to LD | T _{hld} | - | 20 | - | CLKIN | |
| Time from HSD to STV | T _{hstv} | - | 2 | - | CLKIN | |
| Time from HSD to CKV | T _{hckv} | - | 20 | - | CLKIN | |
| Time from HSD to OEV | T _{hoev} | - | 4 | - | CLKIN | |
| LD Pulse Width | T _{wld} | - | 10 | - | CLKIN | |
| CKV Pulse Width | T _{wckv} | - | 66 | - | CLKIN | |
| OEV Pulse Width | T _{woev} | - | 74 | - | CLKIN | |


Vertical Input Timing

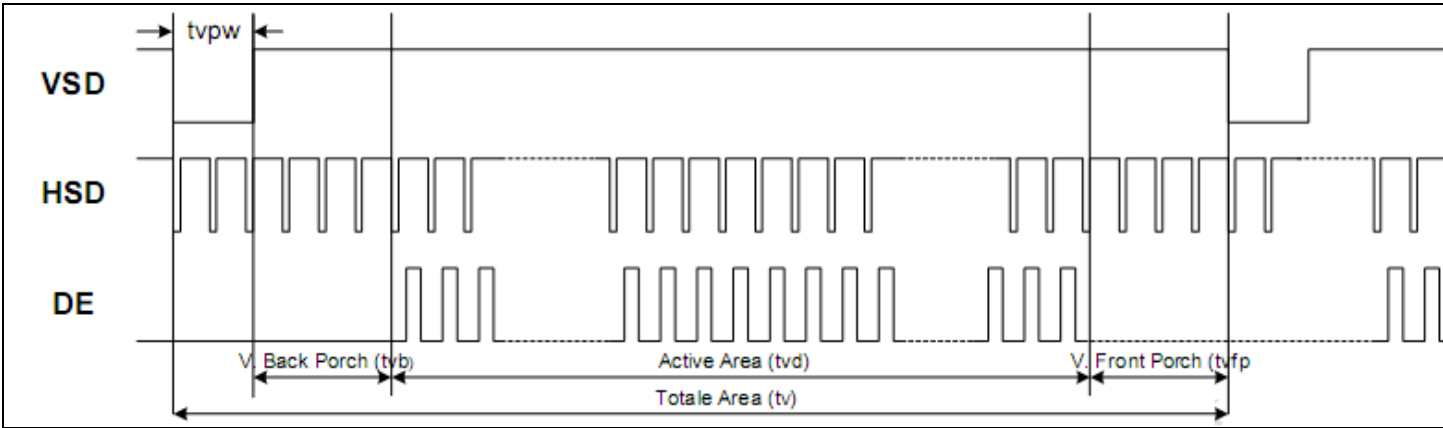


Horizontal Input Timing (DE Mode)

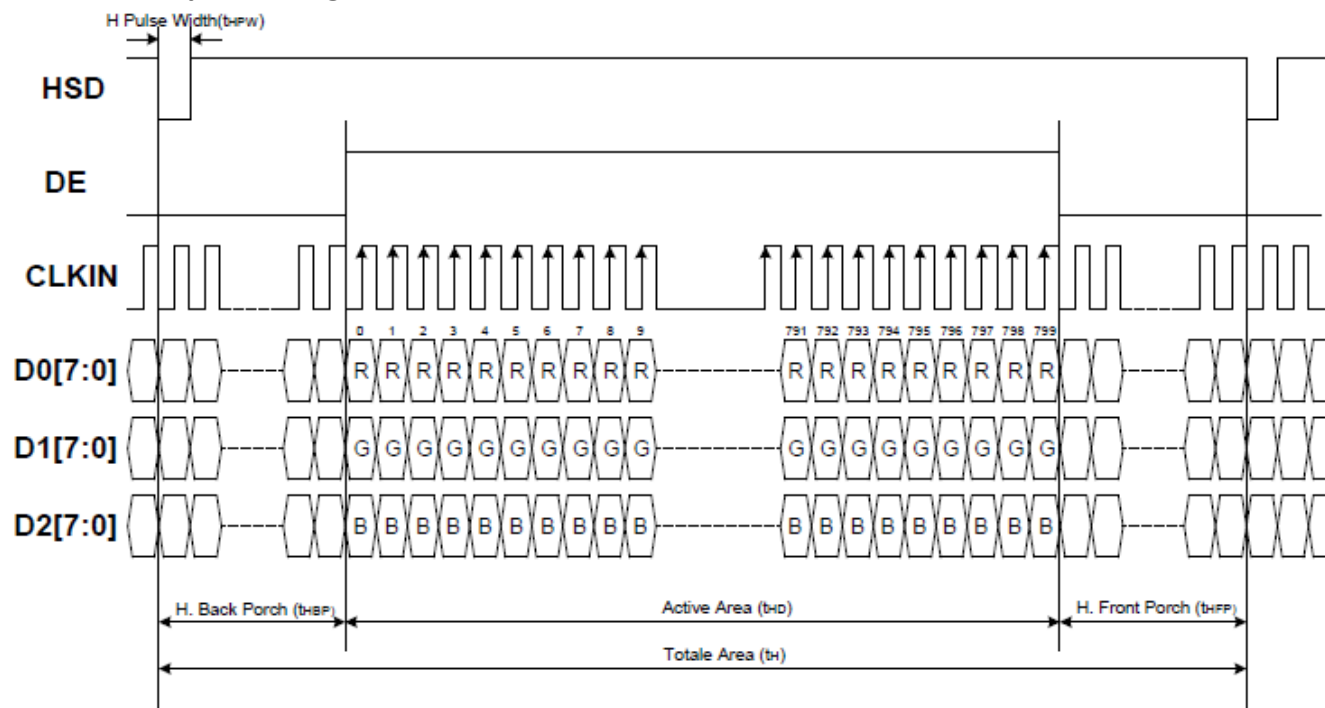


Input Clock and Data Timing

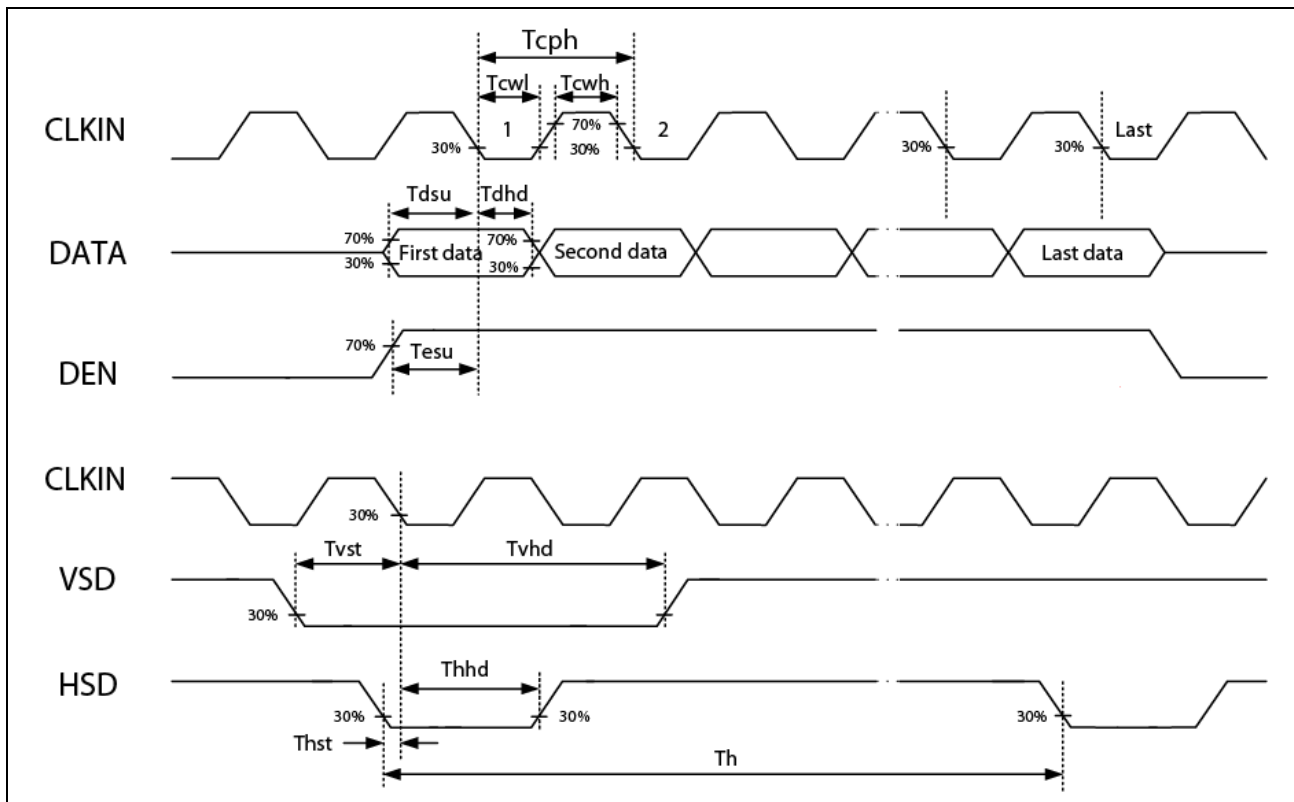


Source Output Timing

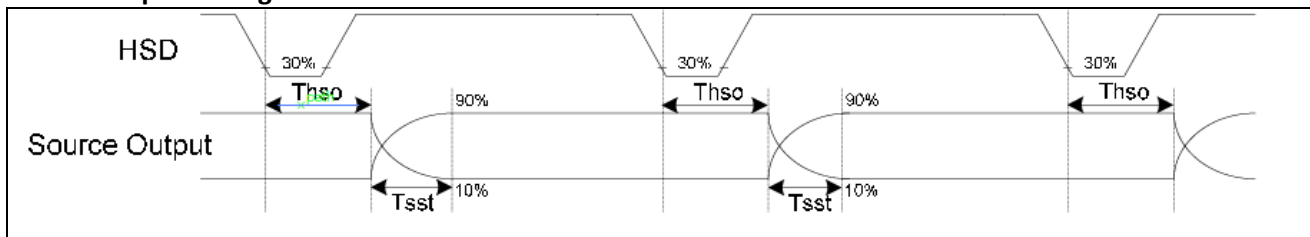

Power ON/OFF Sequence

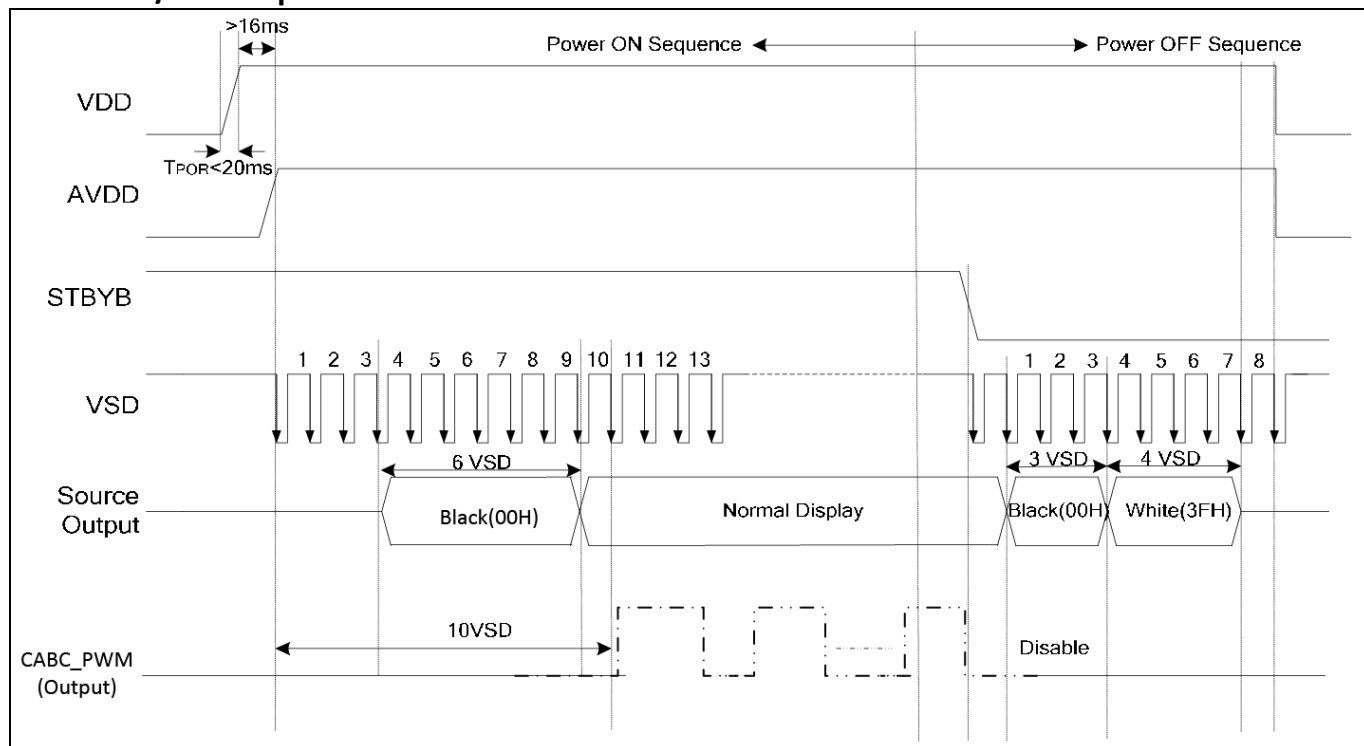

Enter/Exit Standby Mode Sequence

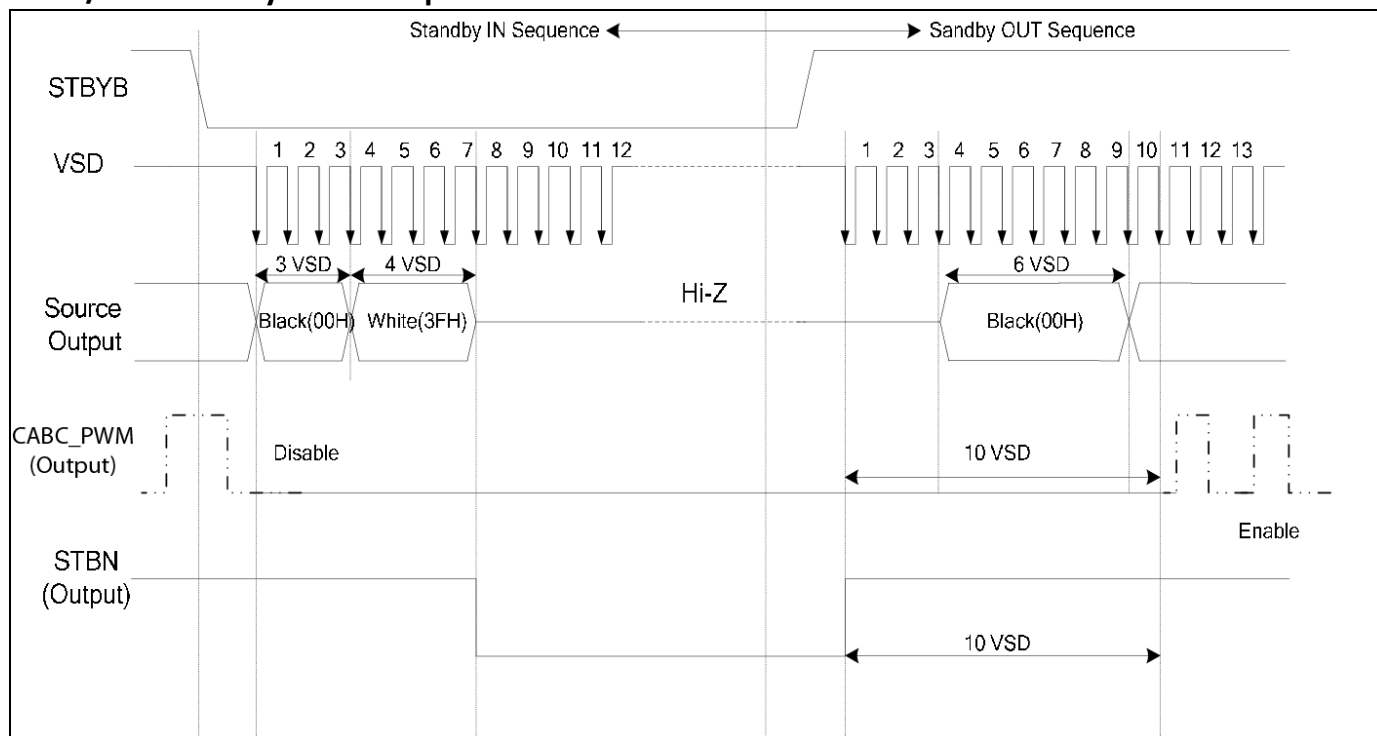

Quality Information

| Test Item | Content of Test | Test Condition | Note |
|---------------------------------------|---|--|------|
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | +80°C, 96 Hrs. | 2 |
| Low Temperature storage | Endurance test applying the low storage temperature for a long time. | -30°C, 96 Hrs. | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time. | +70°C, 96 Hrs. | 2 |
| Low Temperature Operation | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time. | -20°C, 96 Hrs. | 1,2 |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +50°C, 90% RH, 96 Hrs. | 1,2 |
| Thermal Shock resistance | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress. | -20°C, 60min -> 70°C, 60min = 1 Cycle for 20 cycles | |
| Vibration test | Endurance test applying vibration to simulate transportation and use. | 10-50Hz, 5G in each of 3 directions X, Y, Z For 30 minutes each direction | 3 |
| Static electricity test | Endurance test applying electric static discharge. | Air: 8kV, 150pF, 330Ω, 5 times Contact: 4kV, 150pF, 330Ω, 5 times | |

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisplay.com/specs/precautions.pdf

Warranty Information and Terms & Conditions

http://www.newhavendisplay.com/index.php?main_page=terms