


Quick Setup Guide

EdgeIPS Pro Bypass LAN Module

Support
configurable
hardware
bypass

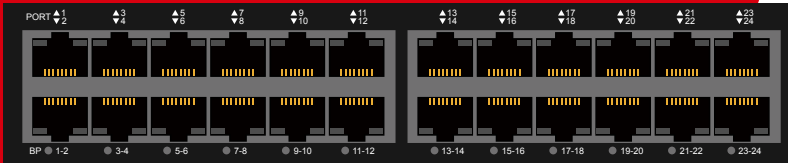

IPS Pro-Module-24C-GE-BP

Before Installing Module Cards

- Review the release notes of your product for any late-breaking changes to the installation instructions.
- Read and follow all safety information listed, and be certain to power off the device before you install or remove the bypass LAN modules.

 **NOTE:** The main parts of the EdgeIPS Pro 1048 and 2096 models do not support hot-swappable mechanisms.


ESD Requirements

Damage from Electrostatic Discharge (ESD) can occur when you handle electronic components improperly. Improper handling can also result in total or intermittent system failures. Use proper ESD protection whenever you handle equipment. Follow these general grounding guidelines:

- Review the release notes for your product for any late-breaking changes to the installation instructions.
- Avoid touching the circuit boards or connectors on all cards and modules.
- Avoid contact between printed circuit boards and clothing. The wrist strap only protects components from ESD voltage on the body. ESD voltage on clothing can still cause damage.
- Once you have removed a component board, place it side-up on an antistatic surface or in a static-shielding container that is also grounded to the same point as the device. If you plan to return the component to the factory, immediately place it in a static-shielding container.

Installing Bypass LAN Modules


Step 1. Make sure that the device is neither powered on nor connected to a power cord to prevent hardware failures or damages. Follow the slot insertion sequence as shown below when installing module cards.



⚠ Warning

To prevent hardware failures or damages, please ensure that the power cord is properly removed and not connected to any power source before you install or remove your LAN module cards.

1-1. EdgeIPS Pro 1048: Slot 1, Slot 2




1-2. EdgeIPS Pro 2096: Slot 1, Slot 2, Slot 3, Slot 4




Step 2. Remove the protective dampers that cover the empty slots from EdgeIPS Pro 1048 or 2096.

Step 3. Insert the LAN modules into empty module slots following the slot insertion sequence (slot 1, slot 2, slot 3, slot 4) and secure the modules with the slide locks.

3-1. EdgeIPS Pro 1048: Slot 1, Slot 2

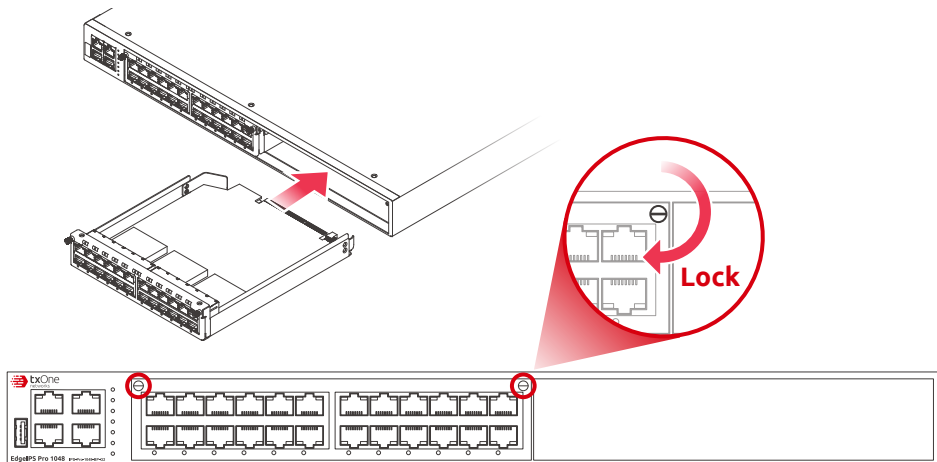


3-2. EdgeIPS Pro 2096: Slot 1, Slot 2, Slot 3, Slot 4

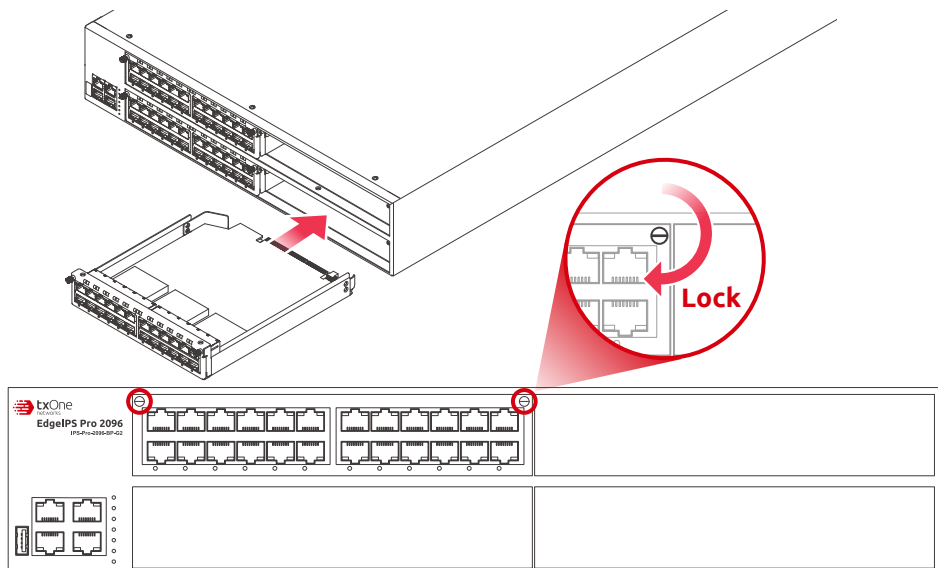

Step 4. Power on the device.

Removing Bypass LAN Modules


Step 1. Power off the device and remove its power cord to prevent hardware failures or damages. Power off the device and remove its power cord.




⚠ Warning

To prevent hardware failures or damages, please ensure that the power cord is properly removed and not connected to any power source before you install or remove your LAN module cards.

Step 2. After you power off the device and remove its power cord, release the slide locks and remove the unwanted LAN modules.

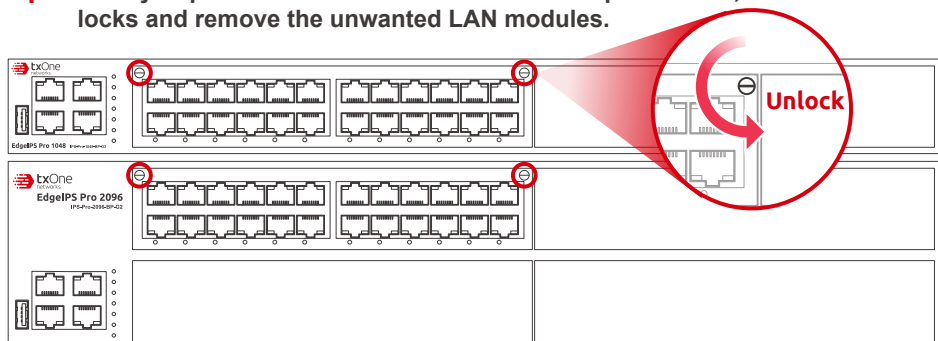

EdgeIPS Pro 1048

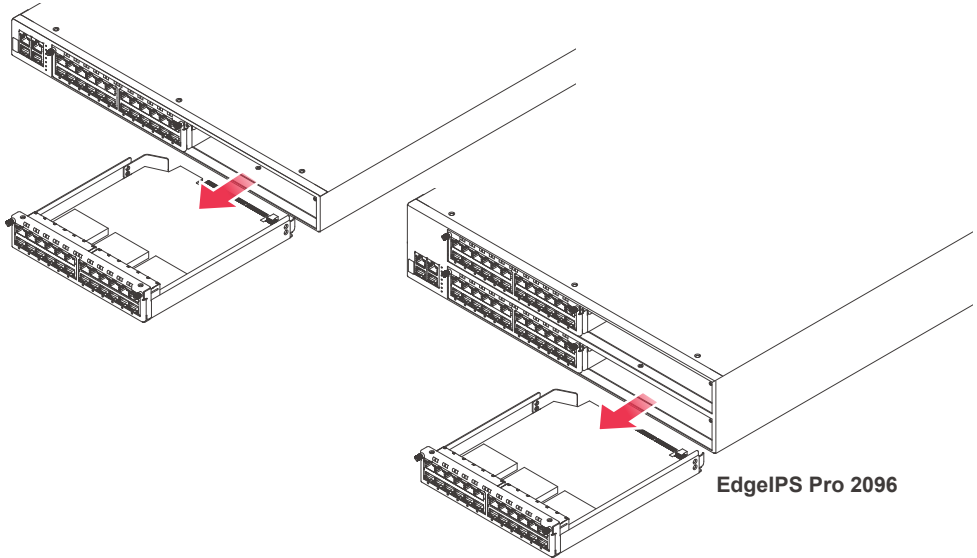

Step 3. Insert the protective dampers into empty slots to protect against dust accumulation and electrostatic discharge.

Other Resources

Website

<https://www.txone.com/>

MyTXOne Portal

<https://my.txone.com/>

List of Worldwide Offices and Phone Numbers

<https://www.txone.com/contact/>

Technical Support

E-mail: support@txone.com

EULA

<https://www.txone.com/legal/license-agreements/>



EdgeIPS Pro Landing Page