




Main Chip

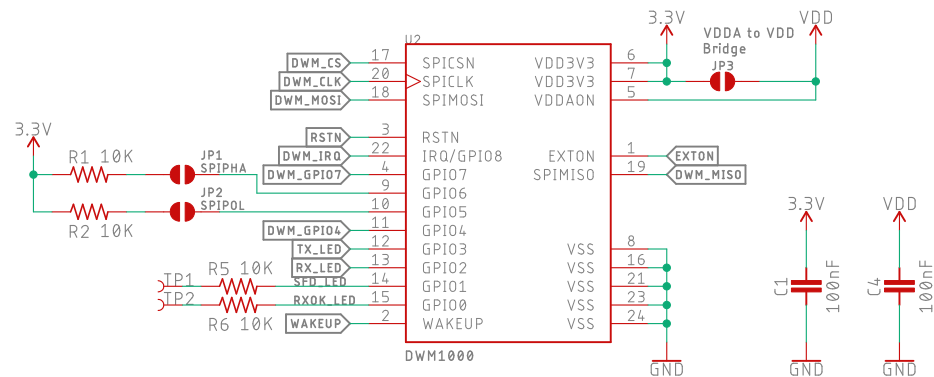


LED Indicators



Logic Level Converter

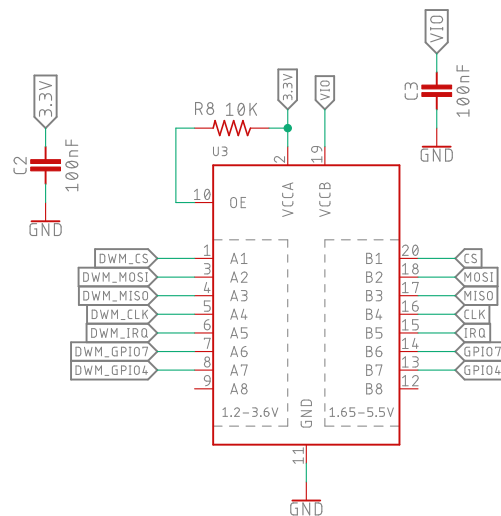

Headers

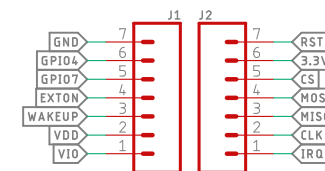

VIO is working voltage of your MCU
commonly Arduino will need 5V
ESP8266/ESP32 will need 3.3V

3.3V is power source for this module



GERAI CERDAS INTERNASIONAL

www.geraicerdas.com

DWM1000 Breakout Board

>VERSION V1.0

Modified by : Insan Sains

Last Modified : Jun 2020

Sheet: 1/1