

# Gerardo Andrés Mazzei Capote

45 N. Randall Ave, Apt. 109 • Madison, WI- 53715

(608) 622-4643 • mazzeicapote@wisc.edu

[linkedin.com/in/gerardo-mazzei-capote](https://www.linkedin.com/in/gerardo-mazzei-capote)

---

## PORTFOLIO

Fused Filament Fabrication (FFF), also known as Fused Deposition Modeling (FDM), is arguably the most widely available Additive Manufacturing (AM) technology at the moment. Offering the possibility of producing complex geometries in a compressed product development cycle and in a plethora of materials, it comes as no surprise that FFF is attractive to multiple industries, including the automotive and aerospace segments. However, the high anisotropy of parts developed through this technique imply that part failure prediction is extremely difficult—a requirement that must be satisfied to guarantee the safety of the final user. This pain point represents one of the major factors currently hindering the adoption of FFF and other AM technologies as legitimate manufacturing techniques, given that the safety of the final product is hard to guarantee since the failure behavior of the object is difficult to assess. The research I have conducted during my graduate studies is aimed at solving this issue by estimating the likelihood of part failure through a mathematical model, known as a Failure Criterion (FC), that allows engineers to safely assess if a given FFF part will hold its structural integrity considering its intended application. Calculation of the FC parameters requires destructive testing of coupons, produced with a variety of orientations of the deposited polymer strands during printing, traditionally referred to in literature as the bead orientation.

The lack of standardization in the field of AM posed a challenge: it was a necessity to develop customized specimen geometries, mechanical testing protocols, as well as the extrusion of a customized FFF filament produced with tight geometrical constraints and controlled production parameters that ensured that fluctuations in the material dimensions and quality would not introduce lurking variables into the experiments. Additionally, some of the required bead orientations necessary to fully describe the failure function were unattainable through the use of a traditional FFF printer, requiring the deployment of custom toolpath solutions using a unique 6-axis 3D printer developed in the Polymer Engineering Center at the University of Wisconsin-Madison.



Figure 1: 6-axis printer mid-print.

The resulting failure model has been proven to be capable of accurately capturing the failure behavior of FFF parts, as shown by experimental work where the predicted catastrophic failure stress of an FFF part tested in tension was within 10% of the real failure stress. This has in turn allowed the FC and the methodology derived within this research project to be used to predict part failure in other AM techniques, such as Selective Laser Sintering (SLS) and Multi-Jet Fusion (MJF). Future research is aimed at streamlin-

ing the process through machine learning algorithms and minimization of the required mechanical tests necessary to populate the FC function.

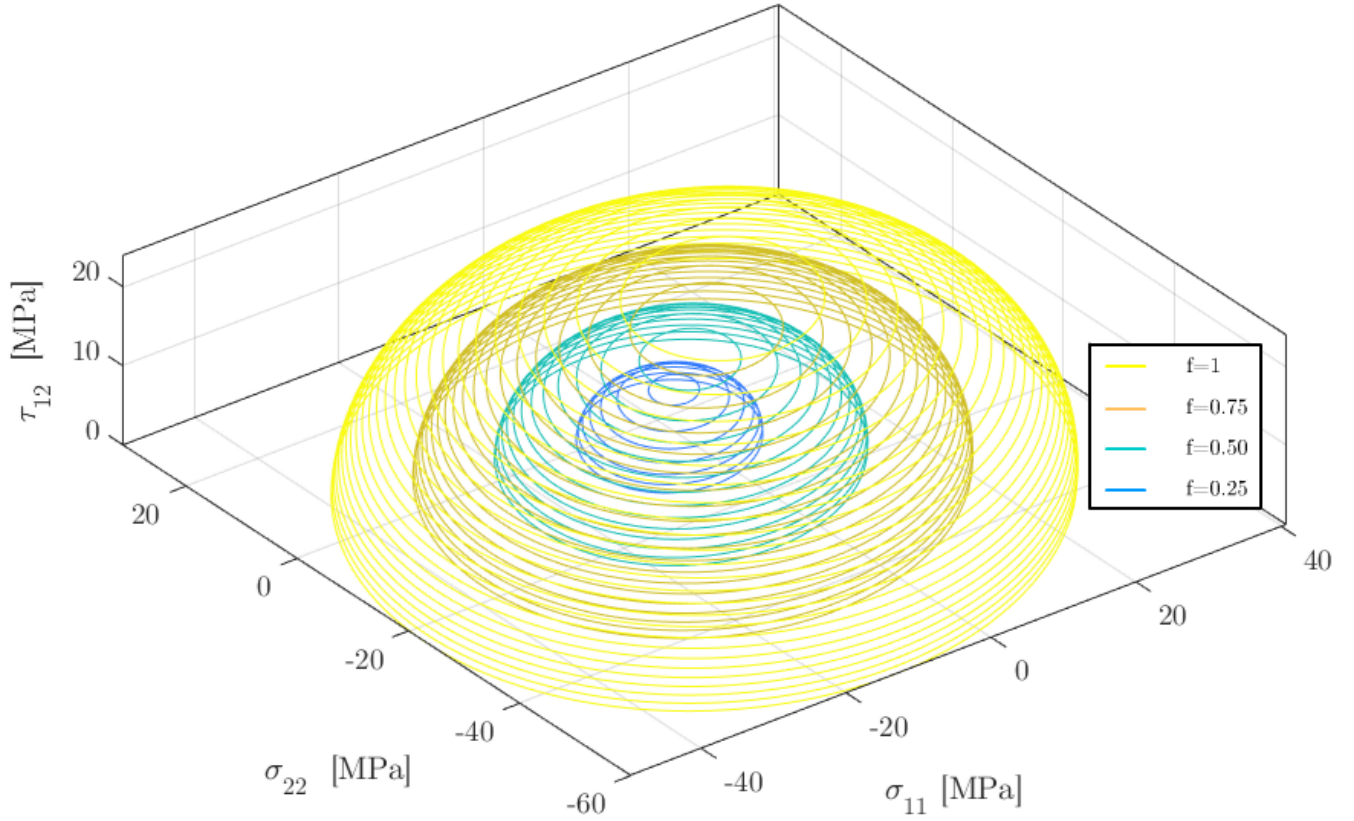


Figure 2: Complete Failure Surface plotted with calculated  $f$  values of 1, 0.75, 0.50 and 0.25 to illustrate safety factors of 1, 4/3, 2 and 4 respectively.

This research project has led to three peer reviewed publications, three technical presentations in important AM conferences (SFF, RAPID, AMUG), and international collaborations with renowned institutes such as the Technical University of Munich (TUM), the National School of Engineers of Saint-Étienne (ENISE), as well as contributions with industry partners such as BMW and Netzsch.

Additional research venues pursued during my graduate studies included the following short term projects:

1. Development and construction of a low-cost, reusable N9X mask during the COVID19 pandemic. Effort awarded with financial support from the Wisconsin Alumni Research Foundation (WARF).
2. Extrusion of a Polyethylene Terephthalate (PET) FFF filament produced using discarded bottles as the parent material.
3. Fabrication of Heat Exchanger units (HX) manufactured through polymer AM techniques.