

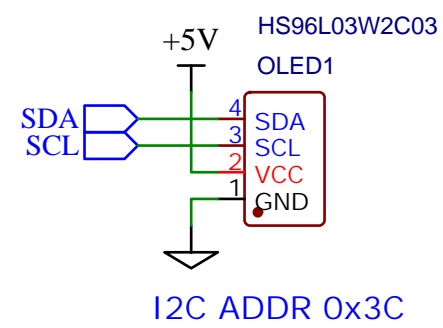

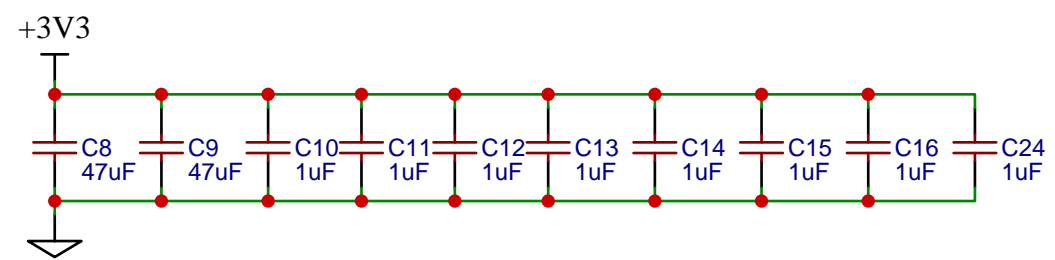
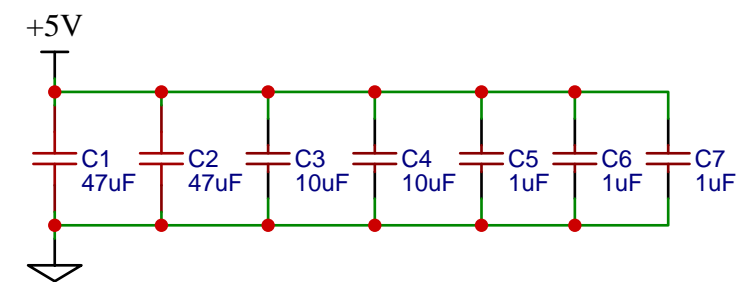


I2C MAP

0x2C : DIGITAL POT
0x3C : OLED SCREEN
0x40 : LED CONTROLLER

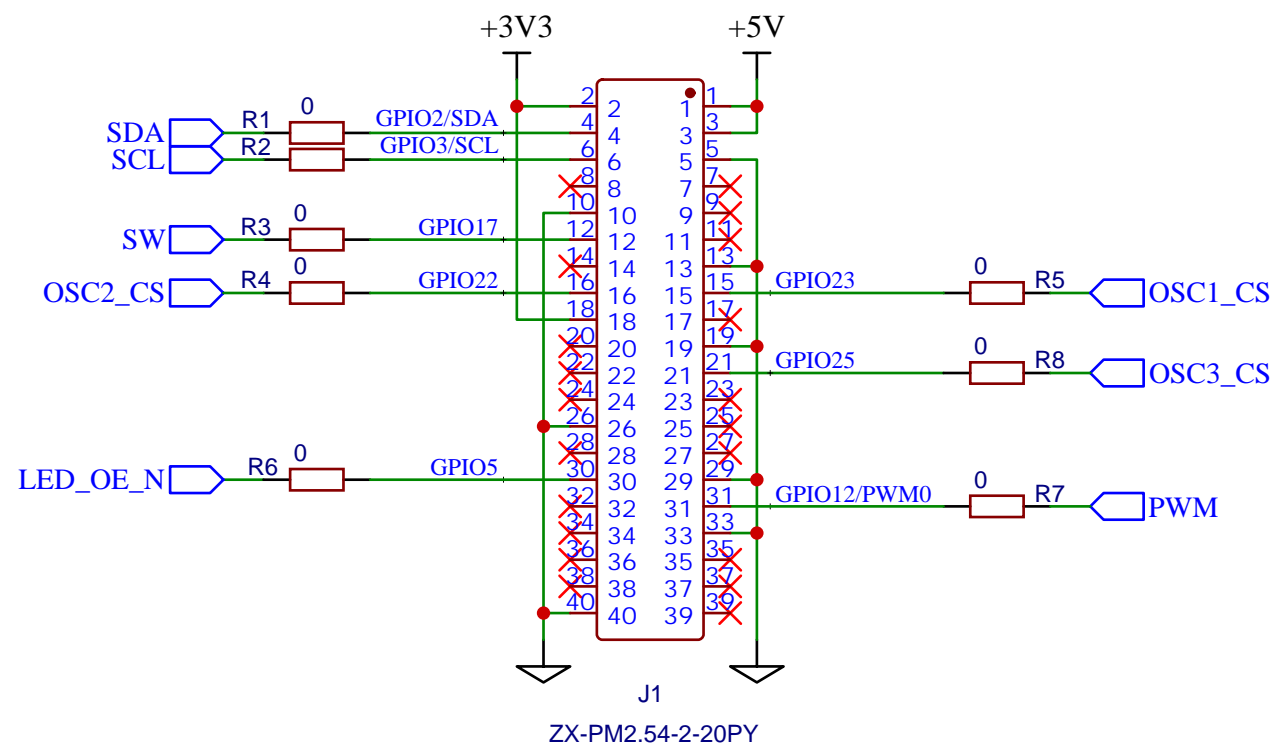

TITLE: h0t_d0g Raspberry Pi 3B+ Shield		REV: 1.0
EasyEDA	Company: Giannoulis Electronics	Sheet: 1/5
	Date: 2024-02-24	Drawn By: G. Giannoulis

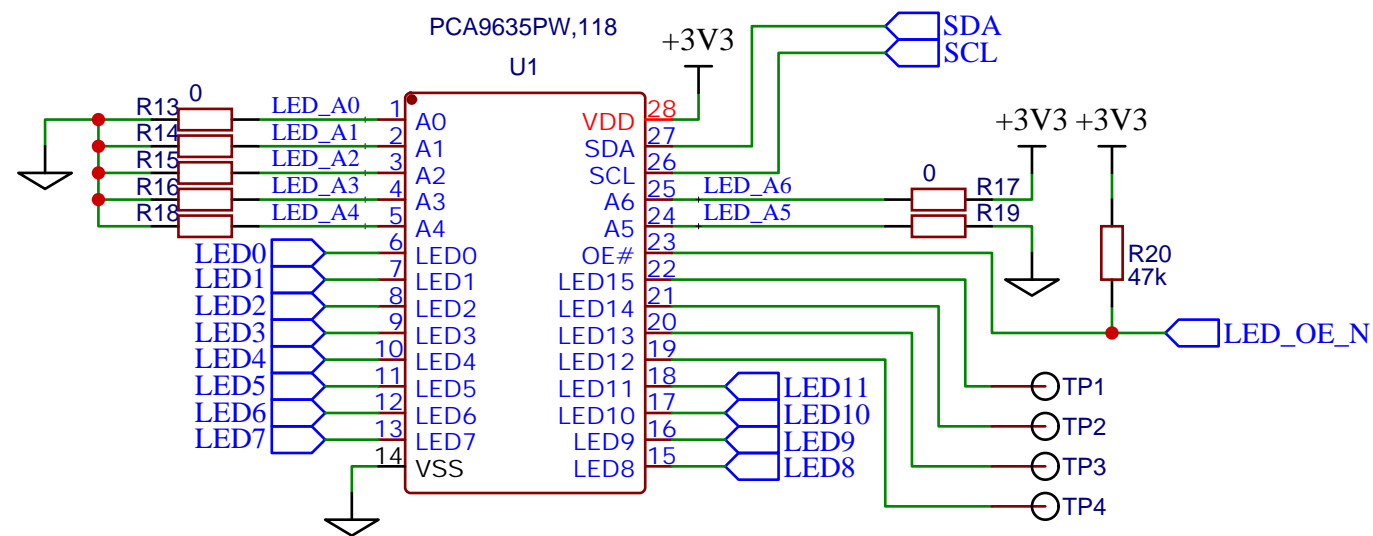

CURRENT CONFIG = I2C ADDR 0x40


THE FOLLOWING ADDRs CANNOT BE USED








0x00

0x03-0x07

0x70

0x78-0x7F

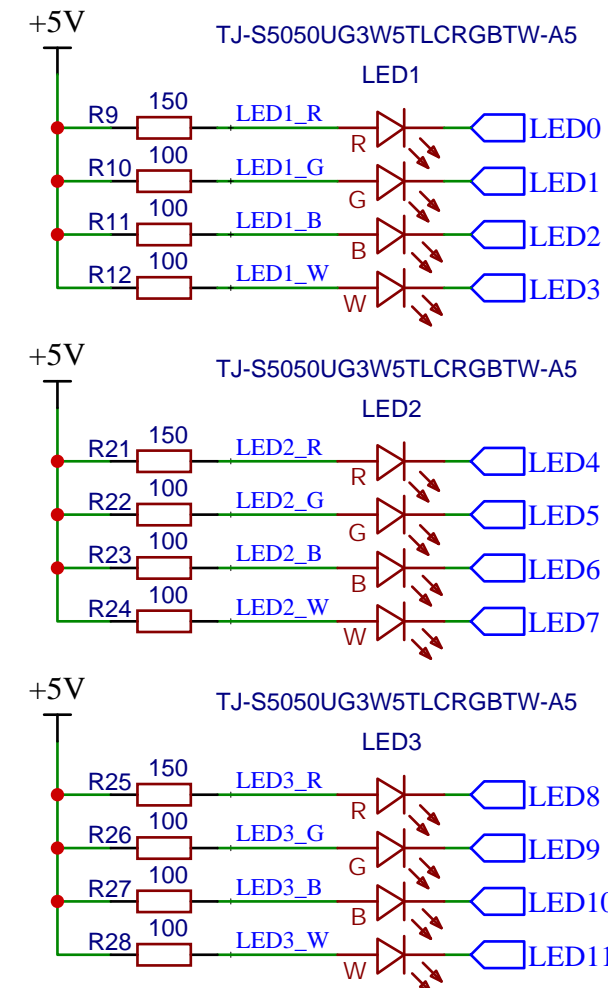

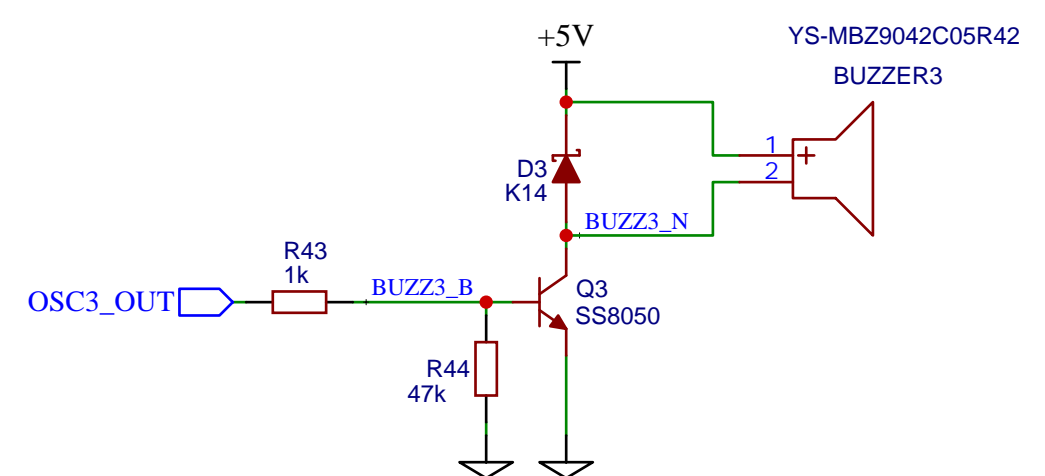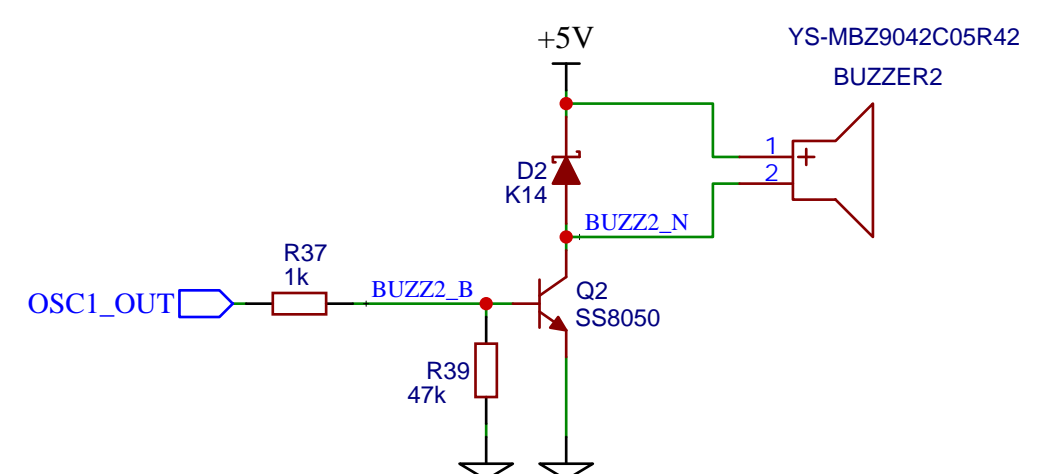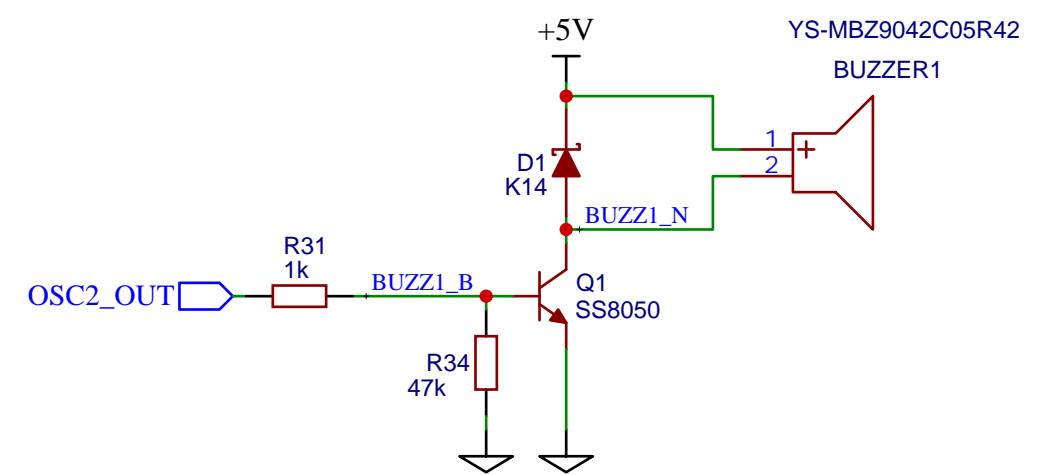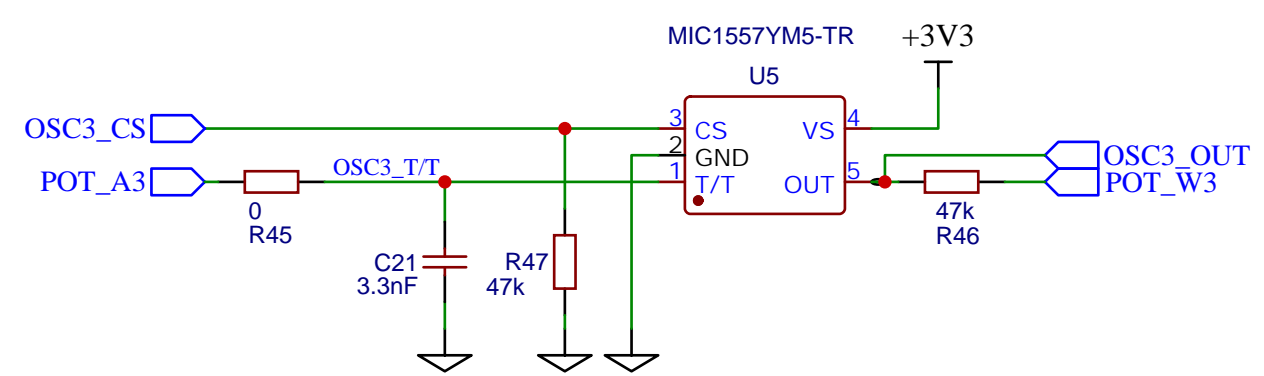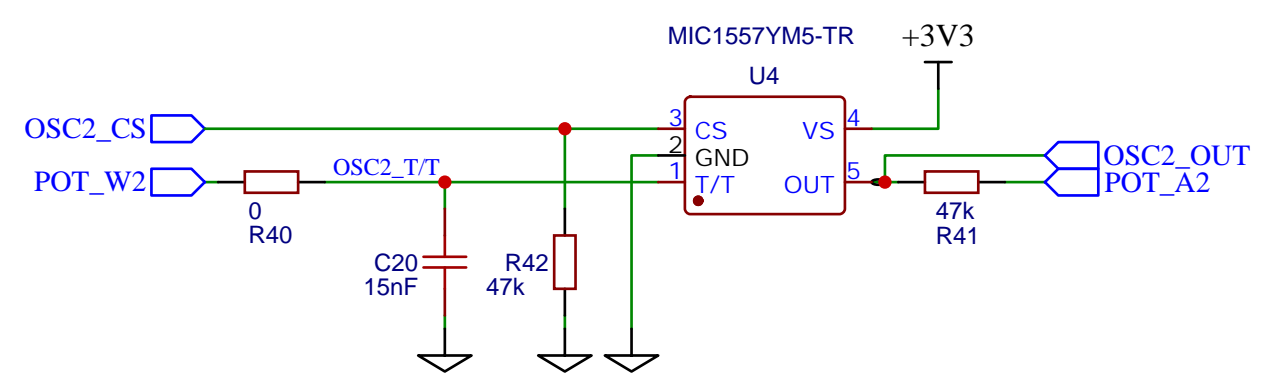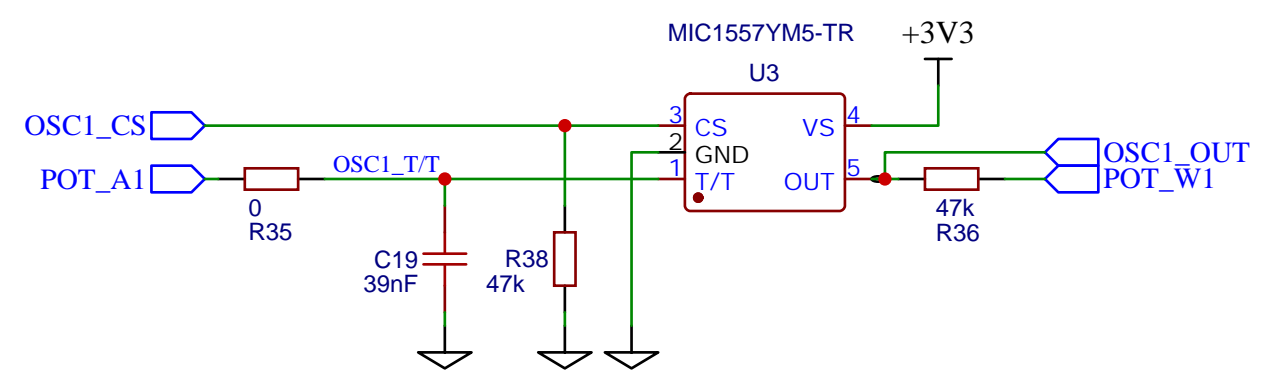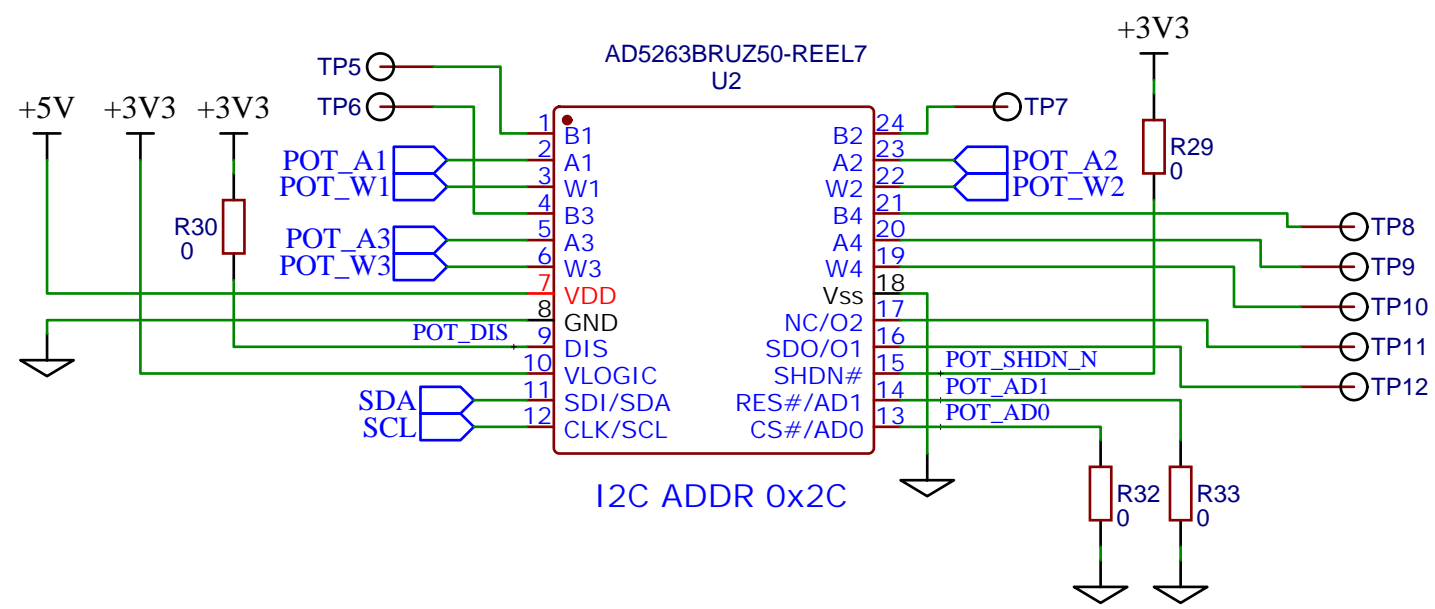

TITLE: h0t_d0g Raspberry Pi 3B+ Shield		REV: 1.0
EasyEDA	Company: Giannoulis Electronics	Sheet: 3/5
	Date: 2024-02-24	Drawn By: G. Giannoulis

