


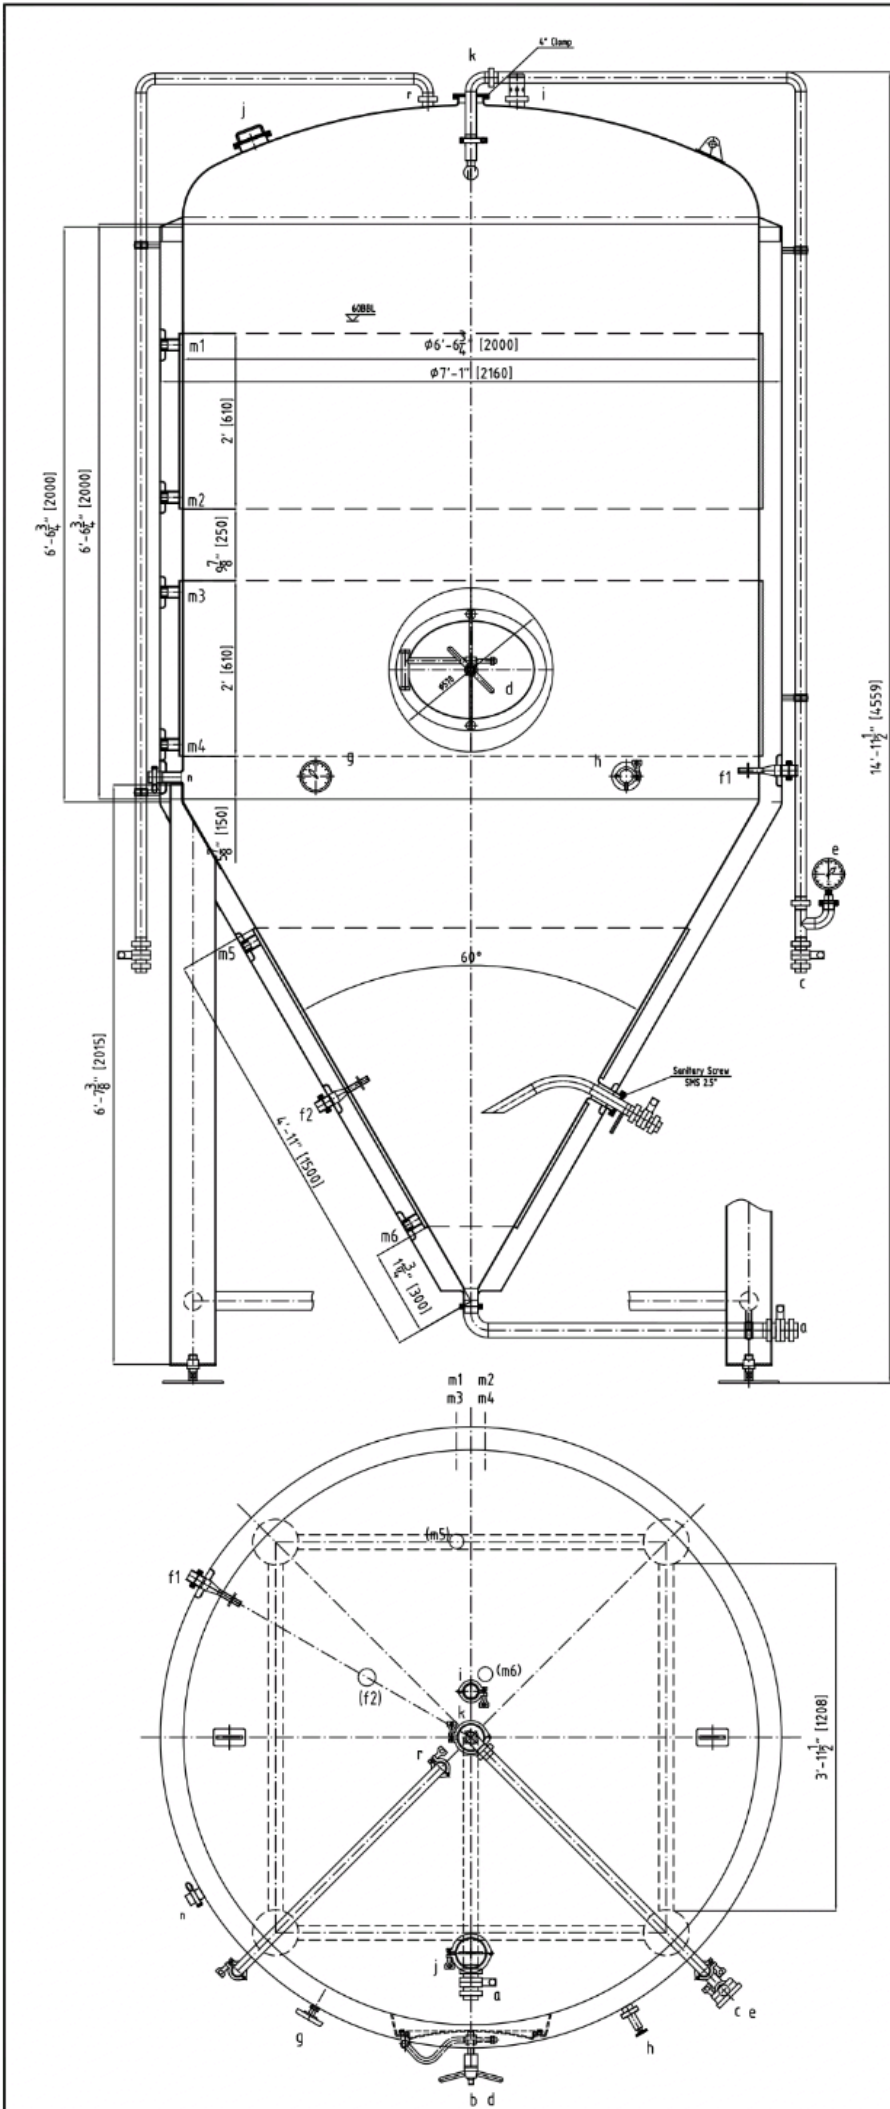

(Design Data Sheet)			
(Design parameters)			
(Container class)		(Pressure)	
(Parameter Name)		(Container)	(Jacket)
(Working pressure)	MPa	0.2	0.3
(Design pressure)	MPa	0.2	0.4
(Working Temperature)	℃	-5~40℃	
(Design Temperature)	℃	-5~40℃	
(Medium)		(Beer)	(Cooling)
(Material)		304	304
(Full volume)	BBL	76.447	
(Effective volume)	BBL	60	
(Maximum filling ratio)		78.5%	
(Safety valve A1 pressure)	MPa	0.2	
(Weight)	Kg		
(Insulation material)		(PU)	
(Insulation thickness)	mm	80	
(Pressure test)	MPa	0.2	0.6
(Air-tightness test)	MPa		

1. Shell welds shall be parallel to the inner wall, with double-sided welding shall be smooth, not having concave and convex edges and scratch, all interfaces with the inner cylinder welding arc light repair processing.

2. Head and polishing the surface, the inner cylinder body and the inner surface of cone 2B, cylinder and cone fore skin surface adopts mechanical drawing polishing processing. The inner surface of the cylinder body pickling and passivating treatment.

3. After the completion of the manufacture, equipment to 0.2MPa hydrostatic test, the inside of the jacket to the 0.6MPa hydraulic pressure test, pressure 30min, equipment is not lying testing water pressure test.

(CONNECTIONS)				
MARK	SIZE	DESCRIPTION	CONNECT SIZE	REMARKS
a	2"	(Yeast outlet)	φ50.8X15	(Clamp)
b	15"	(Beer outlet)	φ38.1X15	(Clamp)
c	15"	(CIP inlet)	φ38.1X15	(Clamp)
d	580X480	(Manway)	580X480X133	(Weld)
e	15"	(Pressure gauge)	φ38.1X15	(Clamp)
f1-2	15"	(Thermowell)	φ38.1X15	(Clamp)
g	15"	(Thermometer)	φ38.1X15	(Clamp)
h	15"	(Sample cock)	φ38.1X15	(Clamp)
i	2"	(PVRV)	φ50.8X15	(Clamp)
j	4"	(hop port)	φ101.6X2	(Clamp)
k	4"	(Connection port)	φ101.6X2	(Clamp)
m1-6	1"	(Coolant inlet/outlet)	NPT 1"	(Thread)
r	15"	(CO2 collect)	φ38.1X15	(Clamp)
n	15"	(Carb Stone)	φ38.1X15	Clamp

				AISI 304			
						Fermentation-60BBL	
Design		Standard		Phase marker	Weight	Properties	
Drawing		Examine			1289kg	11	
Examine		Approval					FV-60BBL
Technology		Date					