


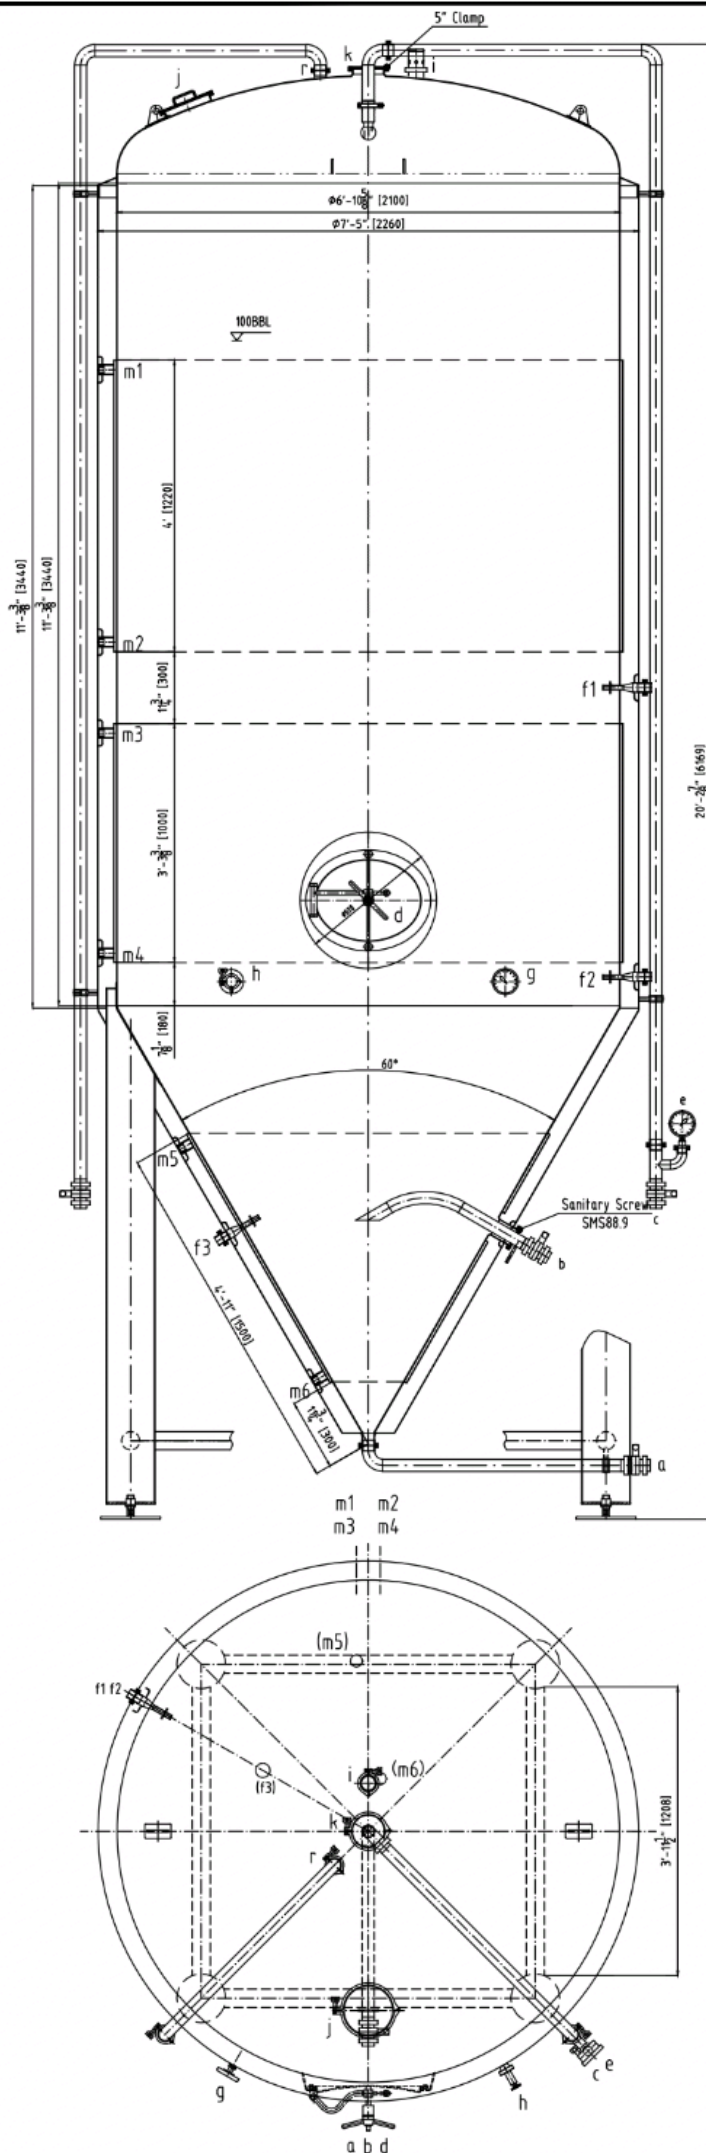

(Design Data Sheet)

(Design parameters)

(Container class)		(Pressure)	
(Parameter Name)		(Container)	(Jacket)
(Working pressure)	MPa	0.2	0.3
(Design pressure)	MPa	0.2	0.4
(Working Temperature)	℃	-5~40℃	
(Design Temperature)	℃	-5~40℃	
(Medium)		(Beer)	(COOLING)
(Material)		304	304
(Full volume)	BBL	118.47	
(Effective volume)	BBL	100	
(Maximum filling ratio)		77.8%	
(Safety valve A(t pressure)	MPa	0.2	
(Weight)	Kg		
(Insulation material)		(PU)	
(Insulation thickness)	mm	80	
(Pressure test)	MPa	0.2	0.5
(Air-tightness test)	MPa		

1. Shell welds shall be parallel to the inner wall, with double-sided welding shall be smooth, not having concave and convex edges and scratch, all interfaces with the inner cylinder welding arc light repair processing.
2. Head and polishing the surface, the inner cylinder body and the inner surface of cone 2B, cylinder and cone foreskin surface adopts mechanical drawing polishing processing.The inner surface of the cylinder body pickling and passivating treatment.
3. After the completion of the manufacture, equipment to 0.2MPa hydrostatic test, the inside of the jacket to the 0.5MPa hydraulic pressure test, pressure 30min, equipment is not lying testing water pressure test.

(CONNECTIONS)

MARK	SIZE	DESCRIPTION	CONNECT SIZE	REMARKS
a	2"	(Yeast outlet)	φ50.8X1.5	(Clamp)
b	2"	(Beer outlet)	φ50.8X1.5	(Clamp)
c	2"	(CIP inlet)	φ50.8X1.5	(Clamp)
d	580X480	(Manway)	580X480X133	(Weld)
e	1.5"	(Pressure gauge)	φ38.1X1.5	(Clamp)
f1-3	1.5"	(Thermowell)	φ38.1X1.5	(Clamp)
g	1.5"	(Thermometer)	φ38.1X1.5	(Clamp)
h	1.5"	(Sample cock)	φ38.1X1.5	(Clamp)
i	2.5"	(PVRV)	φ63.5X2	(Clamp)
j	8"	(hop port)	φ203.2X2	(Clamp)
k	5"	(Conection port)	φ133X2	(Clamp)
m1-6	1"	(Coolant inlet/outlet)	NPT1"	(Thread)
r	2"	(CO2 inlet)	φ50.8X1.5	(Clamp)

				AISI 304			
Design		Standard		Phase marker	Weight	Properity	Fermentation-100BBL
Drafting		Examine			1830kg	11	
Examine		Approval					FV-100BBL
Technology		Date					