


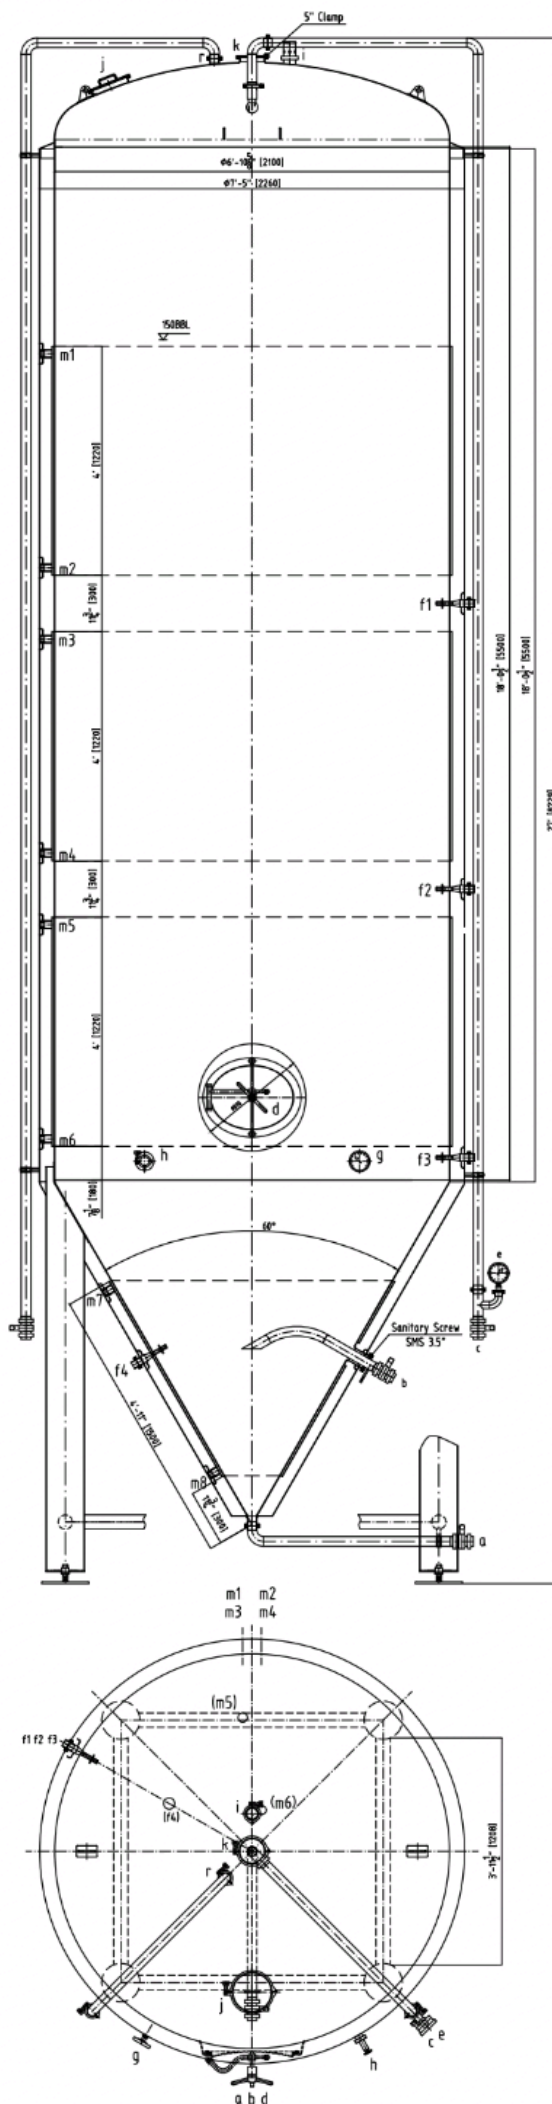

(Design Data Sheet)

(Design parameters)

(Container class)		(Pressure)	
(Parameter Name)		(Container)	(Jacket)
(Working pressure)	MPa	0.2	0.3
(Design pressure)	MPa	0.2	0.4
(Working Temperature)	°C	-5~40°C	
(Design Temperature)	°C	-5~40°C	
(Medium)		(Beer)	(COOLING)
(Material)		304	304
(Full volume)	BBL	189.297	
(Effective volume)	BBL	150	
(Maximum filling ratio)		79.2%	
(Safety valve ACI pressure)	MPa	0.2	
(Weight)	Kg		
(Insulation material)		(PU)	
(Insulation thickness)	mm	80	
(Pressure test)	MPa	0.2	0.5
(Air-tightness test)	MPa		

1. Shell welds shall be parallel to the inner wall, with double-sided welding shall be smooth, not having concave and convex edges and scratch, all interfaces with the inner cylinder welding arc light repair processing.
2. Head and polishing the surface, the inner cylinder body and the inner surface of cone 2B, cylinder and cone fore skin surface adopts mechanical drawing polishing processing. The inner surface of the cylinder body pickling and passivating treatment.
3. After the completion of the manufacture, equipment to 0.2MPa hydrostatic test, the inside of the jacket to the 0.5MPa hydraulic pressure test, pressure 30min, equipment is not lying testing water pressure test.

(CONNECTIONS)

MARK	SIZE	DESCRIPTION	CONNECT SIZE	REMARKS
a	2"	(Yeast outlet)	Ø50.8X15	(Clamp)
b	2"	(Beer outlet)	Ø50.8X15	(Clamp)
c	2"	(CIP inlet)	Ø50.8X15	(Clamp)
d	580X480	(Manway)	580X480X133	(Weld)
e	15"	(Pressure gauge)	Ø38.1X15	(Clamp)
f1-3	15"	(Thermowell)	Ø38.1X15	(Clamp)
g	15"	(Thermometer)	Ø38.1X15	(Clamp)
h	15"	(Sample cock)	Ø38.1X15	(Clamp)
i	2.5"	(PVRV)	Ø63.5X2	(Clamp)
j	8"	(hop port)	Ø203.2X2	(Clamp)
k	5"	(Connection port)	Ø133X2	(Clamp)
m1-6	1"	(Coolant inlet/outlet)	NPT1"	(Thread)
r	2"	(CO2 inlet)	Ø50.8X15	(Clamp)

				AISI 304			
						Fermentation-150BBL	
Design		Standard		Phase marker	Weight	Proportion	
Drafting		Examine			2500kg	1:1	
Examine		Approval					FV-150BBL
Technology		Date					