

batmonitor 0.74-py - decision flow 1 / 6: D1 - Sofar first, S3 source of the discharge, winter heat pump rule


from c/bm_tables.h: each table is asked row by row, top to bottom; the first row that matches decides (yes -> its result, no -> the next row)

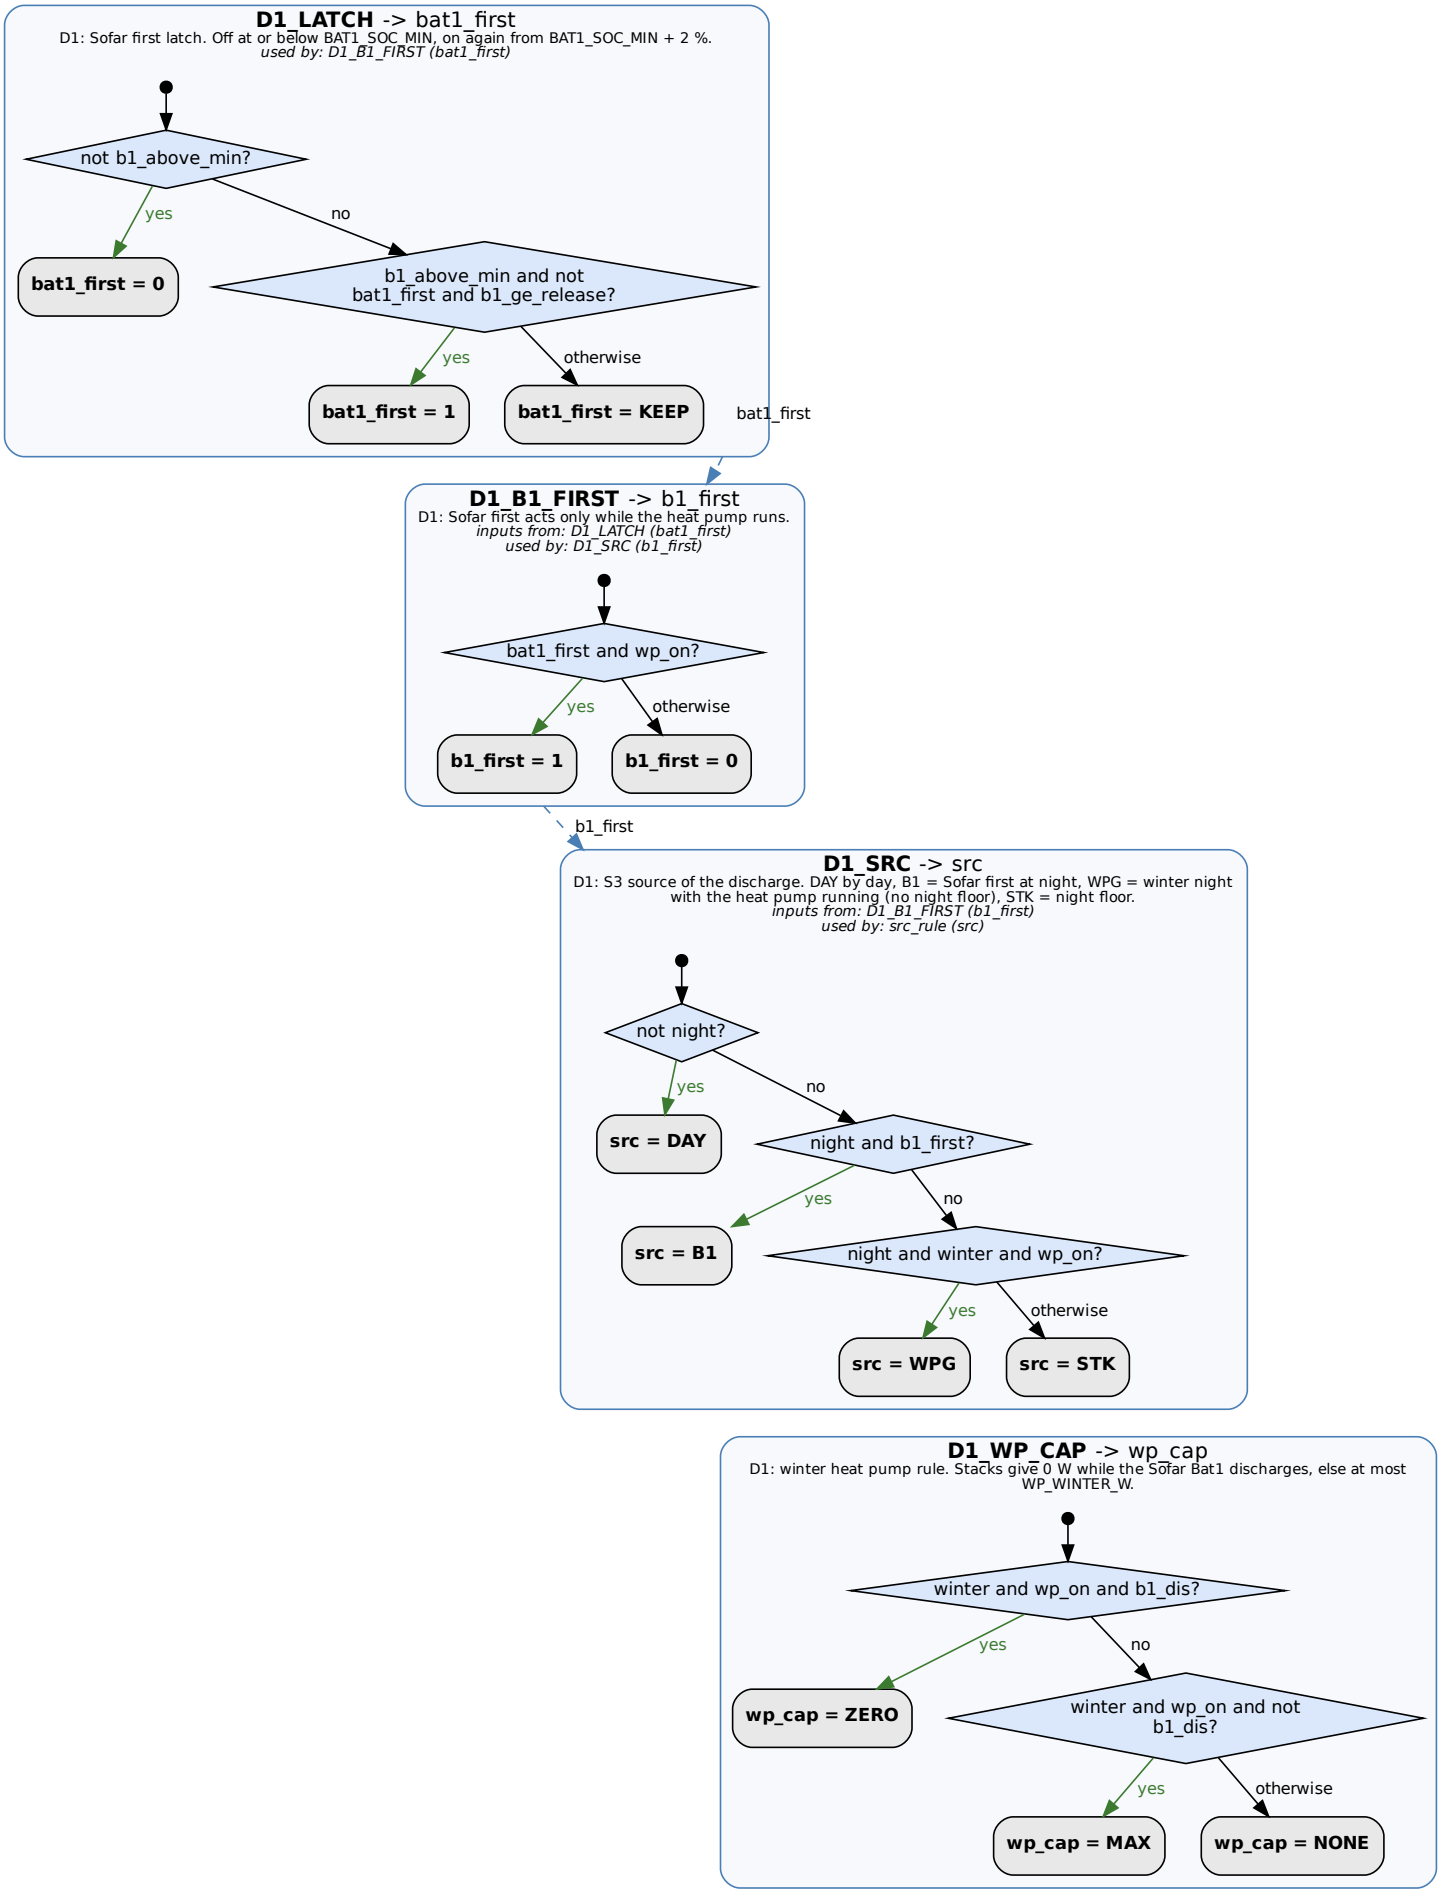



batmonitor 0.74-py - decision flow 2 / 6: D2 - per stack: charge mode and the latches protection / force charge / LOW

from c/bm_tables.h: each table is asked row by row, top to bottom; the first row that matches decides (yes -> its result, no -> the next row)

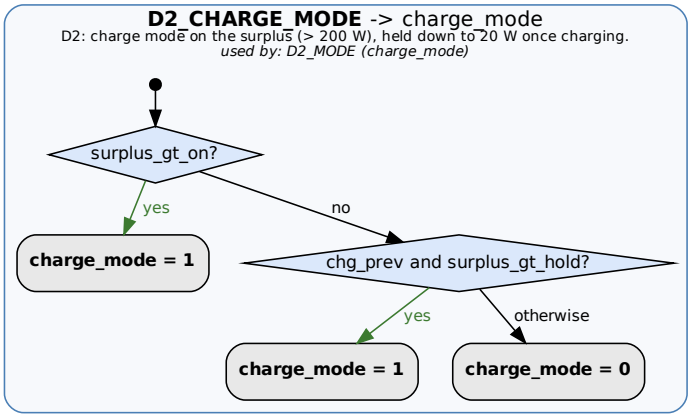

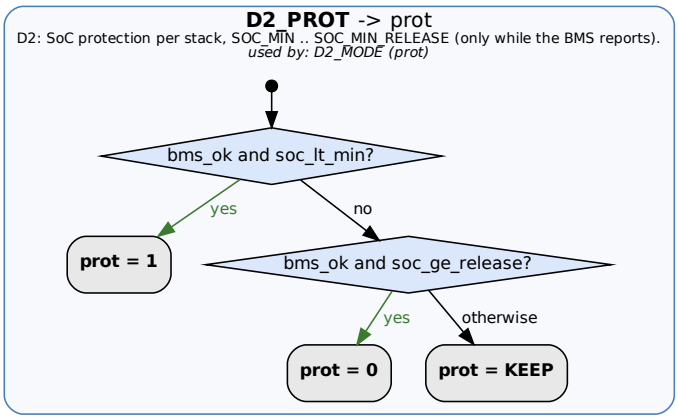


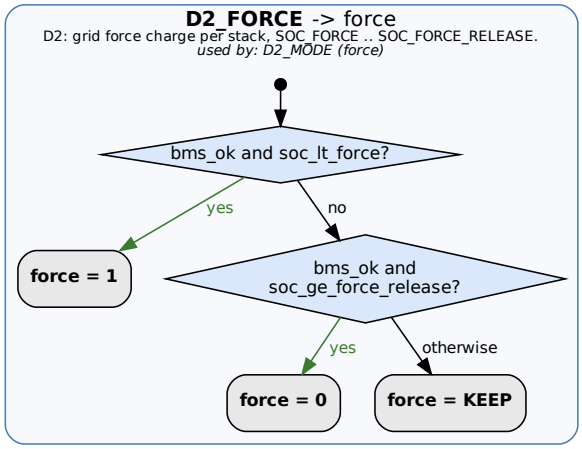

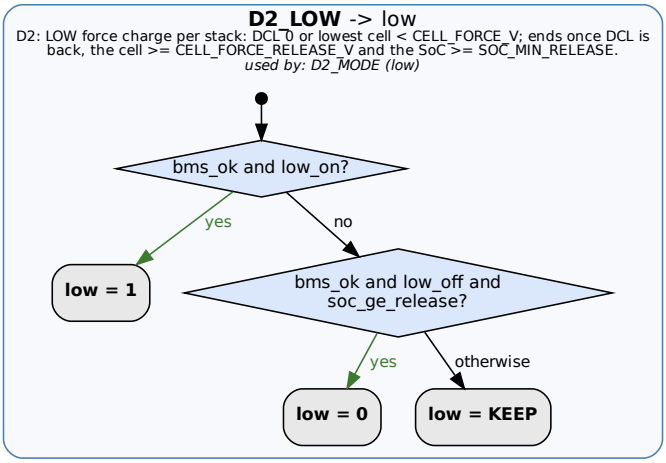


batmonitor 0.74-py - decision flow 3 / 6: D2 - mode per stack (priority top to bottom)


from c/bm_tables.h: each table is asked row by row, top to bottom; the first row that matches decides (yes -> its result, no -> the next row)

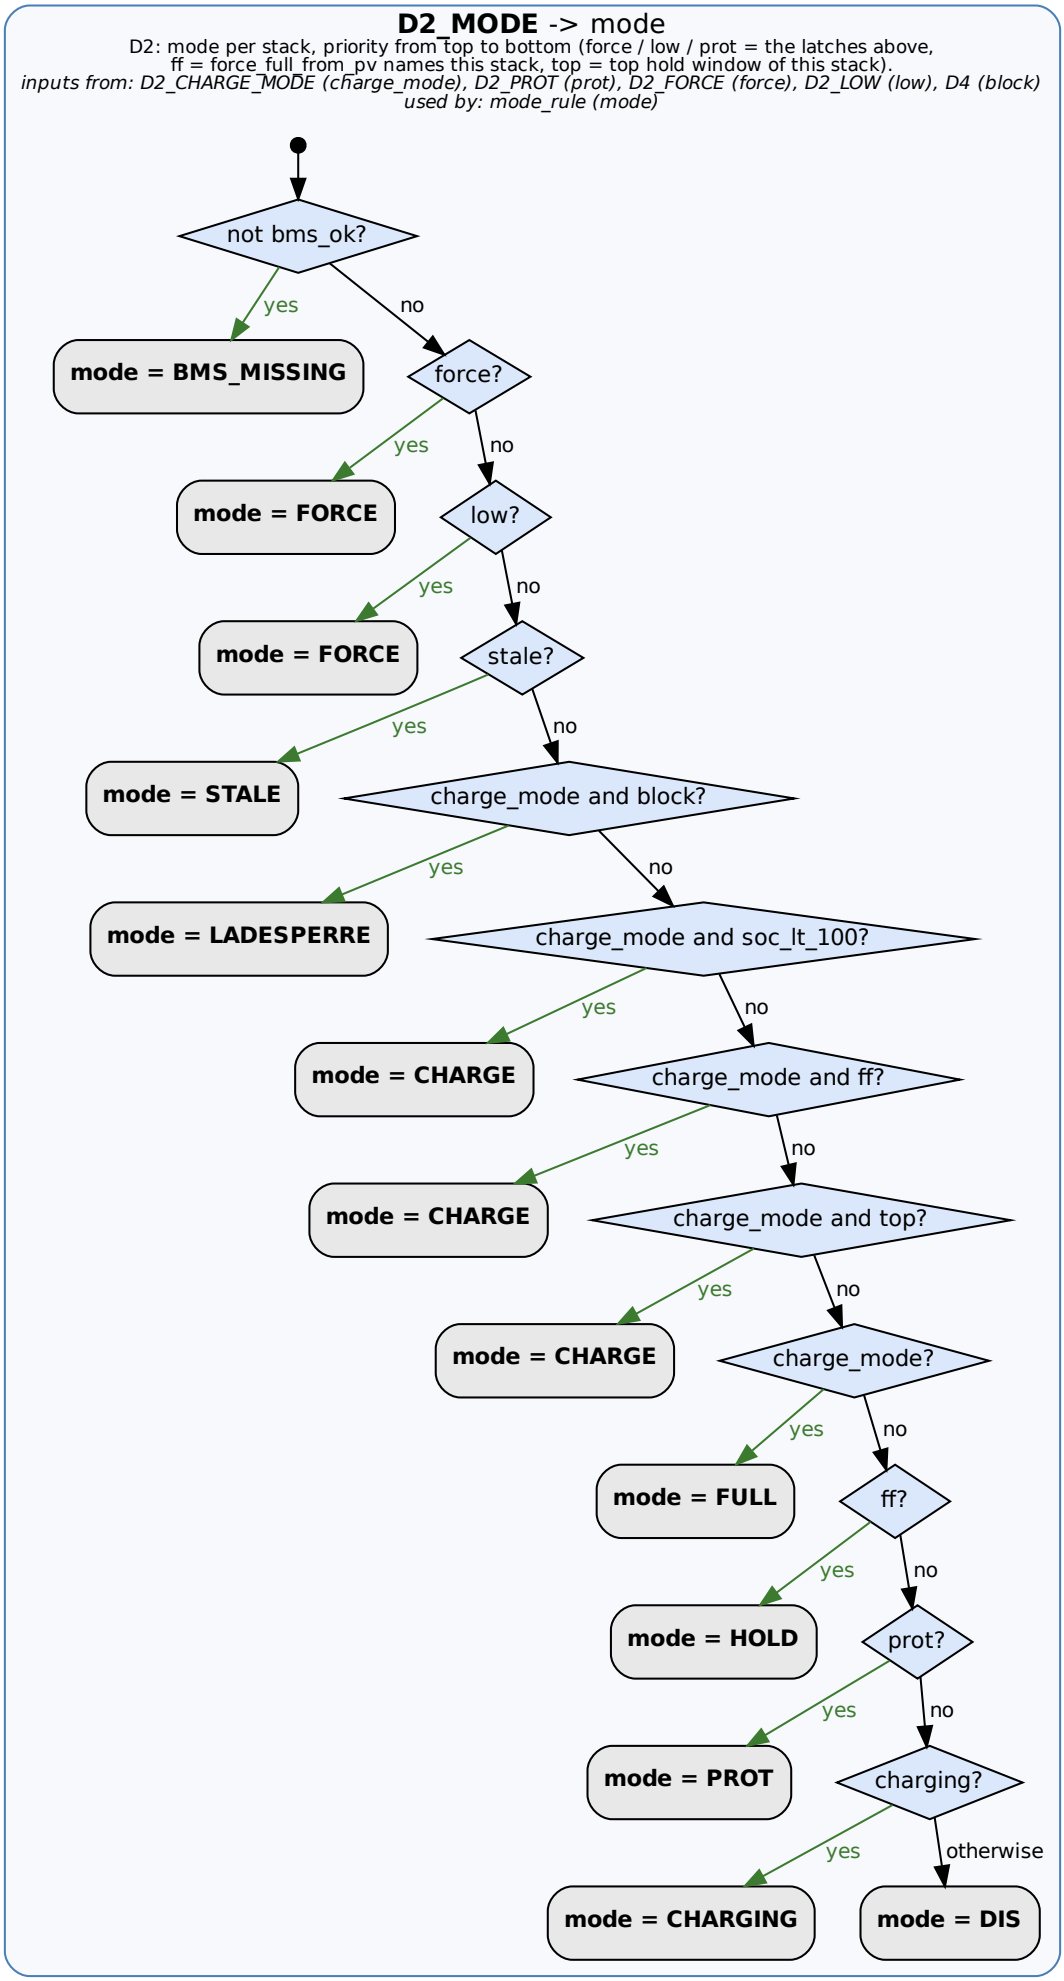

batmonitor 0.74-py - decision flow 4 / 6: SoC balancing and D3 discharge PROP / IDLE


from c/bm_tables.h: each table is asked row by row, top to bottom; the first row that matches decides (yes -> its result, no -> the next row)

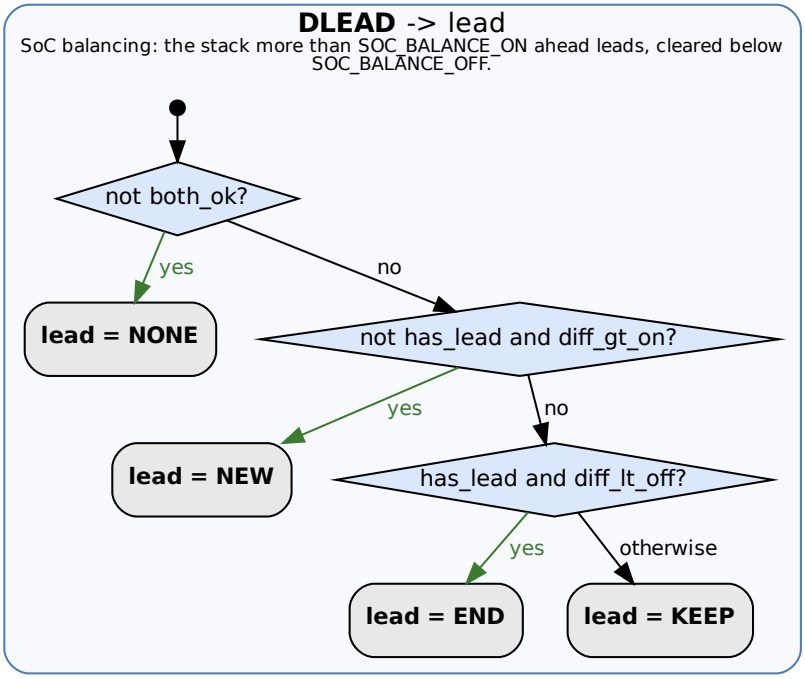


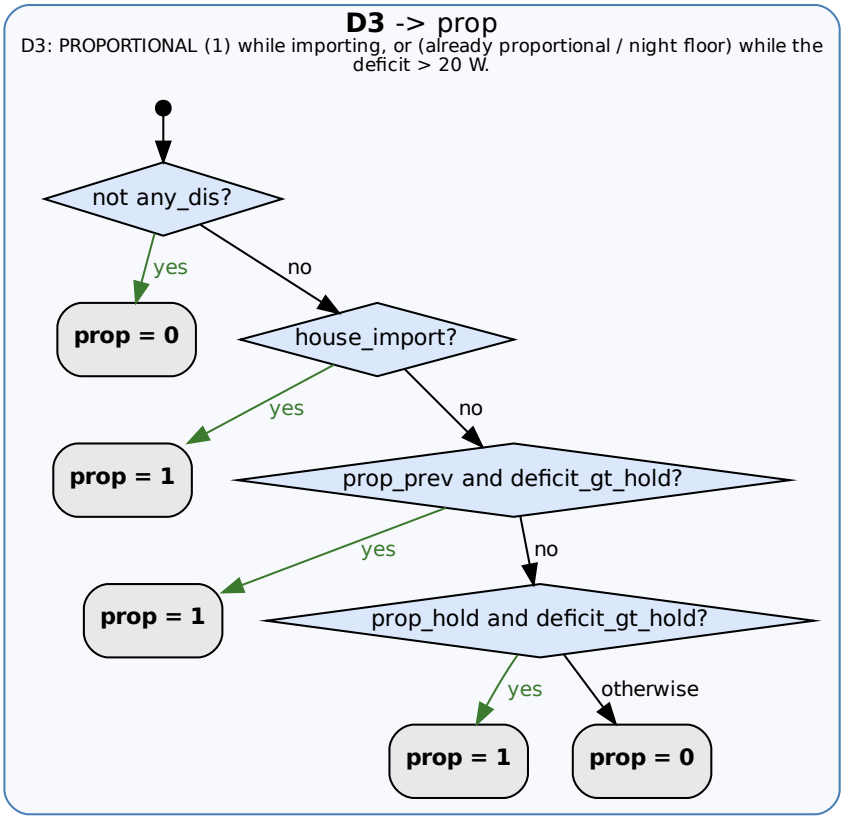

batmonitor 0.74-py - decision flow 5 / 6: D4 - summer peak window

from c/bm_tables.h: each table is asked row by row, top to bottom; the first row that matches decides (yes -> its result, no -> the next row)

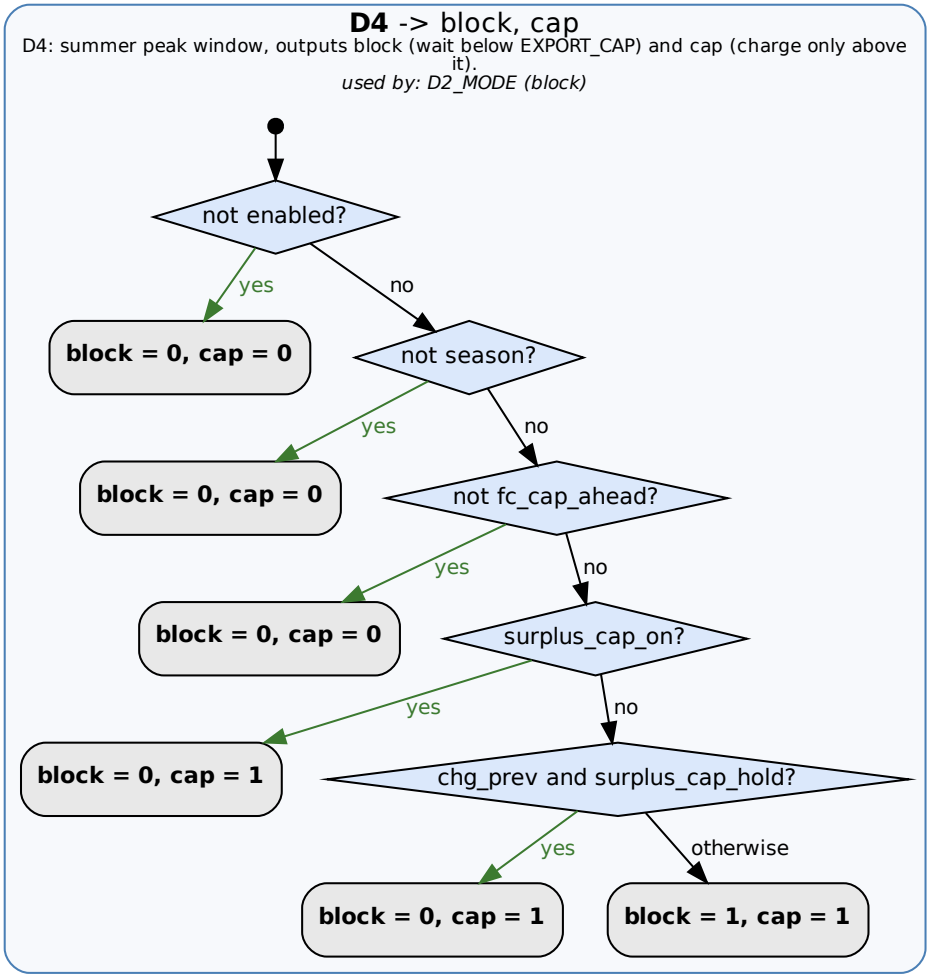

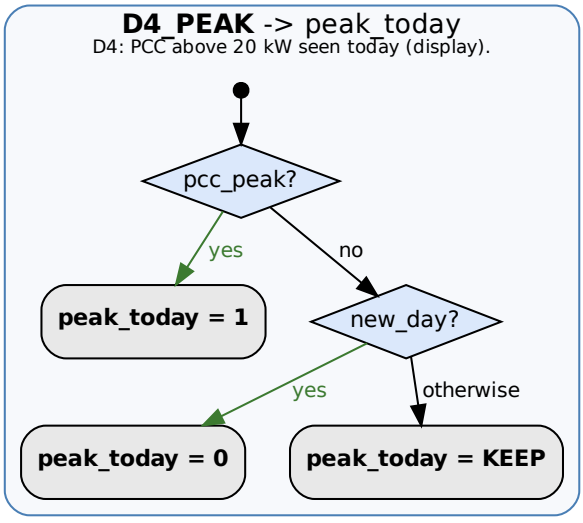

batmonitor 0.74-py - decision flow 6 / 6: D5 - DO4 pulse, D7 - house on AC-out1

from c/bm_tables.h: each table is asked row by row, top to bottom; the first row that matches decides (yes -> its result, no -> the next row)

