

DT/DM INSPECTION REPORT

1

INSPECTOR	
DATE	
SERIAL #	

DT-1 ☐ DT-2 ☐ DT-3 ☐ DM-1 ☐ DM-2 ☐ DM-3 ☐

Y-Axis Pitch

F _____

M _____

B _____



1. FLATNESS OF TABLE TRAVEL MOVEMENTS

Read Level at Front, Middle, Back for both X & Y Axis Directions.


Digi-Pas Level: Record the values.

Federal Level: Record the values.

Bubble Level: Draw in the bubble position.

Federal Spec
(NTE 0.0005 / 10")
(NTE 12.7µm / 250mm)

Digi-Pas Spec
(NTE 0.0015 / 10")
(NTE 38.1µm / 250mm)




Y-Axis Roll



F _____



M _____



B _____

2. FLATNESS OF TABLE

MOUNT INDICATOR TO SPINDLE HEAD AND MOVE X & Y-AXIS OVER FULL RANGE.

X-Axis Measured Value: _____

(NTE 0.001"/10" (.0015 Max)


(NTE 12.7µm / 250 mm (38 µm Max)

Y-Axis Measured Value: _____


(NTE 0.001"/10" (.0015 Max)

(NTE 25.4µm / 250 mm (38 µm Max)

MOVE X-AXIS OVER FULL RANGE

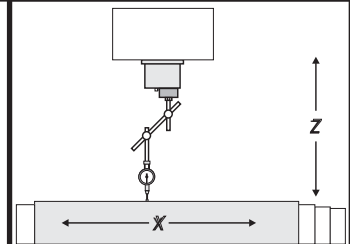

MOVE Y-AXIS OVER FULL RANGE

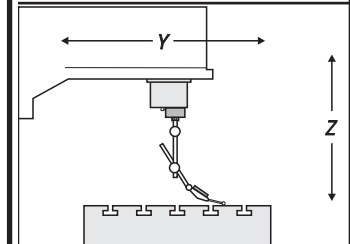

3. INSPECT SQUARENESS OF X-AXIS TO Y-AXIS


ALIGN PRECISION SQUARE WITH X-AXIS INDICATE ALONG Y-AXIS.

MEASURED VALUE: _____

(NTE 0.0005 / 10")

(NTE 12.7µm / 250mm)

X-AXIS INDICATE ALONG Y-AXIS

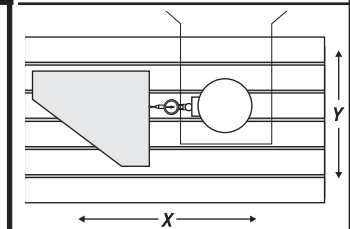

4. T-SLOT STRAIGHTNESS


PLACE INDICATOR IN CENTER T-SLOT OF MILL TABLE. INDICATE OVER FULL TRAVEL OF X-AXIS.

MEASURED VALUE: _____

(.001 Max)

((25.4µm Max)

INDICATE FULL TRAVEL OF X-AXIS

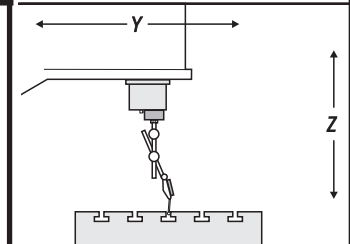

DM/DT INSPECTION REPORT

2


5.A SQUARENESS OF Z-AXIS MOTION TO X-AXIS

PLACE A CYLINDER SQUARE CENTERED ON TABLE. ADJUST CYLINDER TOP TO WITHIN 0.0000 FOR X-Y MOTION (NO MEASURABLE CHANGE IN X/Y MOTION). INDICATE THE SIDE OF THE CYLINDER SQUARE IN X DIRECTION. MOVE Z.

MEASURED VALUE: _____
(NTE 0.0005 / 10")
(NTE 12.7 μ m / 250mm)

Z-AXIS TILT RELATIVE TO X-AXIS

PARALLEL TO X-AXIS




5.B SQUARENESS OF Z-AXIS MOTION TO Y-AXIS

INDICATE THE SIDE OF THE CYLINDER SQUARE IN Y DIRECTION. MOVE Z.

MEASURED VALUE: _____
(NTE 0.0005 / 10")
(NTE 12.7 μ m / 250mm)

Z-AXIS TILT RELATIVE TO Y-AXIS

PARALLEL TO Y-AXIS




6. SPINDLE SWEEP

SPINDLE SWEEP X/Z PLANE

- (1) POSITION INDICATOR WITHIN 5" RADIUS.
- (2) SET ZERO AT A QUADRANT.
- (3) MEASURE EACH 3 REMAINING POSITIONS.

(X) MEASURED DIFFERENCE: _____
(NTE 0.0005 / 10" dia.)
(NTE 12.7 μ m / 250mm)

(Y) MEASURED DIFFERENCE: _____
(NTE 0.0005 / 10" dia.)
(NTE 12.7 μ m / 250mm $\varnothing$)

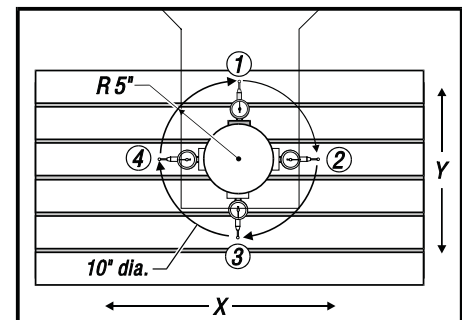


7.A SPINDLE RUNOUT AT TAPER

RUNOUT OF TAPER

MEASURED VALUE: _____

(RUNOUT OF TAPER 0.0002" [5.08 μ m] TIR)



7.B SPINDLE RUNOUT ON TEST TOOL BAR

RUNOUT AT BASE OF BAR

RUNOUT AT 6 INCHES FROM BASE

NVT geen gereedschap

(1) MEASURED VALUE: _____
(RUNOUT AT BASE OF BAR 0.0005 [12.7 μ m] TIR)

(2) MEASURED VALUE: _____
(RUNOUT AT 6" FROM BASE 0.001 [25.4 μ m] TIR)

