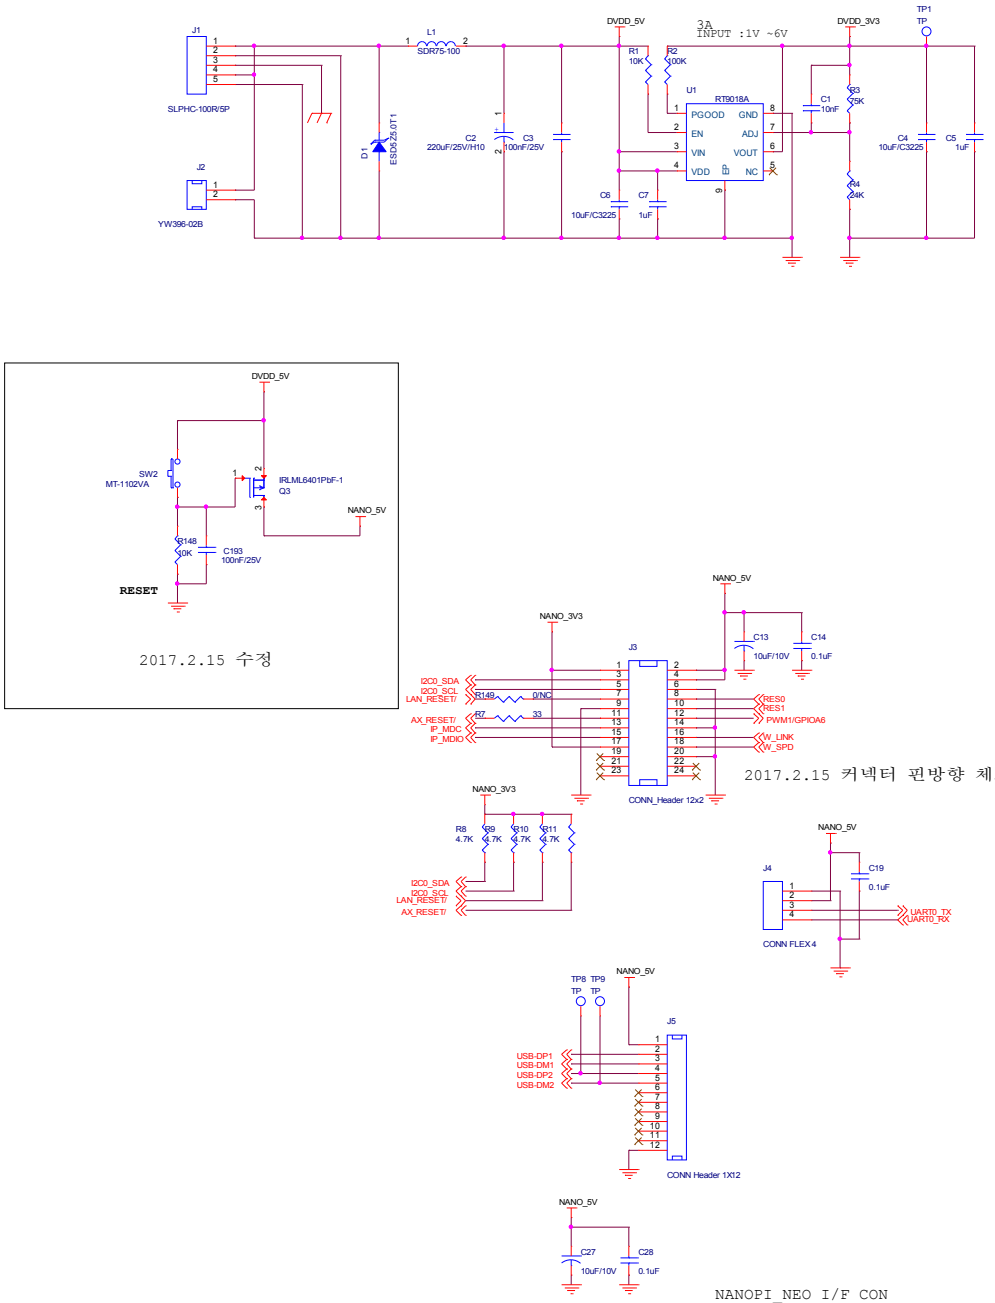
MODEL NAME	E3DP-MAIN
DRAWN	YJ YEOM
DESIGN	YJ YEOM
CHECK	YJ YEOM
APPROVE	YJ YEOM
CREATE DATE	2017.01
PCB VERSION	


E3DP-MAIN


VERSION : V 1.0

PAGE01 : TITLE
PAGE02 : DOUMENT
PAGE03 : POWER
PAGE04 : ETHERNET_LAN
PAGE05 : ETHERNET_MDI
PAGE06 : AX88772C


Title: CTR-600_MB : TITEL		
Size: A4	Document Number: GES CO., LTD.	Rev: <Rev
Date: Wednesday, April 12, 2017	Sheet 1 of 7	



5
4
3
2
1
D
C
B
A
J1
SLPHC-100R/5P
J2
YW396-02B
L1
SDR75-100
D1
ESD5Z5.0T1
C2
220uF/25V/H10
C3
100nF/25V
DVDD_5V
3A
INPUT :1V ~6V
R1
10K
R2
100K
U1
RT9018A
PGOOD
EN
VIN
GND
ADJ
VOUT
VDD
NC
C1
10nF
R3
75K
R4
24K
C4
10uF/C3225
C5
1uF
C6
10uF/C3225
C7
1uF
DVDD_3V3
TP1
TP
SW2
MT-1102VA
IRLML6401PbF-1
Q3
NANO_5V
R148
10K
C193
100nF/25V
RESET
2017.2.15 수정
NANO_3V3
J3
CONN_Header 12x2
C13
10uF/10V
C14
0.1uF
I2C0_SDA
I2C0_SCL
LAN_RESET/
AX_RESET/
IP_MDC
IP_MDIO
R149
0/NC
R7
33
RES0
RES1
PWM1/GPIOA6
W_LINK
W_SPD
2017.2.15 커넥터 핀방향 체크할것
R8
4.7K
R9
4.7K
R10
4.7K
R11
4.7K
J4
CONN FLEX 4
C19
0.1uF
UART0_TX
UART0_RX
TP8
TP9
J5
CONN Header 1X12
USB-DP1
USB-DM1
USB-DP2
USB-DM2
C27
10uF/10V
C28
0.1uF
NANOPI_NEO I/F CON
MT1
MT2
MT3
MT4
MT5
MT6
MT7
나노파이 고정
3.2PI
R5
470
D2
19-217/R6C-P1Q2/3T
FG1
YFW800-01
B1
EBT-3216-350EN
C11
0.1uF/NC
C12
0.1uF/NC
TOP
BOTTOM
RS232
R12
33
R15
33
232_TX
232_RX
R16
33
R17
33
R13
4.7K
R14
4.7K
U2
MAX3232CDR
T1IN
T1OUT
R1OUT
R1IN
T2IN
T2OUT
R2OUT
R2IN
C+
C-
V+
V-
C2+
C2-
VCC3
GND
C20
100nF/25V
C21
100nF/25V
C24
100nF/25V
C25
100nF/25V
C26
100nF/25V
C22
100PF/25V
C23
100PF/25V
CN1
SLPHC-100R/3P
Title
E3DP : POWER
Size
A2
Document Number
GES CO., LTD.
Rev
Date:
Wednesday, April 12, 2017
Sheet
3
of
7

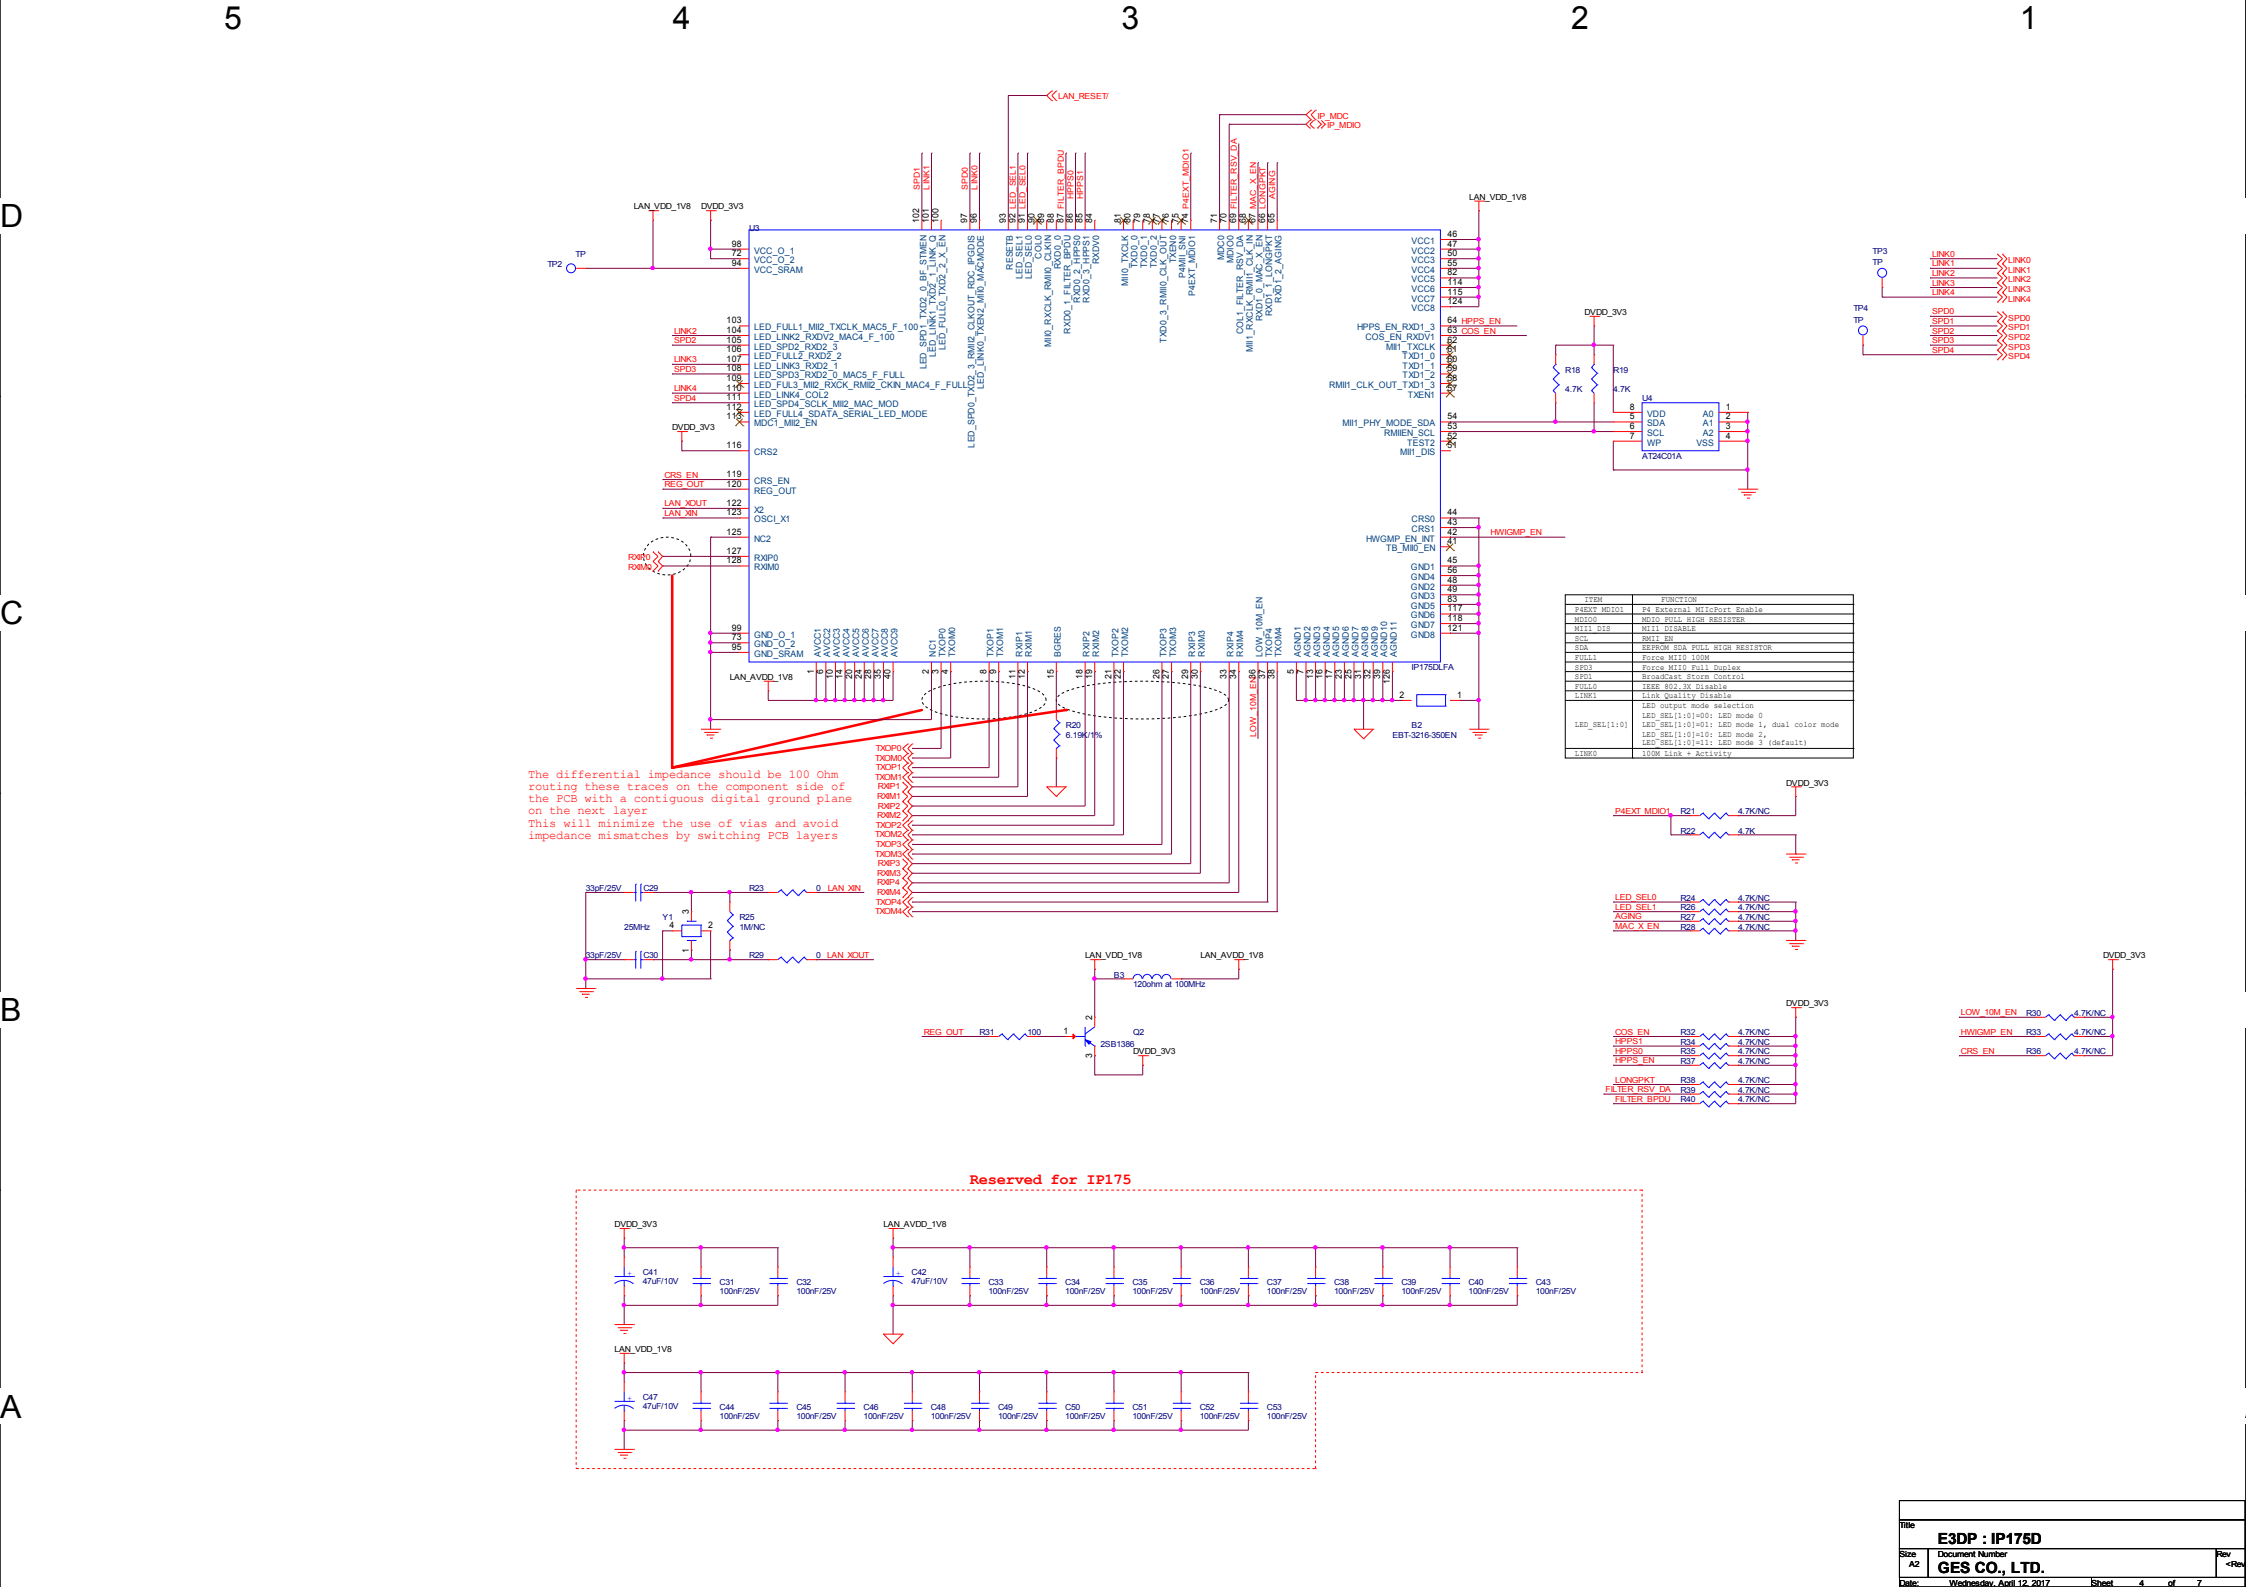
5
4
3
2
1
D
C
B
A
IP175DLFA
AT24C01A
EBT-3216-350EN
The differential impedance should be 100 Ohm routing these traces on the component side of the PCB with a contiguous digital ground plane on the next layer
This will minimize the use of vias and avoid impedance mismatches by switching PCB layers
Reserved for IP175
E3DP : IP175D
GES CO., LTD.

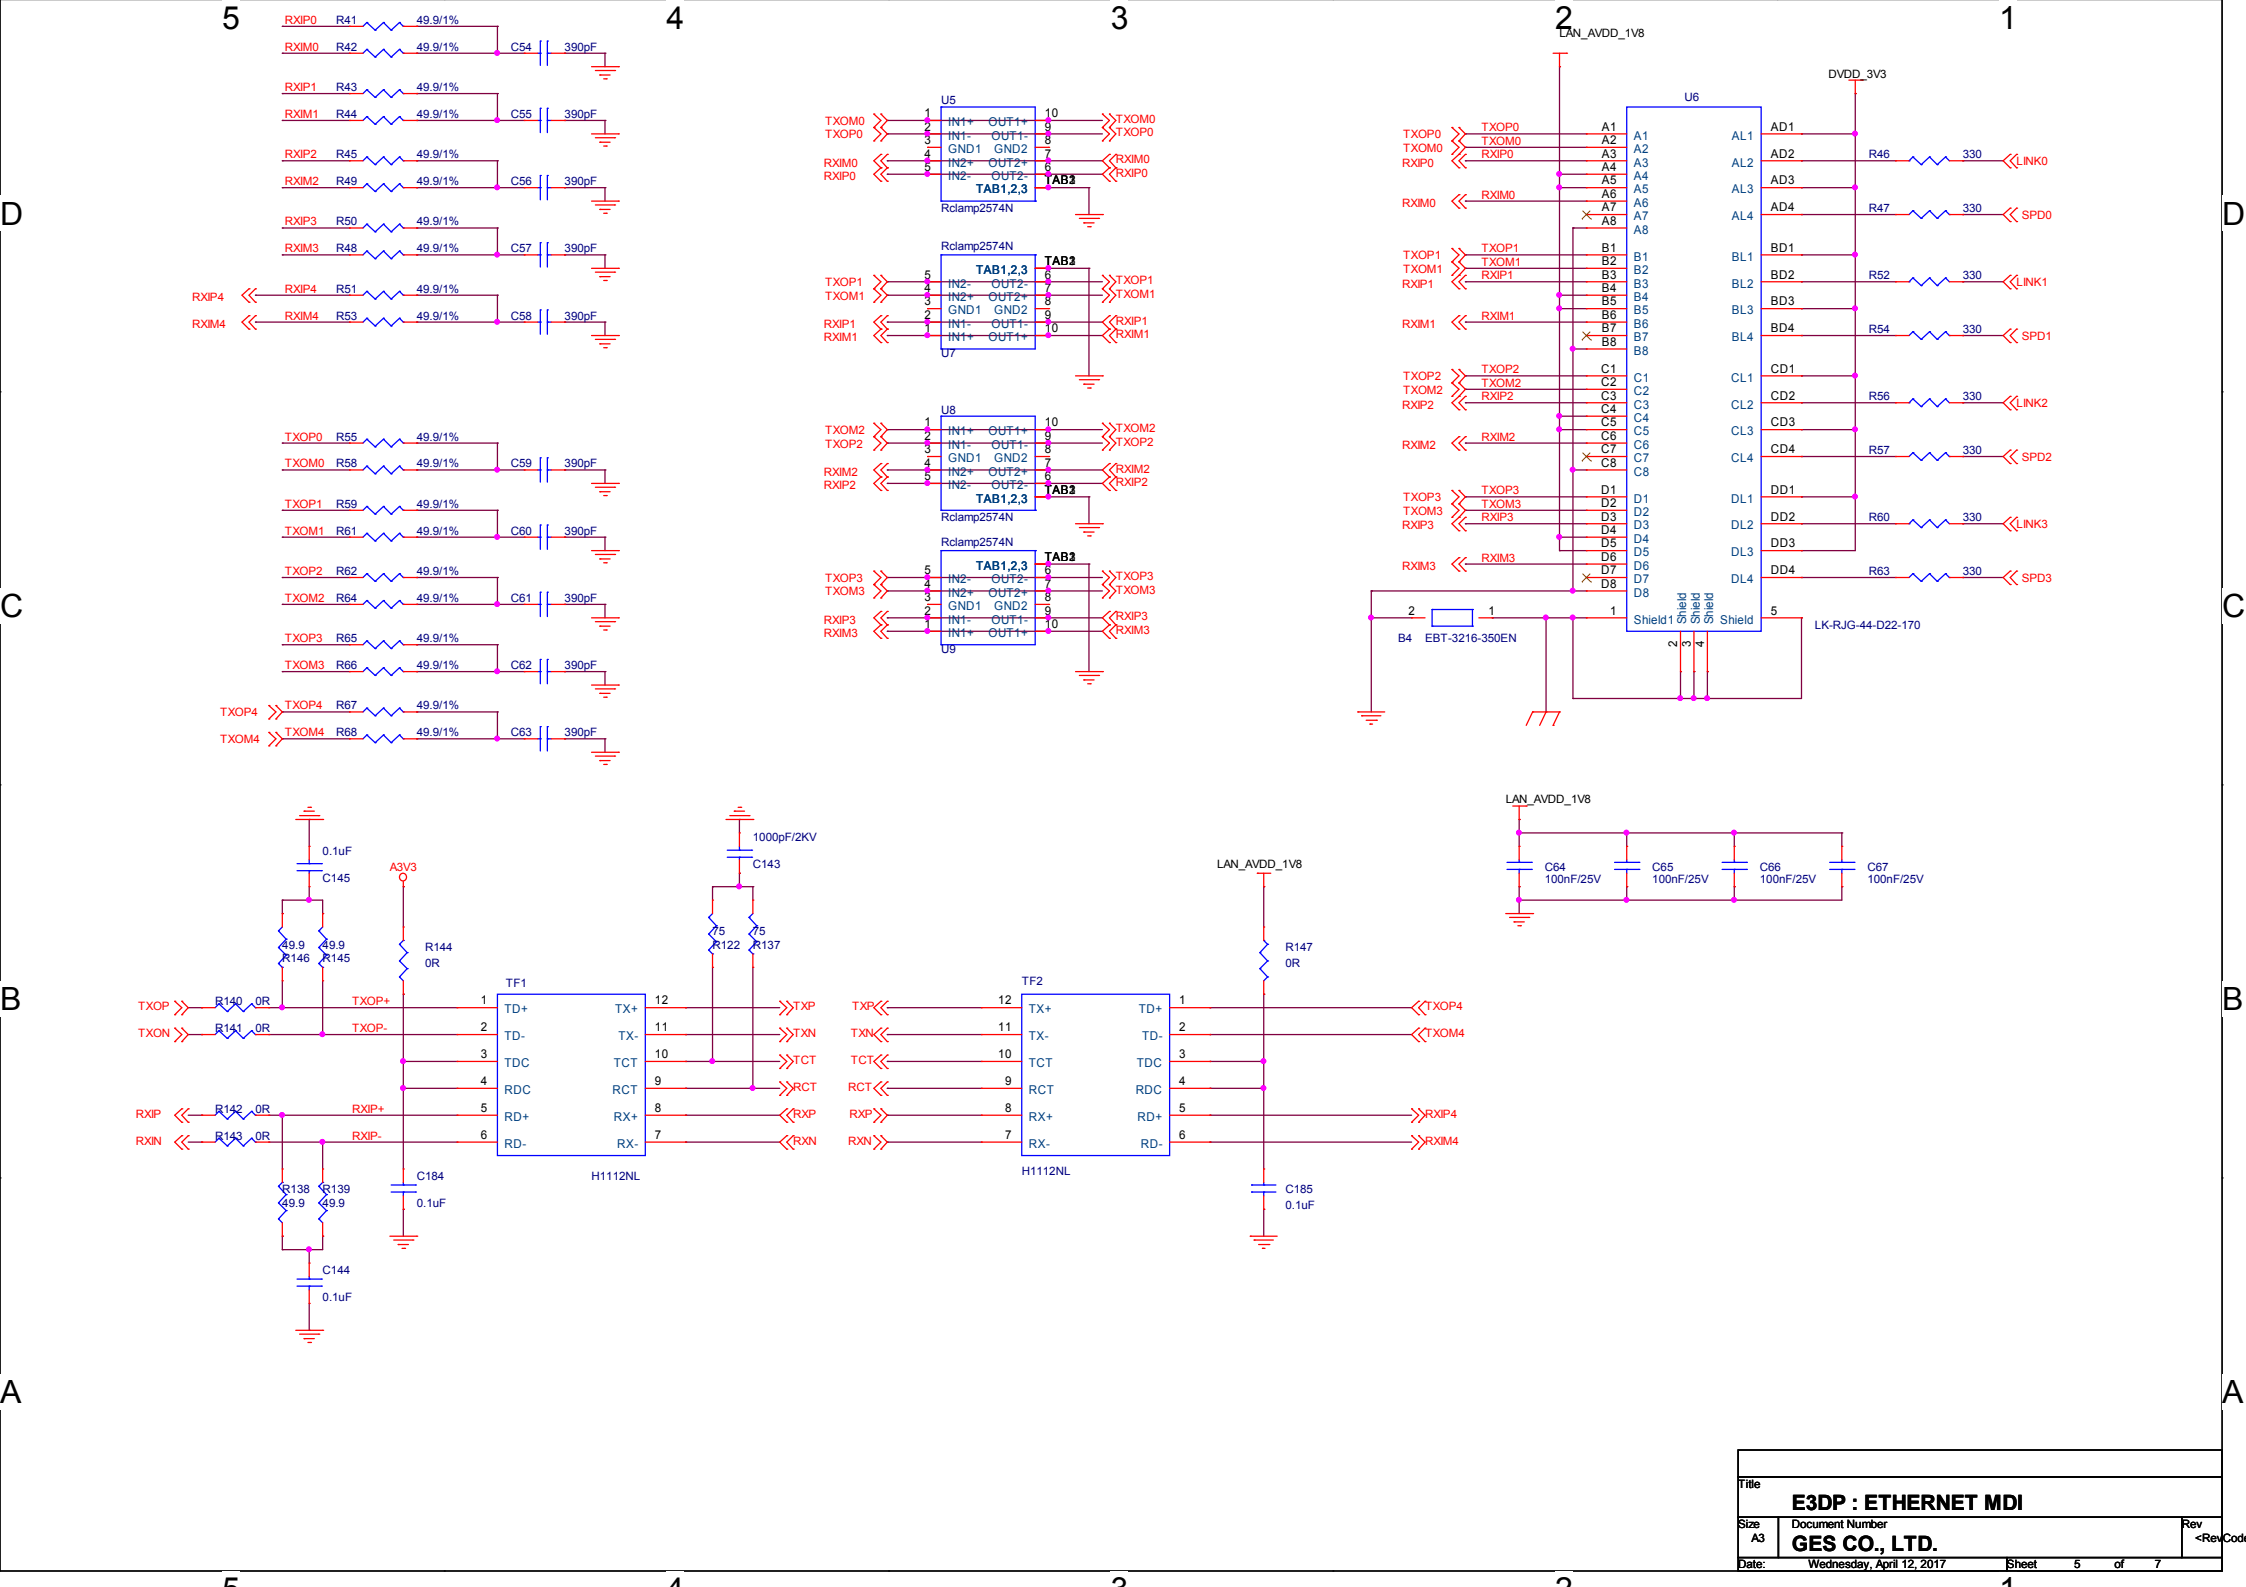

Title	E3DP : ETHERNET MDI
Size	A3
Document Number	GES CO., LTD.
Rev	<RevCode>
Date:	Wednesday, April 12, 2017
Sheet	5 of 7

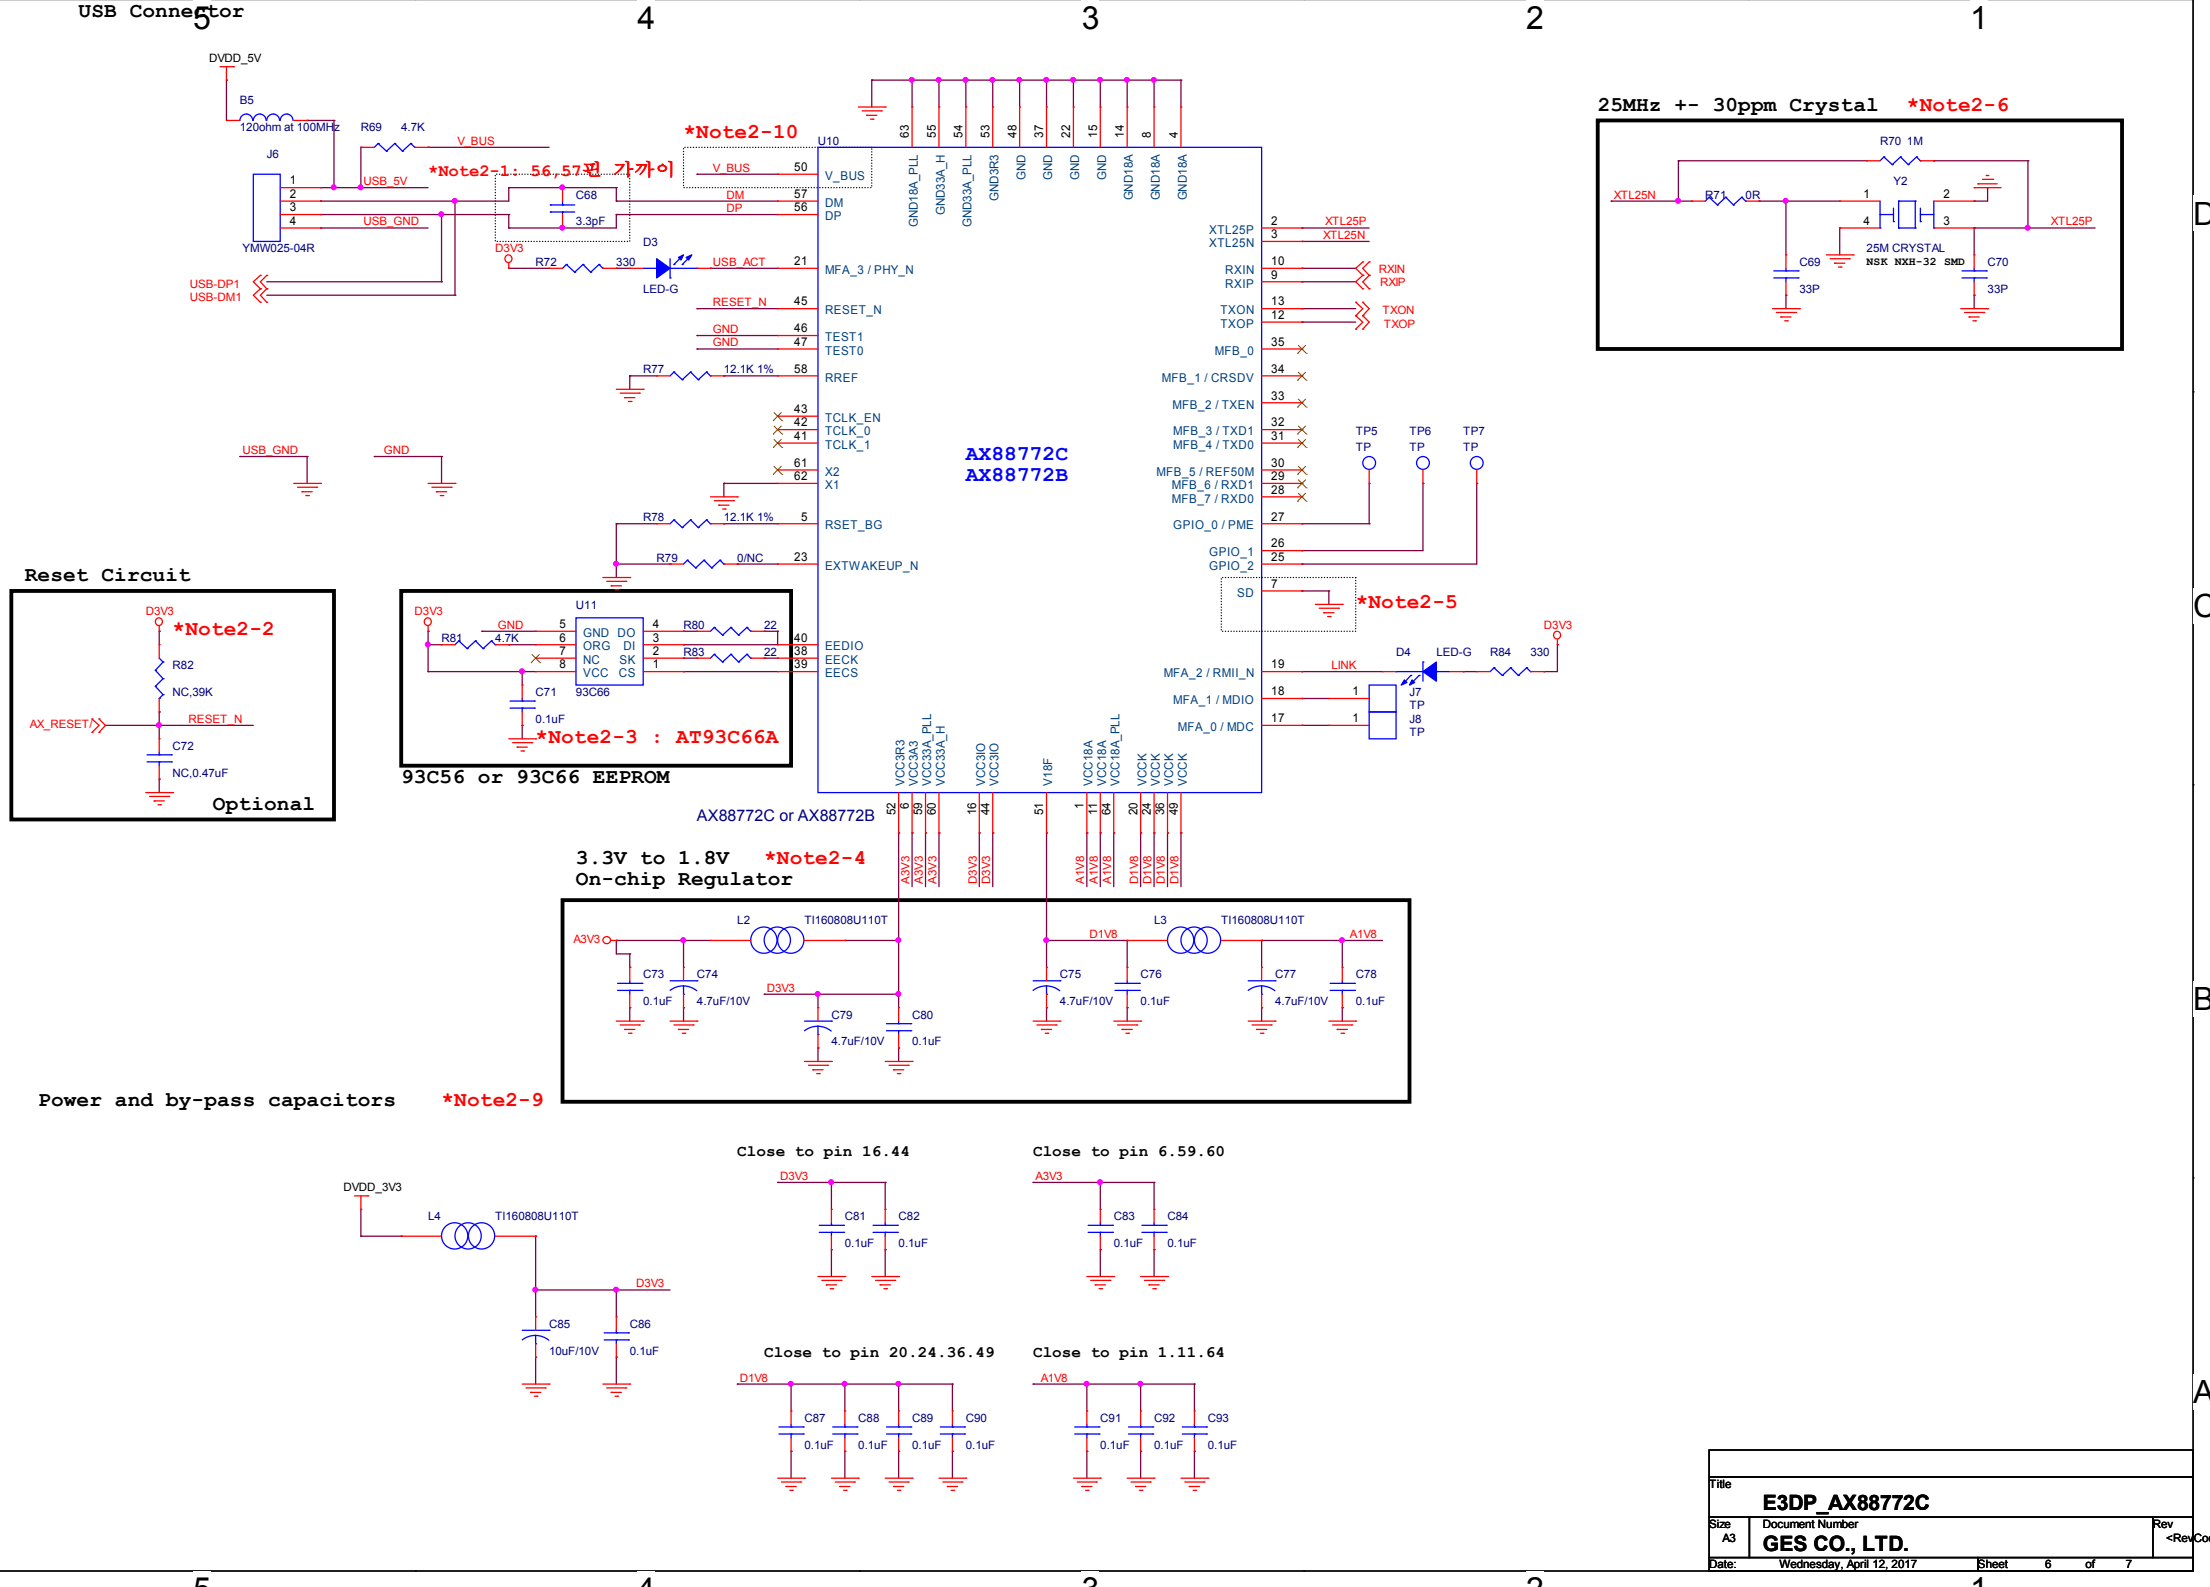
USB Connector
DVDD_5V
B5
120ohm at 100MHz
R69 4.7K
V_BUS
J6
USB_5V
USB_GND
YMW025-04R
*Note2-1: 56,57번 가까이
C68
3.3pF
D3V3
R72 330
D3
LED-G
USB_ACT
USB-DP1
USB-DM1
*Note2-10
U10
V_BUS
DM
DP
RESET_N
TEST1
TEST0
RREF
R77 12.1K 1%
TCLK_EN
TCLK_0
TCLK_1
X2
X1
R78 12.1K 1%
RSET_BG
R79 0/NC
EXTWAKEUP_N
AX88772C
AX88772B
MFB_0
MFB_1 / CRSDV
MFB_2 / TXEN
MFB_3 / TXD1
MFB_4 / TXD0
MFB_5 / REF50M
MFB_6 / RXD1
MFB_7 / RXD0
GPIO_0 / PME
GPIO_1
GPIO_2
SD
*Note2-5
MFA_2 / RMII_N
MFA_1 / MDIO
MFA_0 / MDC
LINK
D4 LED-G R84 330
J7 TP
J8 TP
TP5 TP
TP6 TP
TP7 TP
XTL25P
XTL25N
RXIN
RXIP
TXON
TXOP
25MHz +- 30ppm Crystal *Note2-6
R70 1M
R71 0R
Y2
25M CRYSTAL
NSK NXH-32 SMD
C69 33P
C70 33P
Reset Circuit
*Note2-2
R82 NC,39K
C72 NC,0.47uF
AX_RESET
RESET_N
Optional
U11
93C66
R80 22
R83 22
R81 4.7K
C71 0.1uF
*Note2-3 : AT93C66A
93C56 or 93C66 EEPROM
EEDIO
EECK
EECS
AX88772C or AX88772B
3.3V to 1.8V *Note2-4
On-chip Regulator
L2 TI160808U110T
L3 TI160808U110T
A3V3
D1V8
A1V8
C73 0.1uF
C74 4.7uF/10V
C75 4.7uF/10V
C76 0.1uF
C77 4.7uF/10V
C78 0.1uF
C79 4.7uF/10V
C80 0.1uF
Power and by-pass capacitors *Note2-9
DVDD_3V3
L4 TI160808U110T
C85 10uF/10V
C86 0.1uF
Close to pin 16.44
C81 0.1uF
C82 0.1uF
Close to pin 6.59.60
C83 0.1uF
C84 0.1uF
Close to pin 20.24.36.49
C87 0.1uF
C88 0.1uF
C89 0.1uF
C90 0.1uF
Close to pin 1.11.64
C91 0.1uF
C92 0.1uF
C93 0.1uF
Title
E3DP_AX88772C
Size A3
Document Number
GES CO., LTD.
Rev
Date: Wednesday, April 12, 2017
Sheet 6 of 7

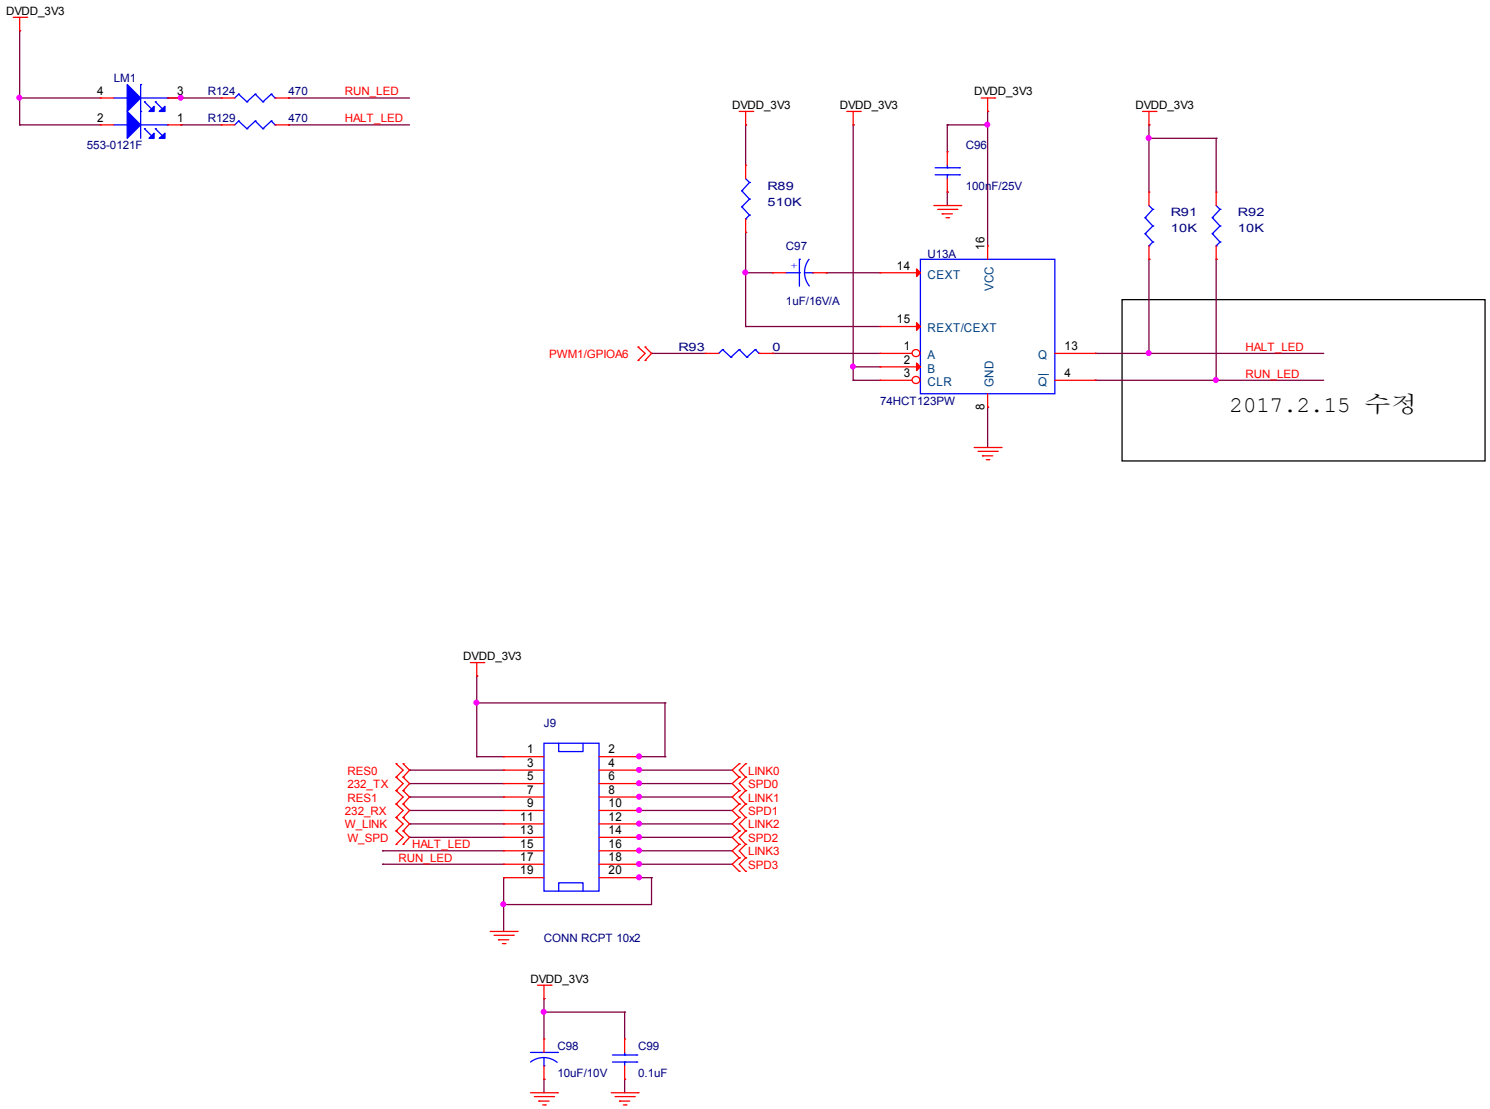

Title	CTR-700_MB : LED& KEY&RTC	
Size A3	Document Number GES CO., LTD.	Rev <RevCode>
Date: Wednesday, April 12, 2017	Sheet 7 of 7	