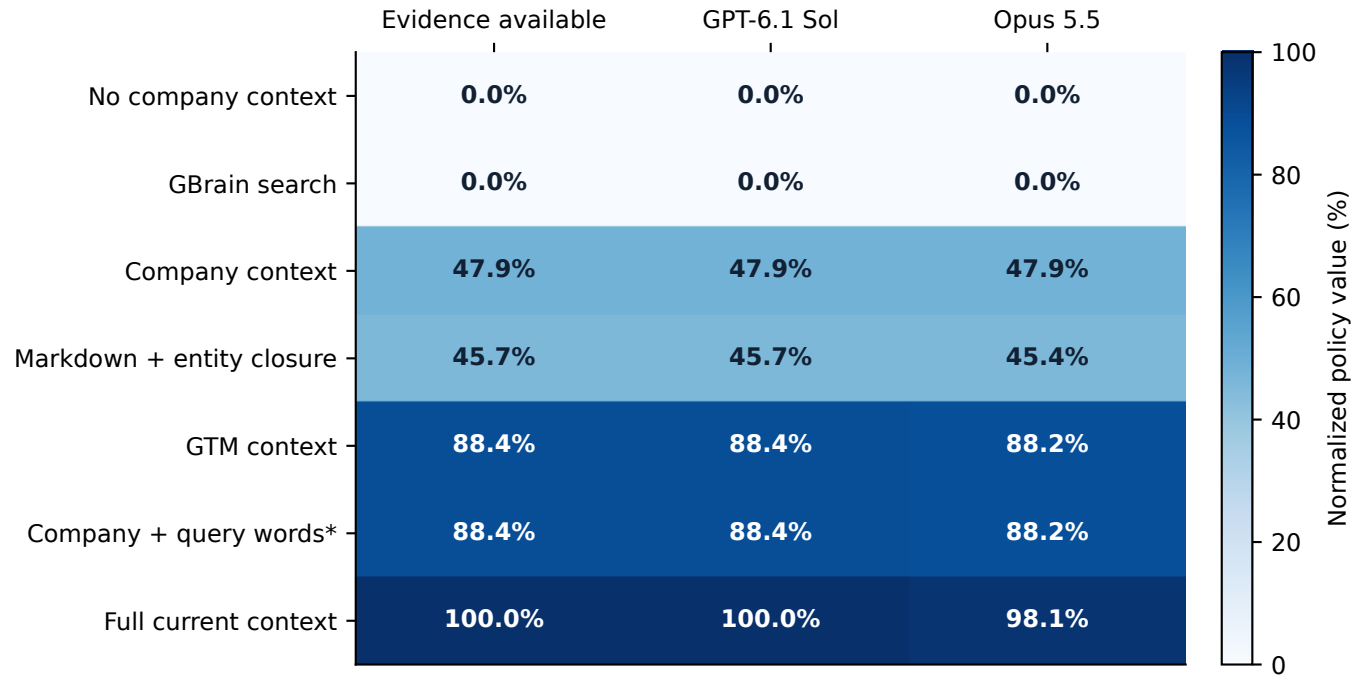

* Identical-input control, conditional on the recorded packet-equivalence audit; no additional model calls.