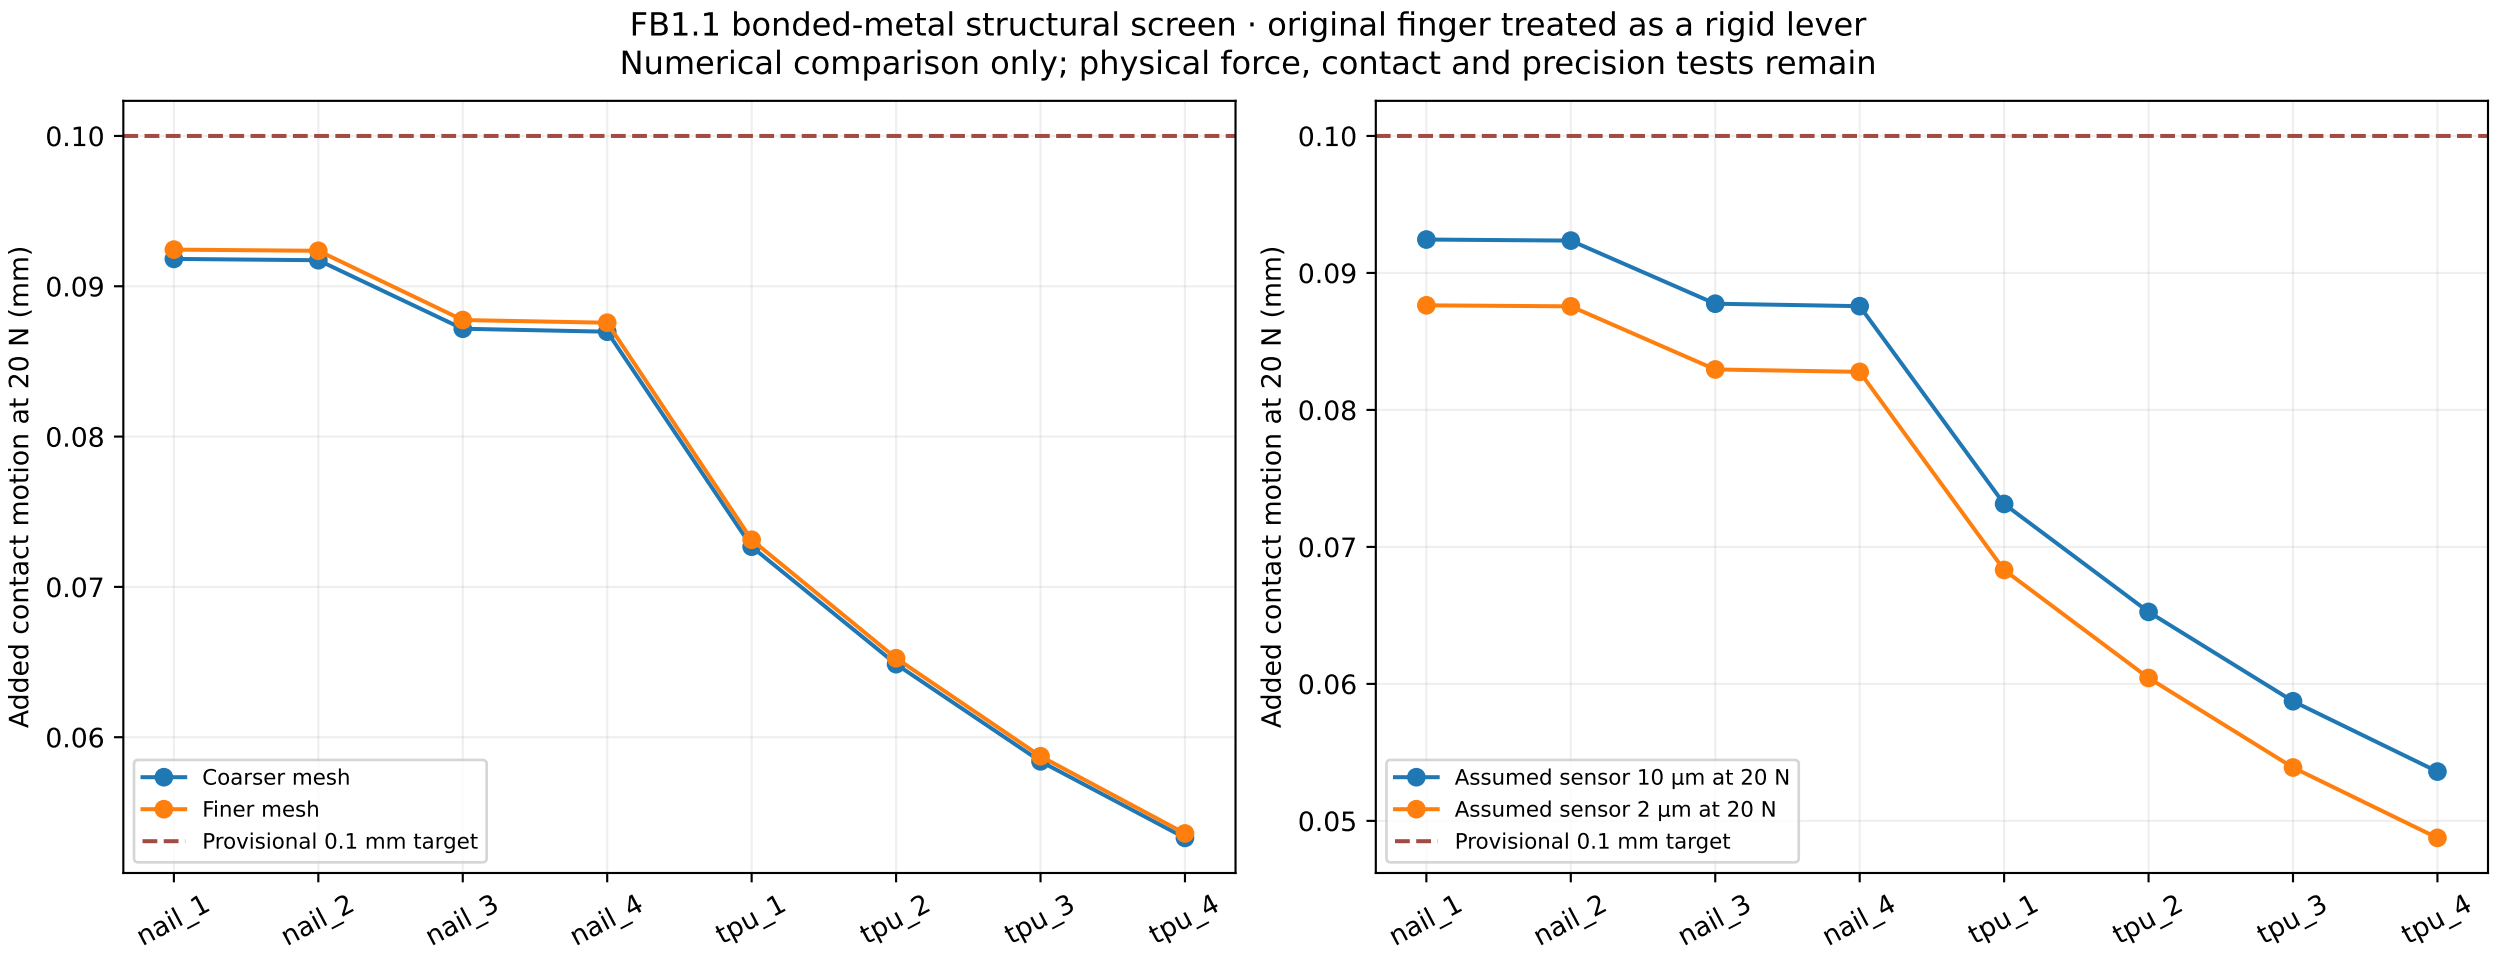
FB1.1 bonded-metal structural screen · original finger treated as a rigid lever
Numerical comparison only; physical force, contact and precision tests remain
Added contact motion at 20 N (mm)
0.10
0.09
0.08
0.07
0.06
Coarser mesh
Finer mesh
Provisional 0.1 mm target
nail_1
nail_2
nail_3
nail_4
tpu_1
tpu_2
tpu_3
tpu_4
Added contact motion at 20 N (mm)
0.10
0.09
0.08
0.07
0.06
0.05
Assumed sensor 10 µm at 20 N
Assumed sensor 2 µm at 20 N
Provisional 0.1 mm target
nail_1
nail_2
nail_3
nail_4
tpu_1
tpu_2
tpu_3
tpu_4