


l1 fixed carrier m3 clearance

6061-T6 aluminum · 50.06 × 35.23 × 30.34 mm overall

Fixed carrier; same rear datum/key as the ENPIRE finger. Use when mating jaw has M3 threads.

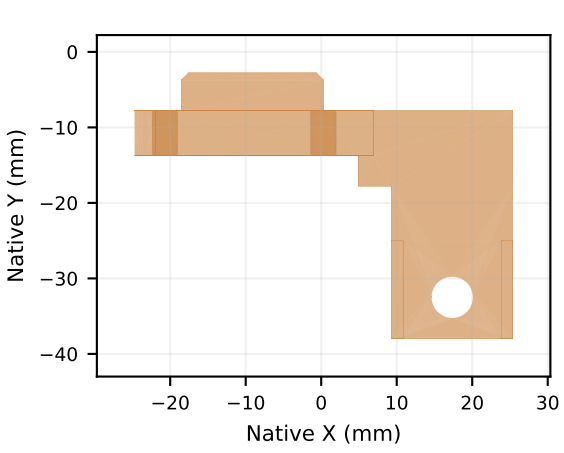

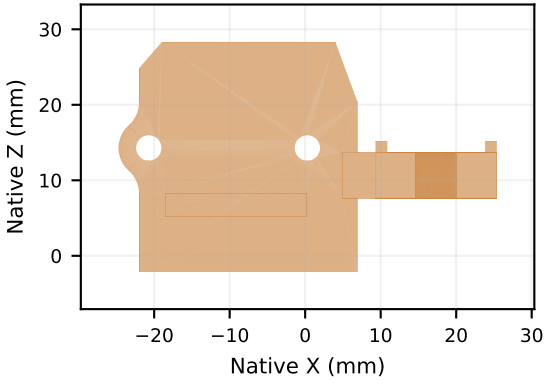

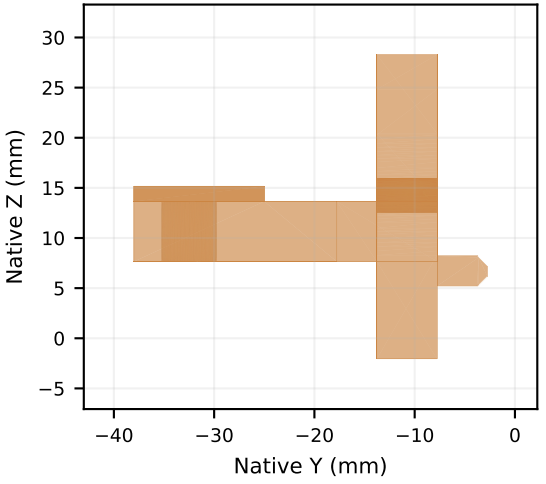

CAD units: mm. STEP is the geometric master; these projected review views are not print-to-scale templates.


Inspect the 13 mm cell seats, M5 fasteners and M3/key interface before machining. No strength qualification is implied.

PETG copies of aluminum load-path parts are fit witnesses only. Original ENPIRE interface: Wenli Xiao / NVIDIA ENPIRE.

l1 fixed carrier m3 tap drill

6061-T6 aluminum · 50.06 × 35.23 × 30.34 mm overall

Fixed carrier with 2.5 mm pilot bores; tap M3×0.5 if the mating jaw requires threads in this part.

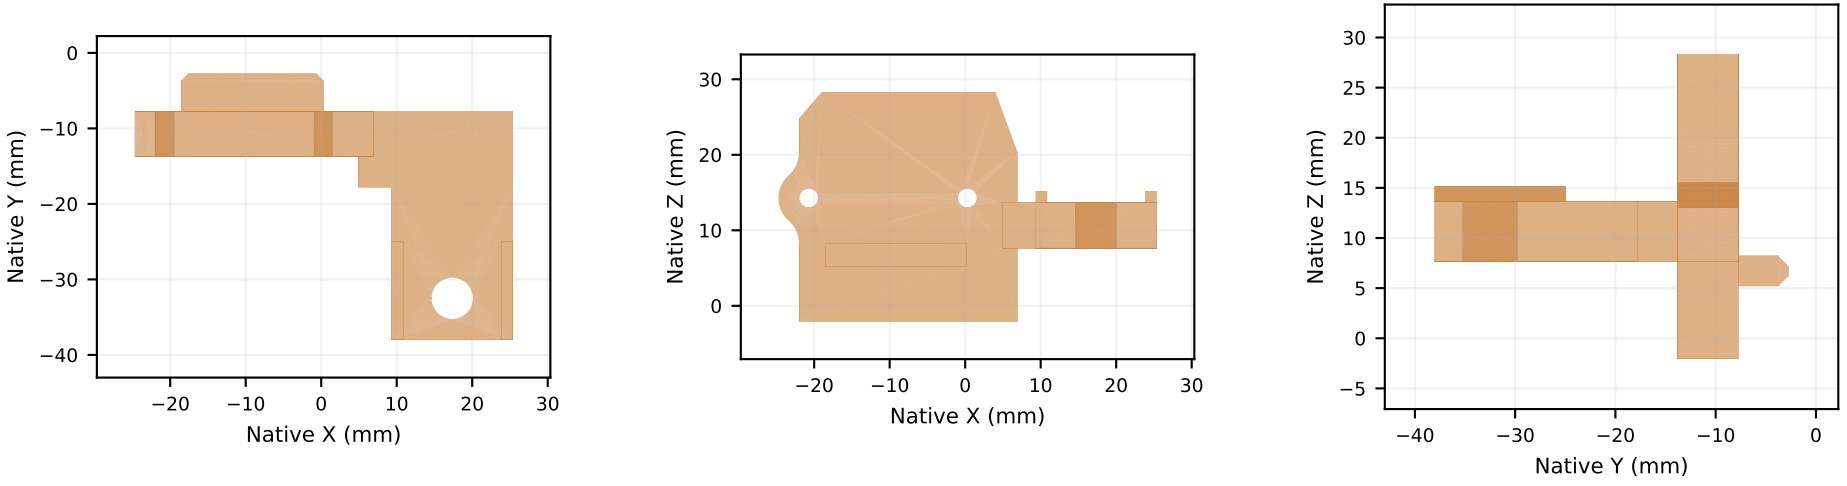

CAD units: mm. STEP is the geometric master; these projected review views are not print-to-scale templates.


Inspect the 13 mm cell seats, M5 fasteners and M3/key interface before machining. No strength qualification is implied.


PETG copies of aluminum load-path parts are fit witnesses only. Original ENPIRE interface: Wenli Xiao / NVIDIA ENPIRE.


l1 floating finger carrier

6061-T6 aluminum · 50.06 × 60.23 × 41.41 mm overall

Carries the unmodified ENPIRE finger with a 20 mm reach extension; attaches only to the load-cell live end.

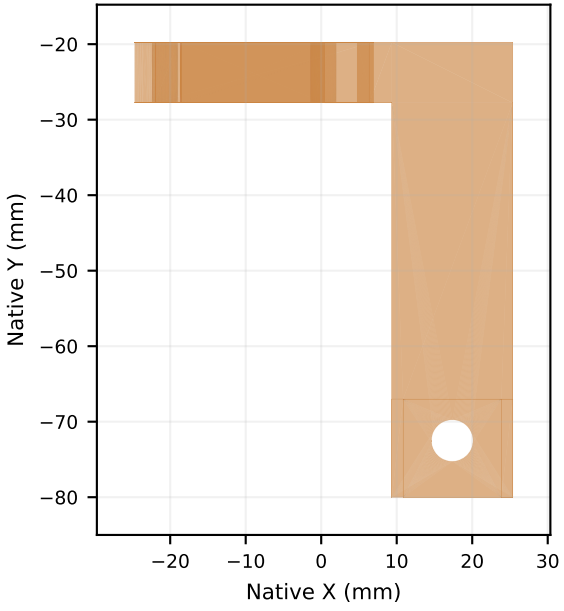

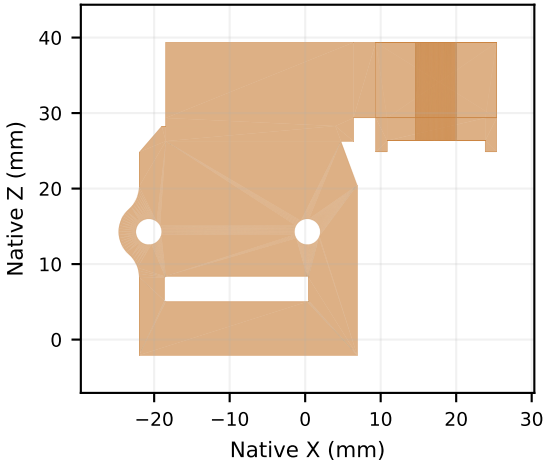

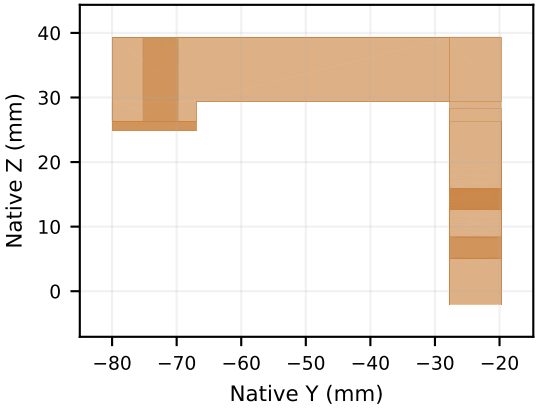

CAD units: mm. STEP is the geometric master; these projected review views are not print-to-scale templates.


Inspect the 13 mm cell seats, M5 fasteners and M3/key interface before machining. No strength qualification is implied.

PETG copies of aluminum load-path parts are fit witnesses only. Original ENPIRE interface: Wenli Xiao / NVIDIA ENPIRE.

tal220b reference

Purchased component · 12.70 × 55.00 × 12.70 mm overall

Purchased TAL220B outline and mounting axes only; internal strain element is not modeled.

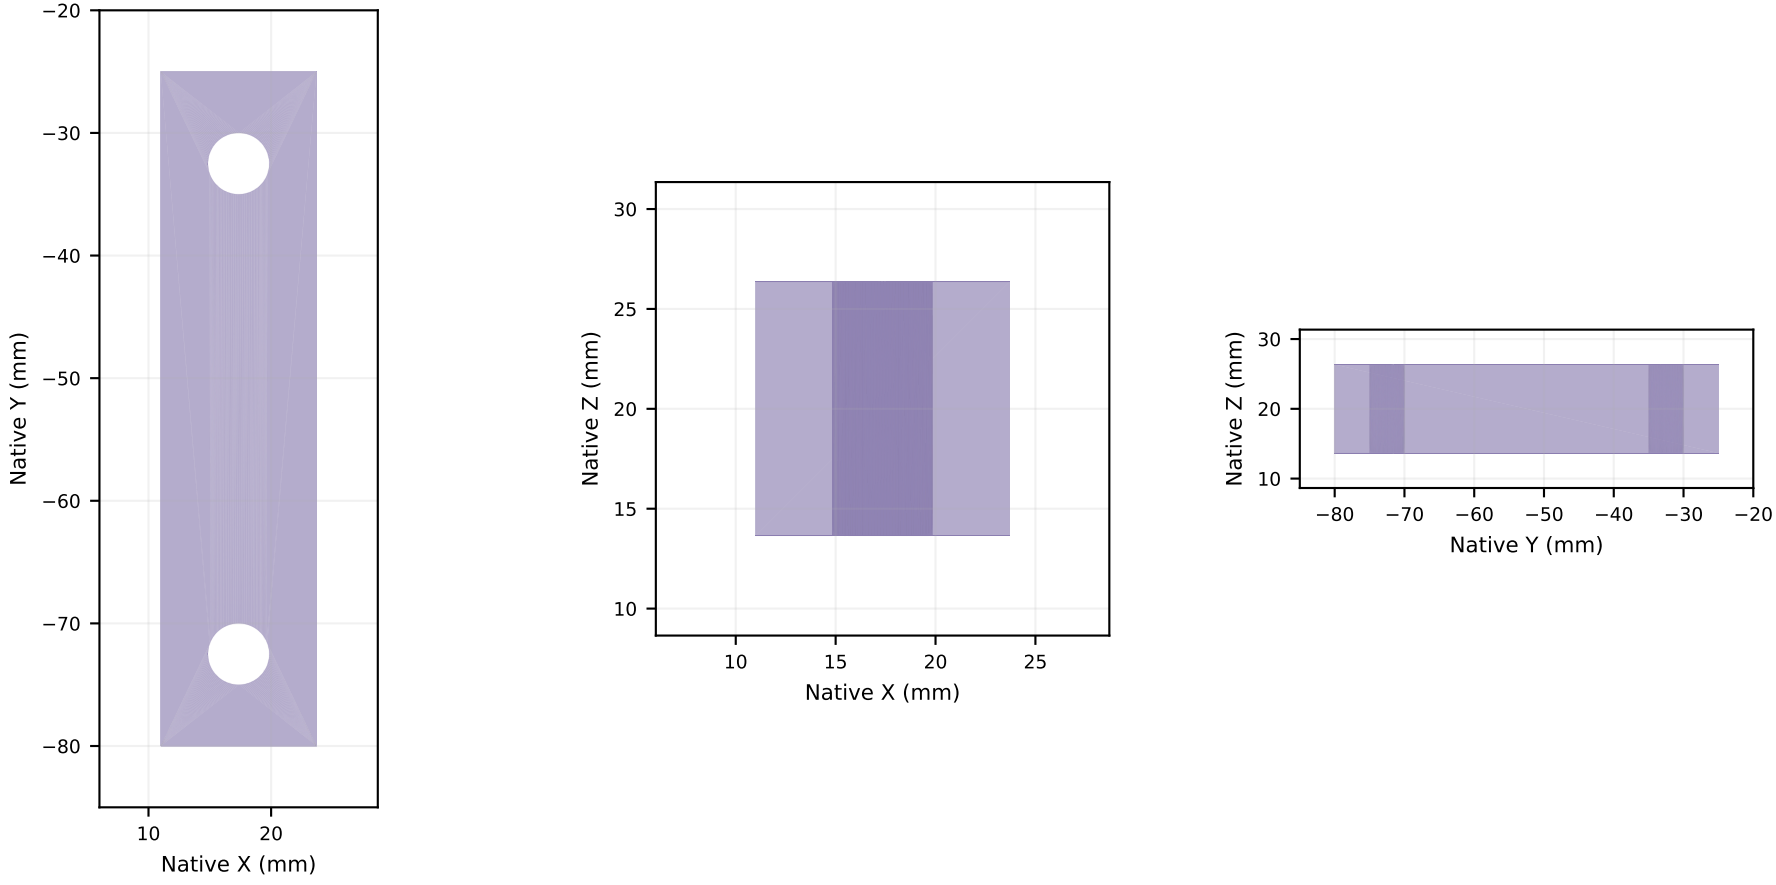

CAD units: mm. STEP is the geometric master; these projected review views are not print-to-scale templates.


Inspect the 13 mm cell seats, M5 fasteners and M3/key interface before machining. No strength qualification is implied.

PETG copies of aluminum load-path parts are fit witnesses only. Original ENPIRE interface: Wenli Xiao / NVIDIA ENPIRE.

l1 bench fixed shoe

6061-T6 aluminum · 40.00 × 42.00 × 10.50 mm overall

Bench mount for the cell wire end. Two M6 stand attachments; one M5 sensor attachment.

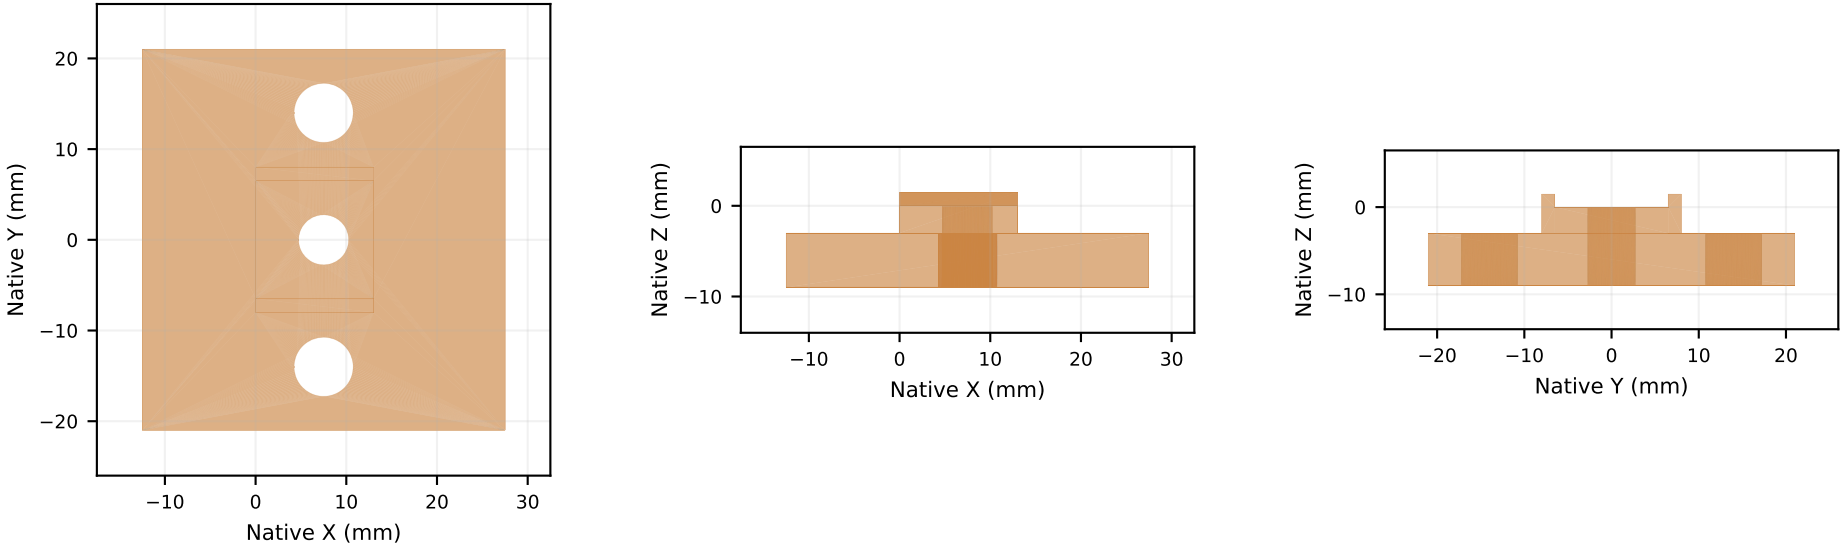

CAD units: mm. STEP is the geometric master; these projected review views are not print-to-scale templates.


Inspect the 13 mm cell seats, M5 fasteners and M3/key interface before machining. No strength qualification is implied.


PETG copies of aluminum load-path parts are fit witnesses only. Original ENPIRE interface: Wenli Xiao / NVIDIA ENPIRE.


l1 bench live spacer

6061-T6 aluminum · 13.00 × 16.00 × 4.50 mm overall

13 mm end clamp and 3 mm gap above the active beam; shared by the two test arms.

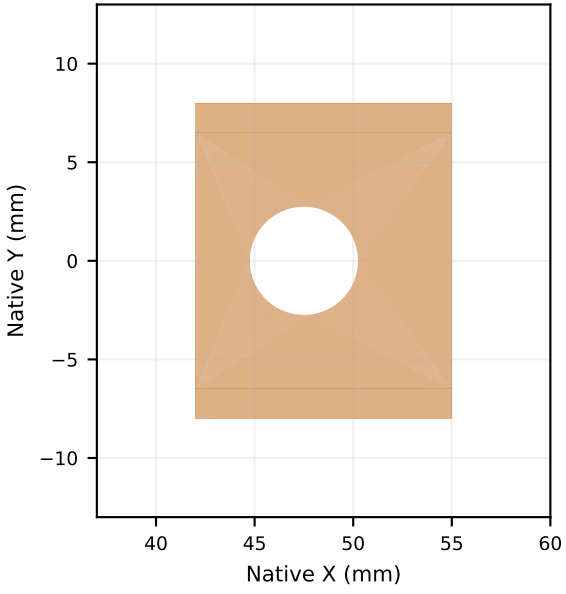

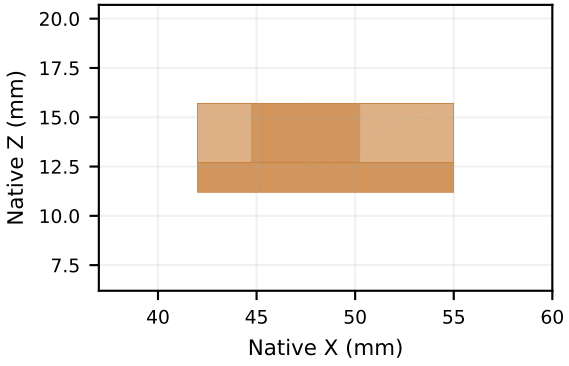

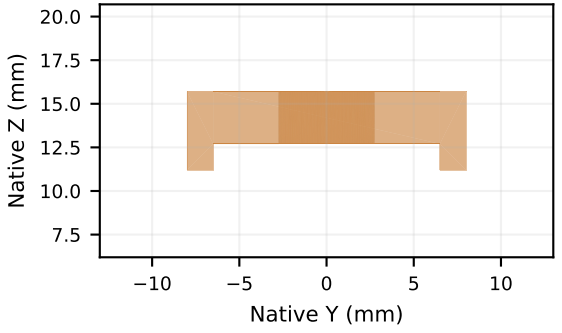

CAD units: mm. STEP is the geometric master; these projected review views are not print-to-scale templates.


Inspect the 13 mm cell seats, M5 fasteners and M3/key interface before machining. No strength qualification is implied.

PETG copies of aluminum load-path parts are fit witnesses only. Original ENPIRE interface: Wenli Xiao / NVIDIA ENPIRE.

l1 long test arm

6061-T6 aluminum · 280.00 × 25.40 × 6.35 mm overall

20 N off-center response fixture. Use the load-cell live-end M5 attachment; ports are load locations, not a moment rating.

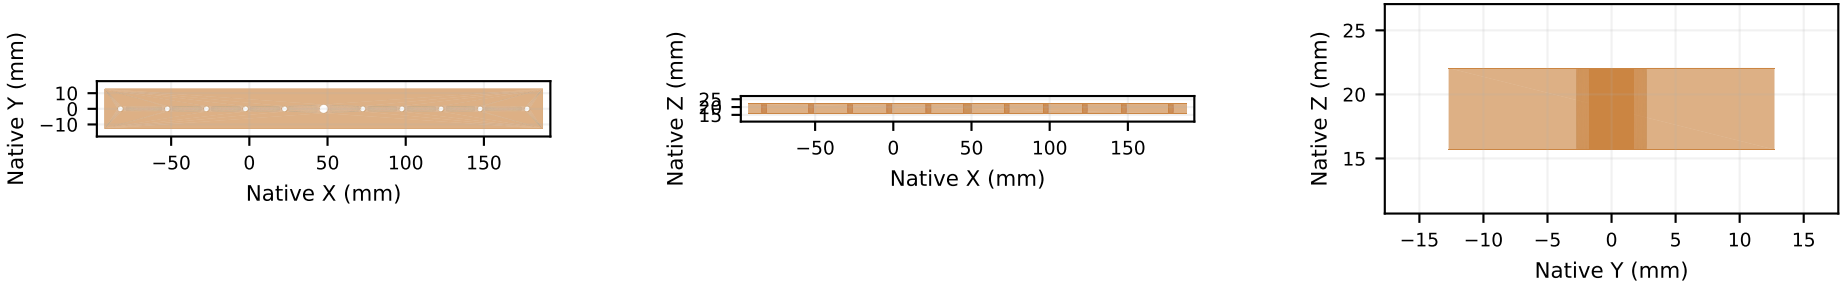

CAD units: mm. STEP is the geometric master; these projected review views are not print-to-scale templates.


Inspect the 13 mm cell seats, M5 fasteners and M3/key interface before machining. No strength qualification is implied.

PETG copies of aluminum load-path parts are fit witnesses only. Original ENPIRE interface: Wenli Xiao / NVIDIA ENPIRE.

l1 cross test arm

6061-T6 aluminum · 25.40 × 110.00 × 6.35 mm overall

20 N off-center response fixture. Use the load-cell live-end M5 attachment; ports are load locations, not a moment rating.

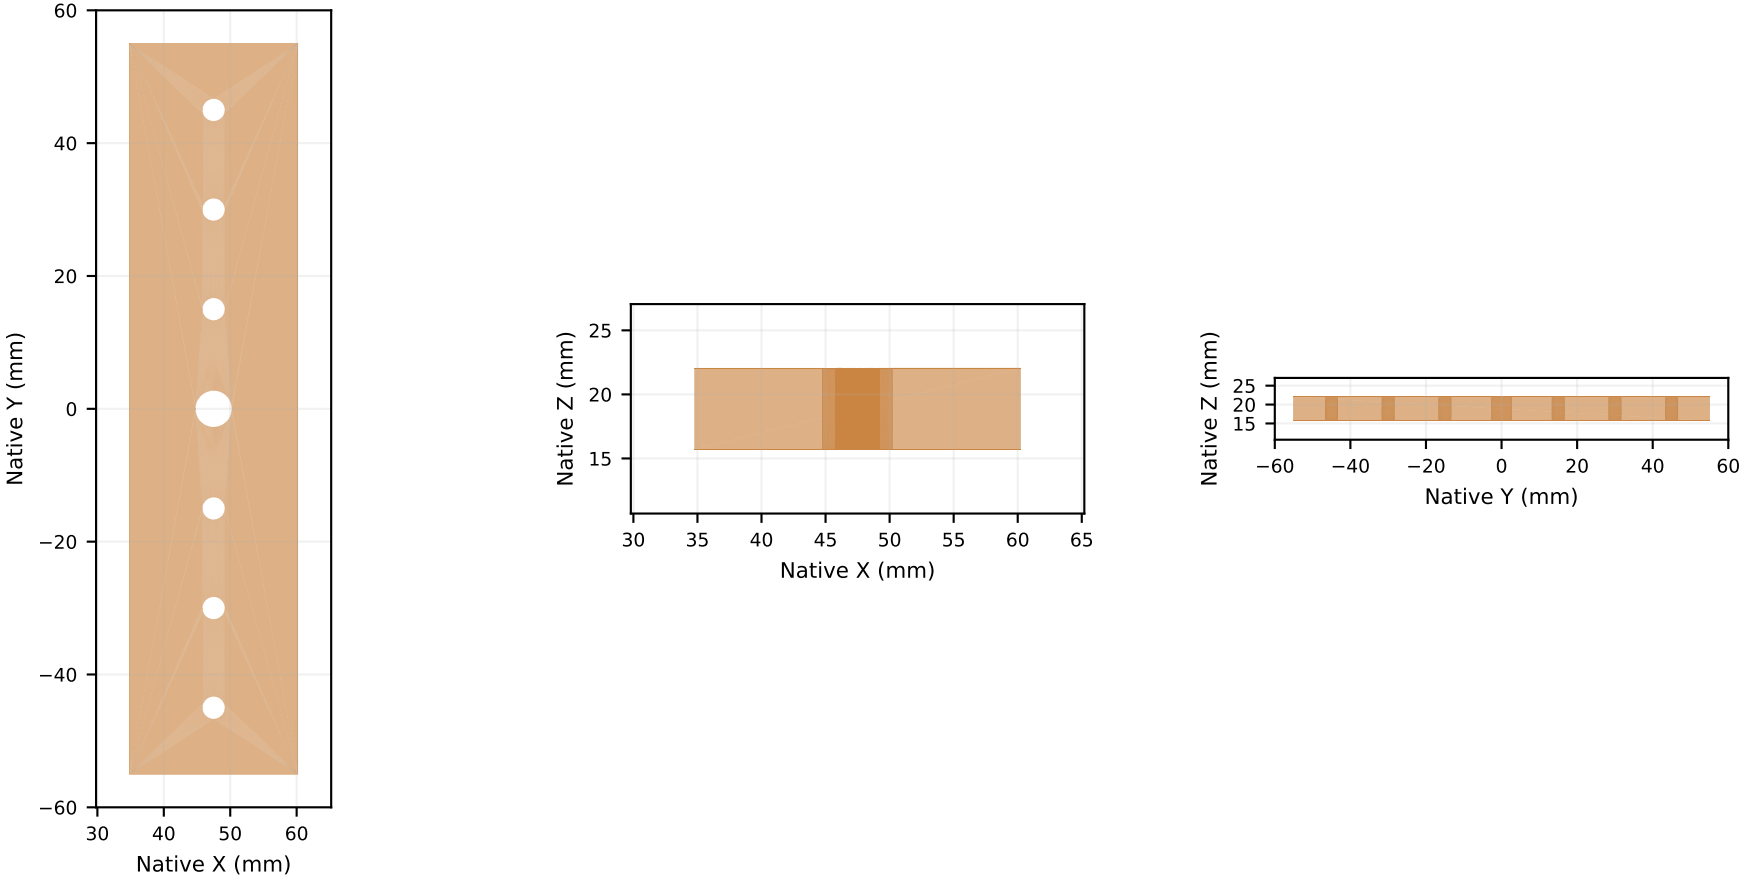

CAD units: mm. STEP is the geometric master; these projected review views are not print-to-scale templates.


Inspect the 13 mm cell seats, M5 fasteners and M3/key interface before machining. No strength qualification is implied.


PETG copies of aluminum load-path parts are fit witnesses only. Original ENPIRE interface: Wenli Xiao / NVIDIA ENPIRE.


l1 center load cap

PETG test accessory · 16.00 × 16.00 × 9.00 mm overall

Flat center-loading face over the arm's M5 screw head; test accessory.

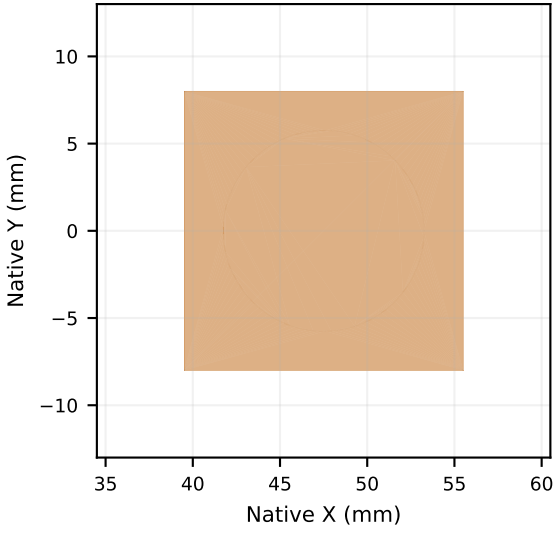

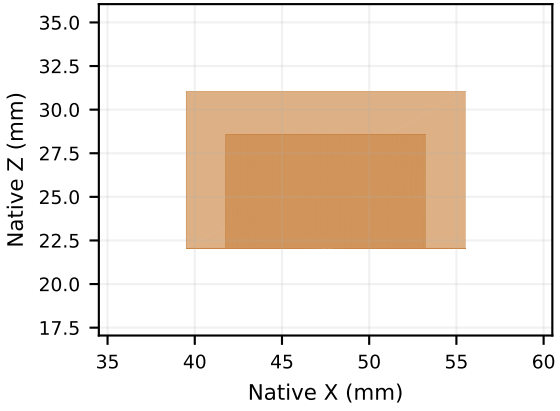

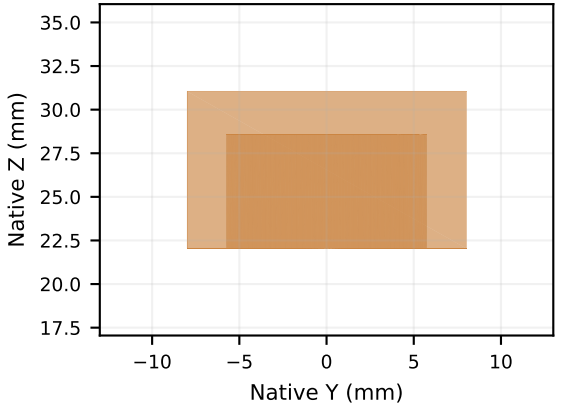

CAD units: mm. STEP is the geometric master; these projected review views are not print-to-scale templates.


Inspect the 13 mm cell seats, M5 fasteners and M3/key interface before machining. No strength qualification is implied.


PETG copies of aluminum load-path parts are fit witnesses only. Original ENPIRE interface: Wenli Xiao / NVIDIA ENPIRE.


l1 combined load plate

6061-T6 aluminum · 140.00 × 70.00 × 6.35 mm overall

Combined longitudinal/transverse moment locations enclosing the side-mounted finger's contact envelope.

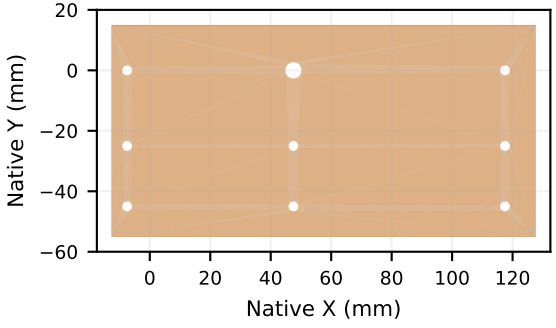

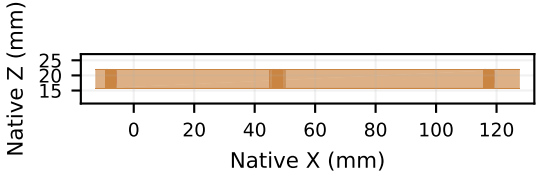

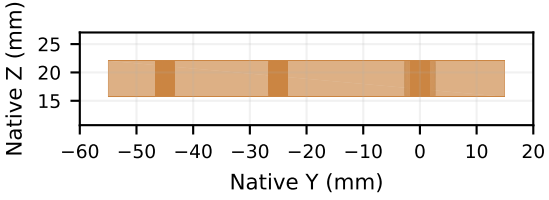

CAD units: mm. STEP is the geometric master; these projected review views are not print-to-scale templates.

Inspect the 13 mm cell seats, M5 fasteners and M3/key interface before machining. No strength qualification is implied.

PETG copies of aluminum load-path parts are fit witnesses only. Original ENPIRE interface: Wenli Xiao / NVIDIA ENPIRE.