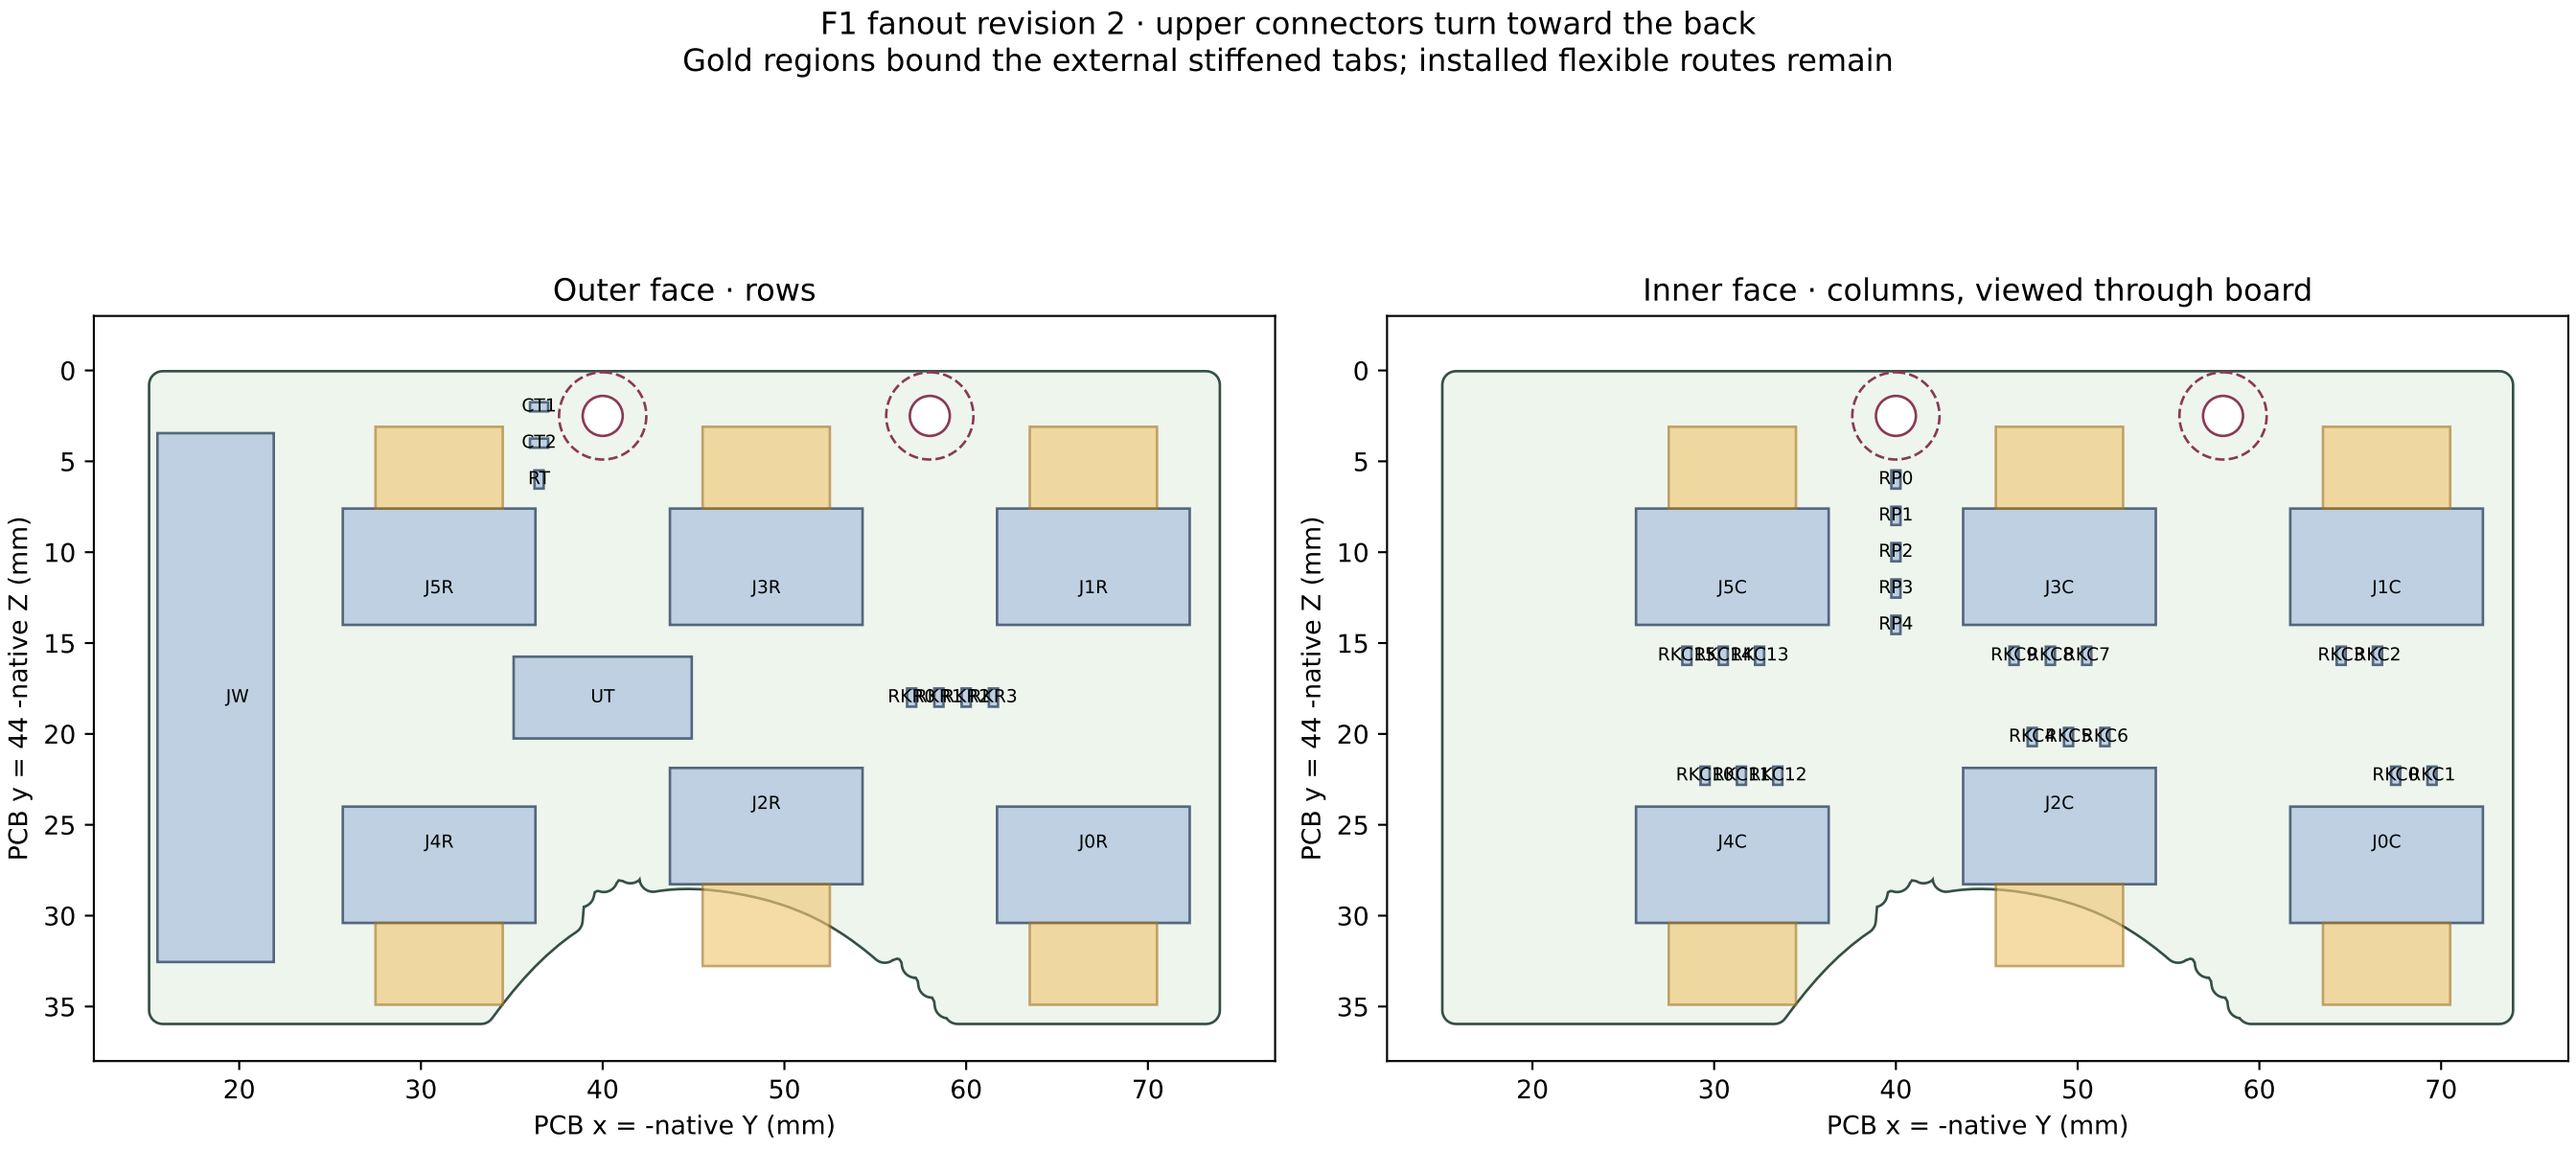
F1 fanout revision 2 · upper connectors turn toward the back
Gold regions bound the external stiffened tabs; installed flexible routes remain
Outer face · rows
Inner face · columns, viewed through board
PCB y = 44 -native Z (mm)
PCB x = -native Y (mm)
JW
J5R
J3R
J1R
UT
J2R
J4R
J0R
J5C
J3C
J1C
J2C
J4C
J0C
CT1
CT2
RT
RP0
RP1
RP2
RP3
RP4