



SC-TDE 细节 6: 六种均衡器的判决前输出


(a) 传统 DFE | BER = 0.6667

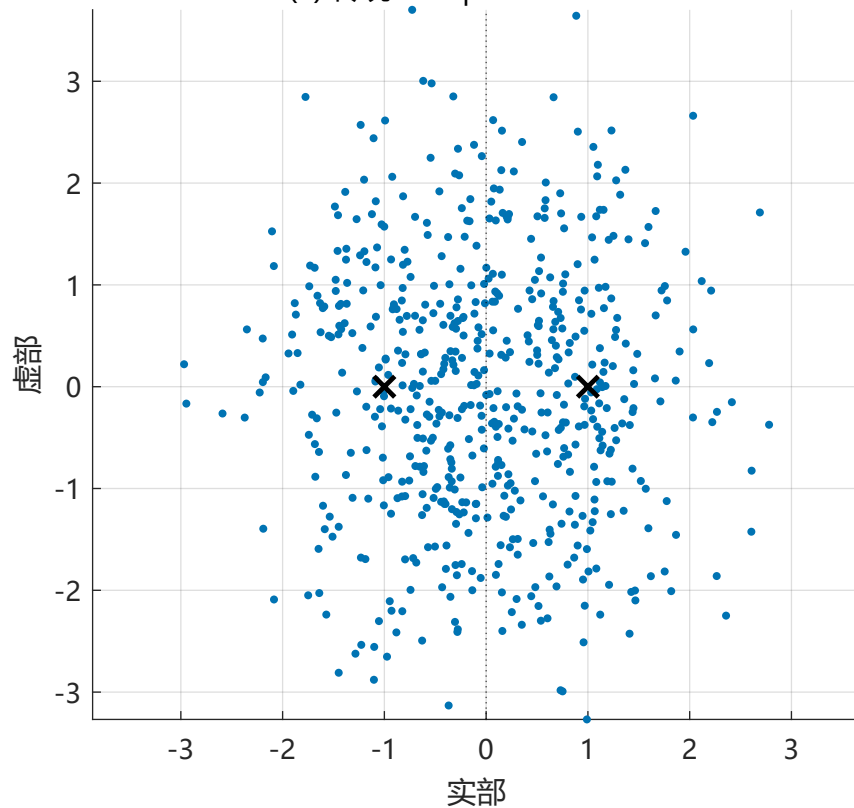


(b) 自适应 NLMS-DFE | BER = 0.009167

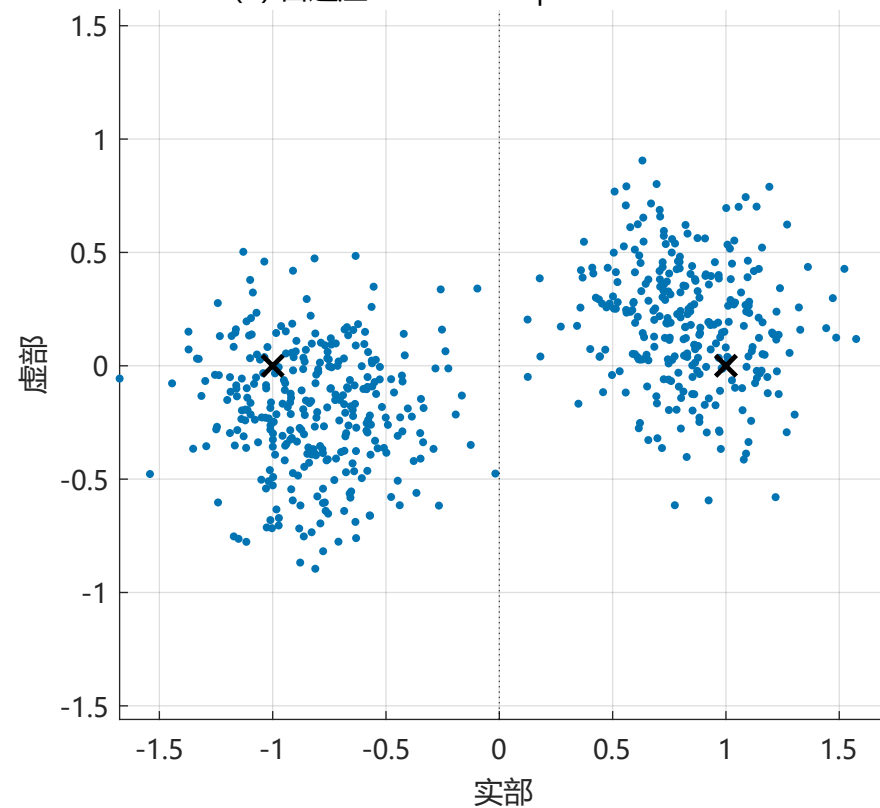


(c) PLL 辅助 DFE | BER = 0.0275

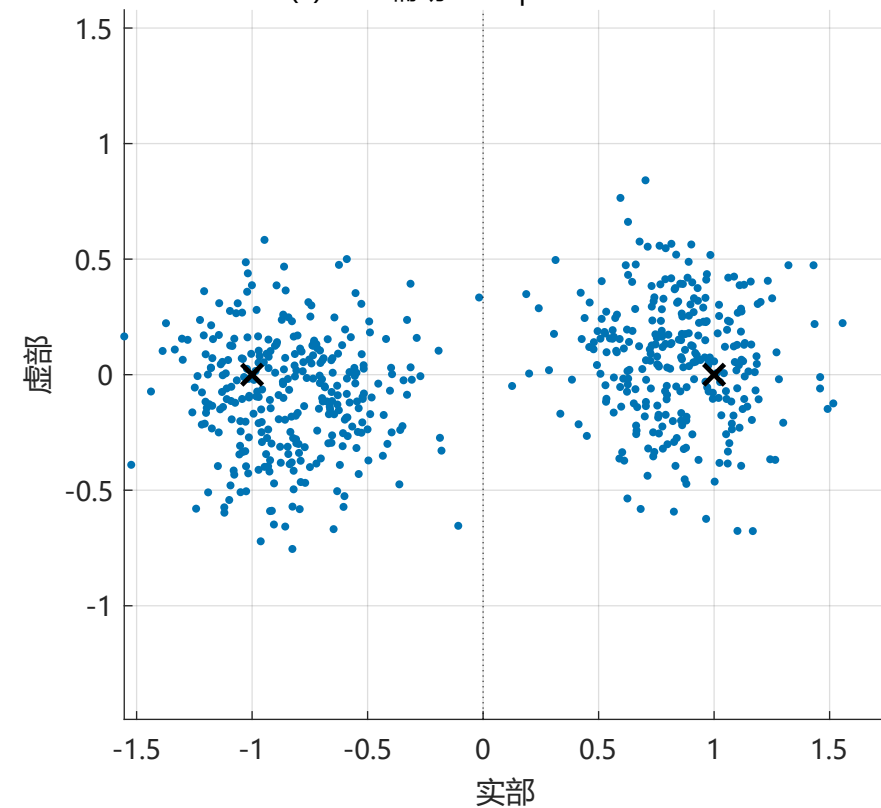

(d) 多通道 DFE | BER = 0.0275

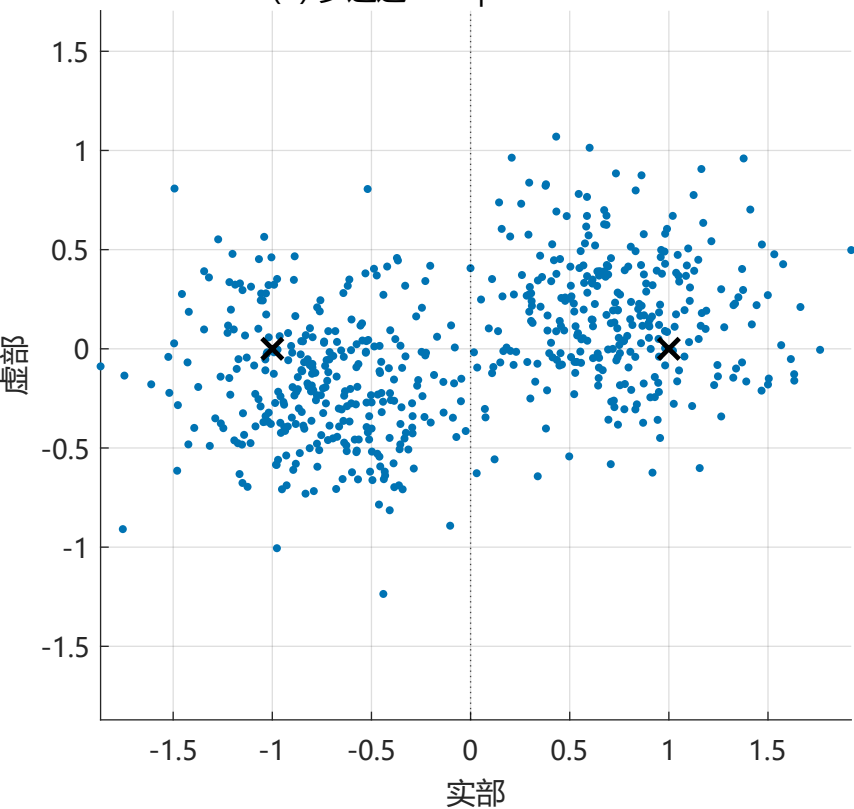

(e) 被动时反 DFE | BER = 0.6817

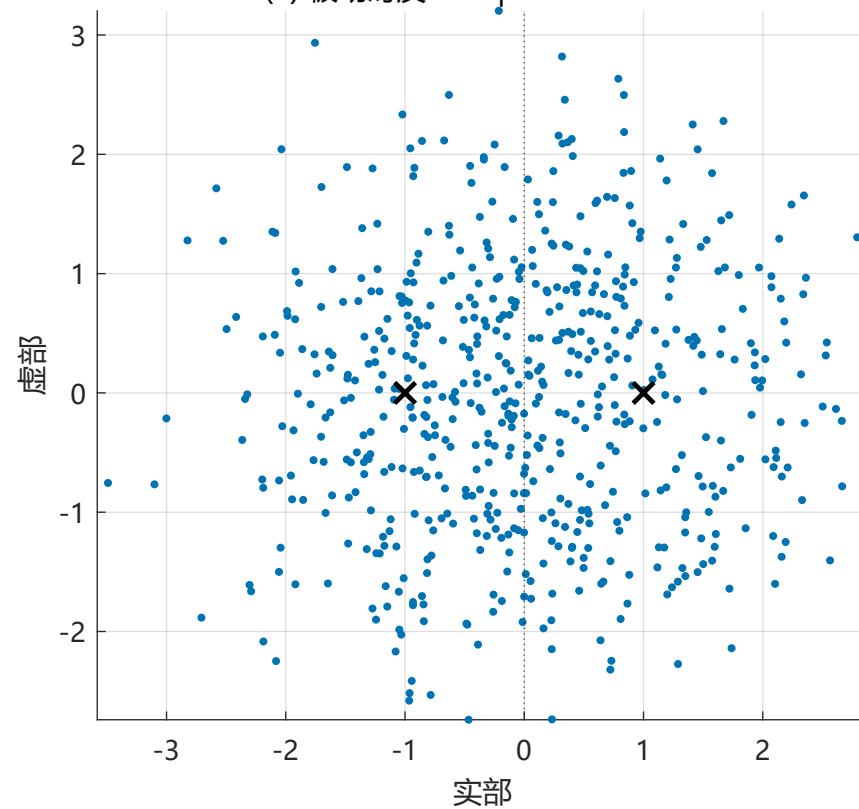

(f) 子带被动时反 DFE | BER = 0.5583

