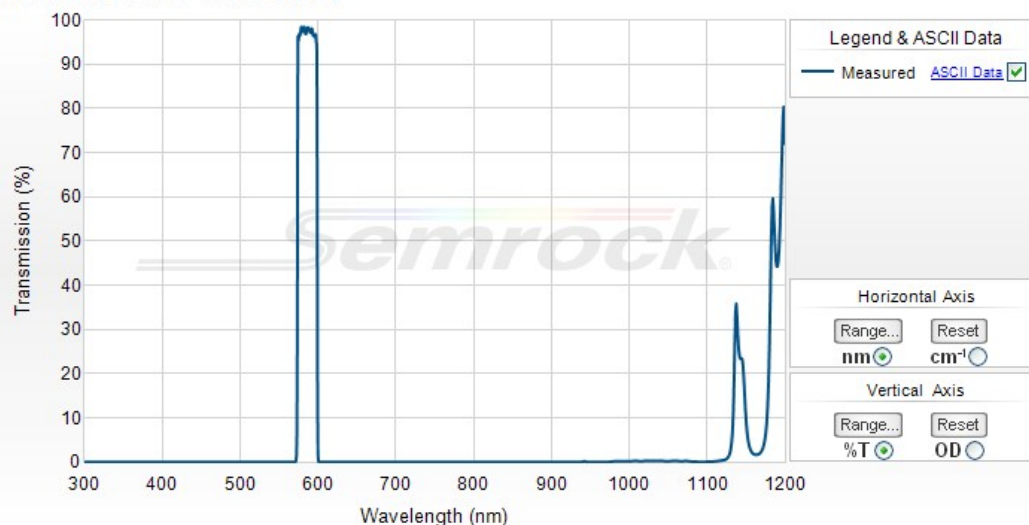


**586/20 nm BrightLine® single-band bandpass filter****Part Number: FF01-586/20-25x3.5****Semrock, Inc**3625 Buffalo Road, Suite 6  
Rochester, New York 14624Main Phone: +1 585.594.7050 (worldwide)  
Toll Free Phone: 866.736.7625 (866-SEMROCK)  
(within US and Canada)

Your filter spectrum may differ slightly from the typical spectrum above, but is certified to meet the optical specifications noted below.

**586/20 nm BrightLine® single-band bandpass filter**

Individual fluorescence bandpass filters that have been optimized for use in a variety of fluorescence instruments. All thin-film, hard-coated construction for unsurpassed performance and reliability.

Part Number	Size	Price <sup>1</sup>	Stock Status
FF01-586/20-25x3.5	25 mm x 3.5 mm	\$325	In Stock
FF01-586/20-25-STR	25 mm threaded ring for Sutter Lambda filter wheel	\$345	2nd Day Ship
FF01-586/20-25x5	25 mm x 5.0 mm	\$325	In Stock
FF01-586/20-32x3.5	32 mm x 3.5 mm	\$532	2nd Day Ship
FF01-586/20-32x5	32 mm x 5.0 mm	\$532	2nd Day Ship
FF01-586/20-21.8-D	21.8 mm x 2.0 mm (unmounted)	\$325	2nd Day Ship
FF01-586/20-23.3-D	23.3 mm x 2.0 mm (unmounted)	\$325	2nd Day Ship

Don't see a size you need? Contact us for custom sizing – delivery confirmed ARO (sizing fee applies).

1) US domestic pricing only. If you are ordering from outside the US, please contact your nearest [regional distributor](#) for the correct list price.**Optical Specifications**

Specification	Value
Transmission Band 1	T <sub>avg</sub> > 93% 576 – 596 nm
Center Wavelength 1	586 nm
Guaranteed Minimum Bandwidth 1	20 nm
FWHM Bandwidth 1 (nominal)	25.9 nm
Blocking Band 1	OD <sub>avg</sub> > 5 200 – 564 nm
Blocking Band 2	OD > 3.5 604 nm
Blocking Band 3	OD <sub>avg</sub> > 10 612 – 644 nm (Design specification - <a href="#">measurements are noise-floor limited</a> )
Blocking Band 4	OD <sub>avg</sub> > 5 644 – 700 nm
Blocking Band 5	OD <sub>avg</sub> > 4 700 – 925 nm
Blocking Band 6	OD <sub>avg</sub> > 2 925 – 1100 nm

**General Filter Specifications**

Specification	Value
Angle of Incidence	0 ± 5 degrees
Cone Half-angle	7 degrees
Optical Damage Rating	Testing has proven to show no signs of degradation when exposed to at least 6.0 W of power from an unfiltered xenon arc lamp over a 25 mm diameter (corresponding to 1.2 W/cm <sup>2</sup> ) for over 500 hrs.
Filter Effective Index	1.70 Understanding 'Effective Index of Refraction' page

**Physical Filter Specifications (applies to standard sized parts; contact us regarding other sizes)**

Specification	Value
Transverse Dimensions (Diameter)	25 mm
Transverse Tolerance (mounted)	+ 0.0 / - 0.1 mm
Filter Thickness (Mounted)	3.5 mm
Filter Thickness 2 (Mounted)	5.0 mm
Filter Thickness Tolerance (Mounted)	± 0.1 mm
Clear Aperture	≥ 22 mm (3.5 mm thickness) or ≥ 21 mm (5.0 mm thickness)
Scratch-Dig	60-40
Substrate Thickness (unmounted)	2.0 mm
Substrate Thickness Tolerance (unmounted)	± 0.1 mm
Orientation	Arrow on ring indicates preferred direction of propagation of light