

M102T91 e-Paper Mainboard V1.1

ocurement review before Gerber release. Net names are frozen per the V1.1 design document.


M-1-N16R8 core, reset, boot, keys, I2C pull-ups

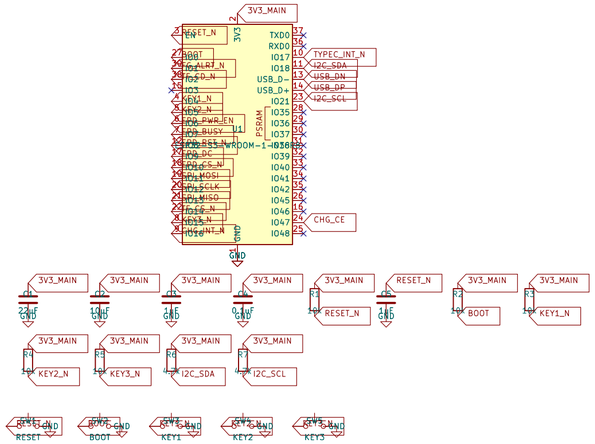


03 BQ25895 NVDC charger / power path (/CE defaults HIGH = charge disabled)




05 TPS63070 3V3 buck-boost (VOUT8 = Passive, no power-output clash)




04 Battery inputs (either or both) + MAX17048 fuel gauge

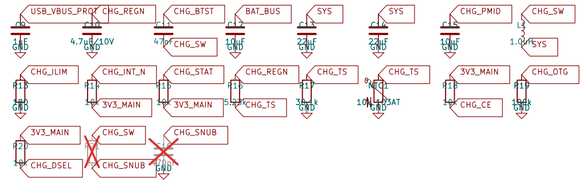


06 EPD GDEM102T91 24P FPC + SSD1677 HV network (locked to panel typical application circuit)

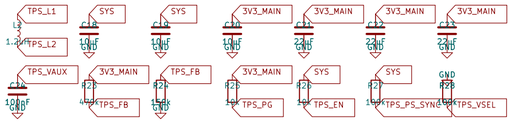


VBUS protection, TUSB320LI current advertisement

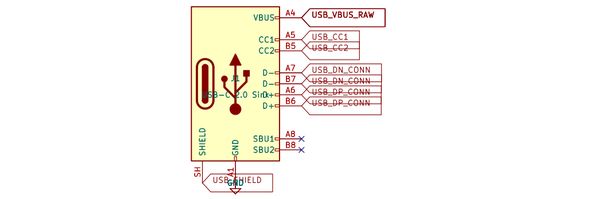

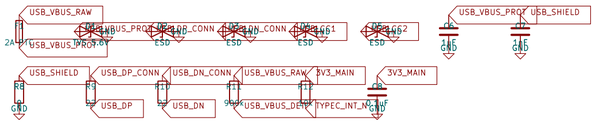



07 MicroSD (SPI, shared SCLK/MOSI with EPD, independent CS)





08 PWR_FLAG (no test points on this revision)










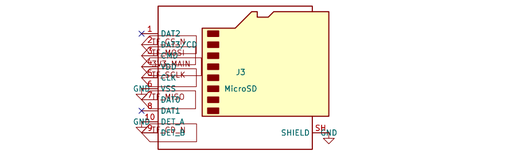



EPDF Hardware	
Sheet: /	
File: esp32-board-v1.1.kicad_sch	
Title: ESP32-S3 GDEM102T91 Mainboard	
Size: A2	Date: 2026-09-10
KiCad E.D.A. 10.0.5	Id: 1/1

Rev: V1.1