



NOTES: (UNLESS OTHERWISE SPECIFIED)

1. SPECIFICATIONS AND DOCUMENTS:
1.1. PANEL CONSTRUCTION SHALL BE IAW OH-SPEC-001, PANEL TYPE A, METHOD 1.
1.2. ELECTRICAL CONNECTIONS SHALL BE IAW OH-INTERCONNECT.
2. ALL ITEMS NOT EXPLICITLY DEFINED IN THIS DRAWING ARE DEFINED BY THE MASTER CAD MODELS.
ALL DIMENSIONS NOT DEFINED ON THIS DRAWING ARE CONTAINED WITHIN THE FOLLOWING MANUFACTURING FILES:
2.2. FLAT PARTS: <MATERIAL> <MATERIAL COLOR, IF APPLICABLE> <THICKNESS, IN DECIMAL INCHES> <PN> <DESCRIPTION> <REV>_V<VERSION NUMBER OF MODEL>.SVG
2.3. FDM 3D PRINTED PARTS: FDM_<PN>_<DESCRIPTION>_<REV>_V<VERSION # OF MODEL>.3MF
3. FN 8, 9, 18 & 19 ARE INCLUDED WITH THEIR RESPECTIVE SWITCHES, AND SHOULD NOT BE ORDERED SEPARATELY.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	5/1/2023	

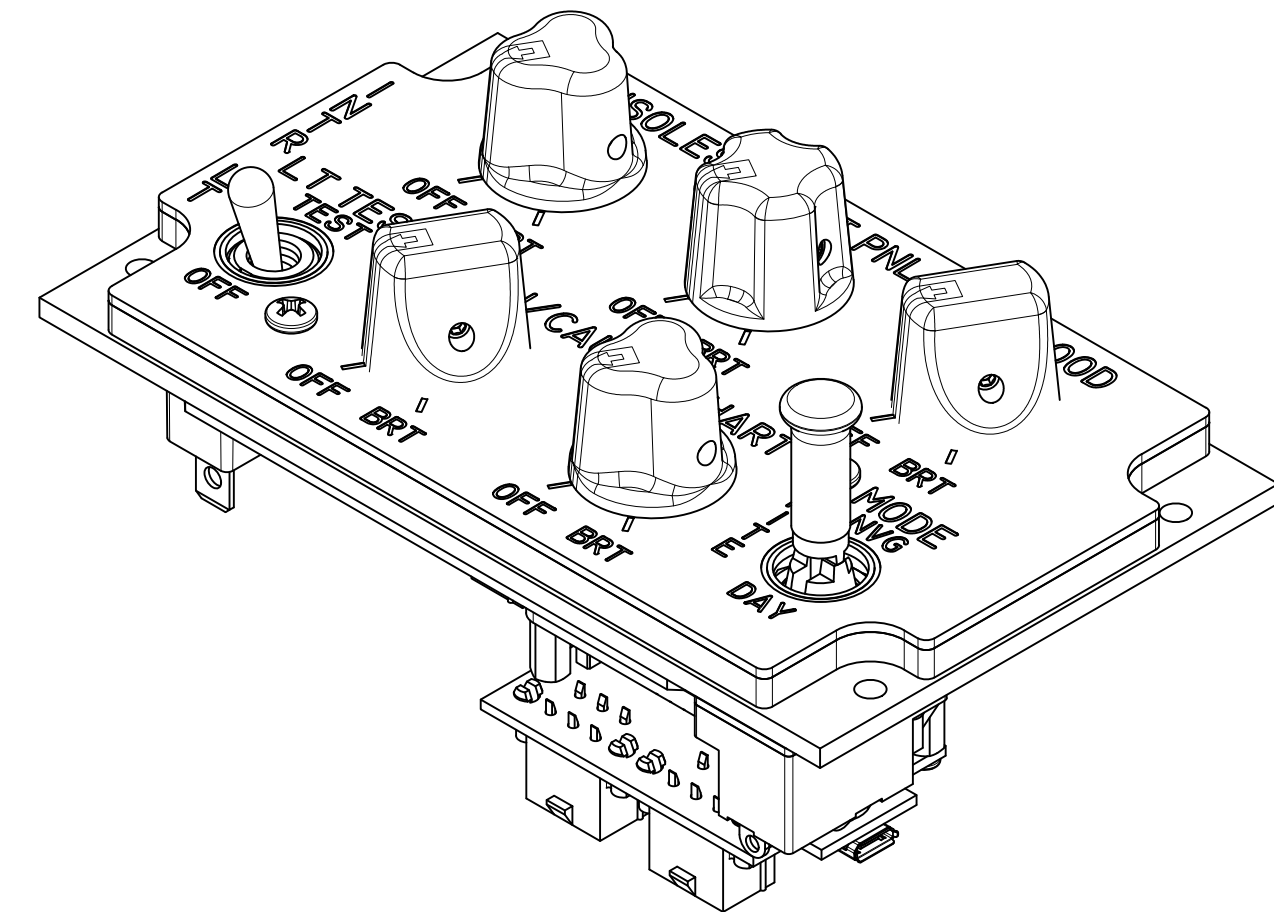

-1 ISO

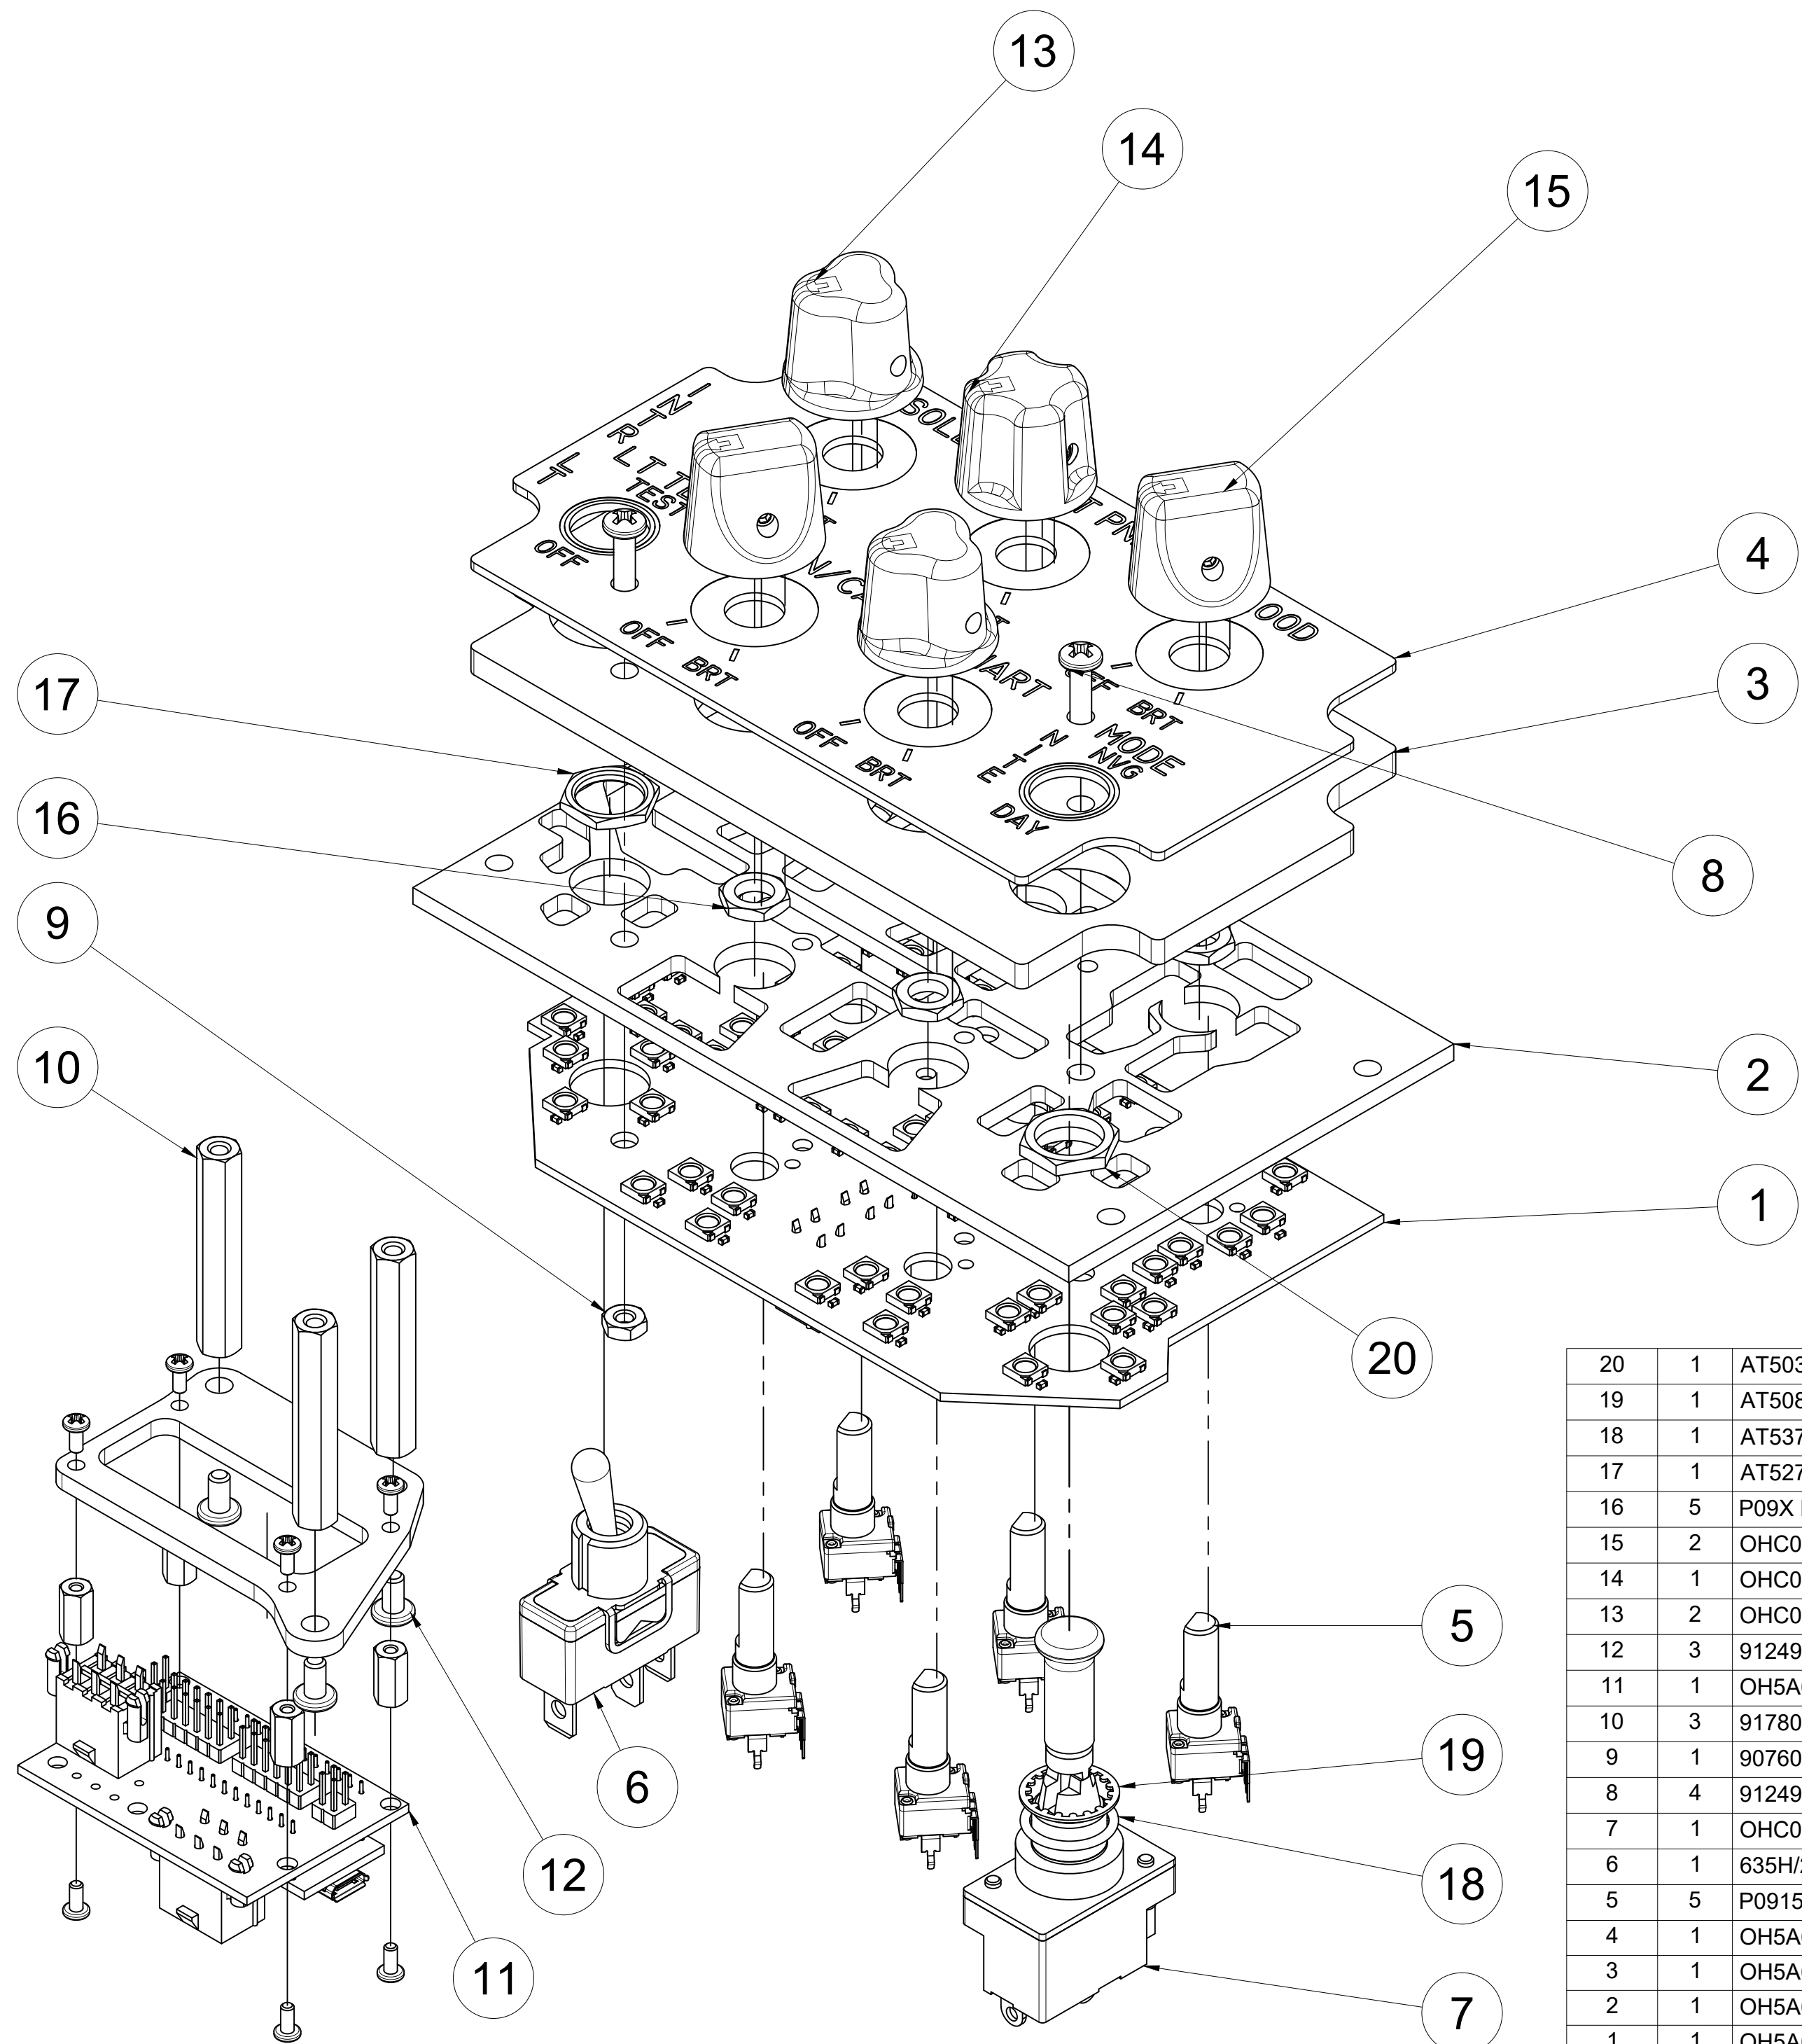

-1 ASSY
SCALE 1.2:1

20	1	AT503M	HEX NUT FOR SWITCH, M12-1	SS
19	1	AT508	LOCK WASHER FOR SWITCH, M12	SS
18	1	AT537	O-RING FOR SWITCH, 12 MM ID	RBR
17	1	AT527M	----	STL
16	5	P09X NUT	HEX NUT FOR POTENTIOMETER, M7X0.75	BRS
15	2	OHC0003-A-385FGB4	ASSY, KNOB, GREY, .25 D-SHAFT	----
14	1	OHC0003-A-385BGB4	ASSY, KNOB, GREY, .25 D-SHAFT	----
13	2	OHC0003-A-385EGB4	ASSY, KNOB, GREY, .25 D-SHAFT	----
12	3	91249A144	PHS, 6-32 X .250, 18-8, BLACK-OXIDE	SS
11	1	OH5A6A1-100	ASSY, INTR LT ABSIS MODULE	----
10	3	91780A337	STANDOFF, HEX, FEMALE, 6-32 X 1.50L X .25 HEX, ALUM	ALU
9	1	90760A007	NUT, 6-32, JAM, STEEL, ZINC-PLATED	STL
8	4	91249A151	PHS, 6-32 X .625, 18-8, BLACK-OXIDE	SS
7	1	OHC0001-6	ASSY, SWITCH, S3AL, TALL BAT	----
6	1	635H/2	SWITCH, TOGGLE, ON-MOM, REGULAR BAT	N/A
5	5	P0915N-FC20BR10K	POTENTIOMETER, 9MM ROTARY, PANEL MOUNT	N/A
4	1	OH5A6A1-12	INTR LT LEGEND PLATE	RMRK
3	1	OH5A6A1-11	INTR LT LIGHTPLATE	ACRL
2	1	OH5A6A1-10	INTR LT BACKPLATE	ACRL
1	1	OH5A6A1-13	PCB, INTR LT	N/A
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL

UNLESS OTHERWISE SPECIFIED:		UOS INCH TOLERANCES ARE:	
DIMENSIONS ARE IN INCHES. DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS. INTERPRET DRAWING IAW ASME Y14.100-2017. INTERPRET DIM AND TOL IAW ASME Y14.5-2009. REMOVE ALL BURRS AND SHARP EDGES TO .05 MAX. DIMENSIONS APPLY BEFORE FINISH.		DECIMALS: .X ± .1 .XX ± .03 .XXX ± .010	ANGLES: MACHINED ± 5° LOCATING ± 5° FORMED ± 2° CHAMFERS ± 5°
DRILLED HOLE DIAMETERS: .0135 - .125: +.004/- .001 .126 - .250: +.005/- .001 .251 - .500: +.006/- .001 .501 - .750: +.008/- .001 .751 - 1.000: +.010/- .001 1.001 - 2.000: +.012/- .001			
DESIGNED	J. STEENSEN	5/1/2023	
CHECKED	J. STEENSEN	5/1/2023	
DRAWN	B. LAZARUS	5/1/2023	
SIZE	D	DWG NO	OH5A6A1-1
SCALE	1:1	DO NOT SCALE DWG	SHEET 1/1



ASSY, INTR LT PANEL

RIGHT CONSOLE