

# Q.TRON CLASSIC



**440 - 455 Wp | 96 Cells**  
**22.8% Maximum Module Efficiency**

**MODEL** Q.TRON S-G3R.12+ / BFG



Q.ANTUM  
**NEO**

## High performance Qcells N-type solar cells

Q.ANTUM NEO solar cell technology with optimized module layout boosts module efficiency up to 22.8%.



## A reliable investment

Inclusive 25-year product warranty and improved 30-year linear performance warranty<sup>1</sup>.



## Enduring high performance

Long-term yield security with Anti LeTID Technology, Anti PID Technology<sup>2</sup>, Hot-Spot Protect.



## Extreme weather rating

High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (2400 Pa).



## Innovative all-weather technology

Optimal yields, whatever the weather with excellent low-light and temperature behaviour.



## Far beyond the standard

Qcells' comprehensive quality program ensures high long-term yields and the reliability of your solar system.

<sup>1</sup> See data sheet on rear for further information.

<sup>2</sup> APT test conditions according to IEC/TS 62804-1:2015, method A (-1500 V, 96 h)

## THE IDEAL SOLUTION FOR:



Rooftop arrays on  
residential buildings



# Q.TRON CLASSIC

## Mechanical Specification

Format	1762 mm × 1134 mm × 30 mm (including frame)
Weight	20.9 kg
Front Cover	1.6 mm thermally pre-stressed glass with anti-reflection technology
Back Cover	1.6 mm semi-tempered glass
Frame	Black anodised aluminium
Cell	6 × 16 monocrystalline Q.ANTUM NEO solar half cells
Junction box	53-67 mm × 28 mm × 17 mm Protection class IP68, with bypass diodes
Cable	4 mm <sup>2</sup> Solar cable; (+) ≥1265 mm, (-) ≥1265 mm
Connector	Stäubli MC4-Evo2A; IP68

## Electrical Characteristics

Power Class				440	445	450	455
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC <sup>1</sup> (POWER TOLERANCE +5 W/ -0 W)							
Minimum	Power at MPP <sup>1</sup>	P <sub>MPP</sub>	[W]	440	445	450	455
	Short Circuit Current <sup>1</sup>	I <sub>SC</sub>	[A]	15.89	15.92	15.95	15.98
	Open Circuit Voltage <sup>1</sup>	V <sub>OC</sub>	[V]	35.35	35.55	35.75	35.95
	Current at MPP	I <sub>MPP</sub>	[A]	14.83	14.87	14.91	14.95
	Voltage at MPP	V <sub>MPP</sub>	[V]	29.67	29.93	30.19	30.44
	Efficiency <sup>1</sup>	η	[%]	≥22.0	≥22.3	≥22.5	≥22.8

Bifaciality of P<sub>MPP</sub> and I<sub>SC</sub> 80% ±10% • Bifaciality given for rear side irradiation on top of STC (front side) • According to IEC 60904-1-2


<sup>1</sup>Measurement tolerances P<sub>MPP</sub>, I<sub>SC</sub>, V<sub>OC</sub> ±3% at STC: 1000 W/m<sup>2</sup>, 25 ±2°C, AM 1.5 according to IEC 60904-3

MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT<sup>2</sup>

Minimum	Power at MPP	P <sub>MPP</sub> [W]	332	336	340	344
	Short Circuit Current	I <sub>SC</sub> [A]	12.83	12.85	12.88	12.90
	Open Circuit Voltage	V <sub>OC</sub> [V]	33.65	33.84	34.03	34.22
	Current at MPP	I <sub>MPP</sub> [A]	11.97	12.01	12.04	12.07
	Voltage at MPP	V <sub>MPP</sub> [V]	27.74	27.98	28.24	28.51


<sup>2</sup>800 W/m<sup>2</sup>, NMOT, spectrum AM 1.5

### Qcells performance warranty

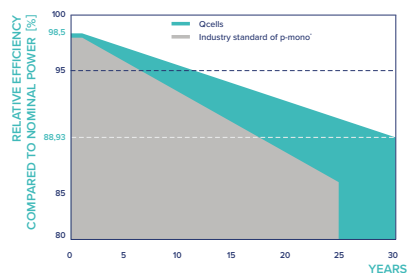

\*Standard terms of guarantee for the 5 PV companies with the highest production capacity in 2021 (February 2021)

### Performance at low irradiance

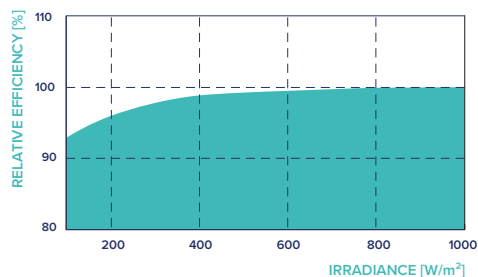

### Temperature Coefficients

Temperature Coefficient of I <sub>SC</sub>	α	[%/K]	+0.04	Temperature Coefficient of V <sub>OC</sub>	β	[%/K]	-0.24
Temperature Coefficient of P <sub>MPP</sub>	γ	[%/K]	-0.28	Nominal Module Operating Temperature	NMOT	[°C]	45 ± 2

## Properties for System Design

Maximum System Voltage	V <sub>sys</sub>	[V]	1500	PV module classification	Class II
Maximum Reverse Current	I <sub>R</sub>	[A]	30	Fire Rating based on ANSI/UL 61730	C
Max. Design Load, Push/Pull		[Pa]	3600/1600	Permitted Module Temperature on Continuous Duty	-40°C - +85°C
Max. Test Load, Push/Pull		[Pa]	5400/2400		

## Qualifications and Certificates

TÜV NORD;  
IEC 61215:2016;  
IEC 61730:2016.  
This data sheet complies  
with DIN EN 50380.



Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.

Hanwha Q CELLS GmbH Sonnenallee 17-21, 06766 Bitterfeld-Wolfen, Germany | TEL +49 (0)3494 66 99-23444 | FAX +49 (0)3494 66 99-23000 | E-MAIL sales@q-cells.com | WEB www.qcells.com

qcells