Features:

1. The product is compact and small

2. Programmable square wave output

3. Storage chip: AT24C32 (storage capacity 32K)

4. Easy to use

5. Widely applicable

Product Parameters:

1. Size: 38mm (length) * 22mm (width) * 14mm (height) 2. Operating voltage: 3.3-5.5V

3. Clock chip: high-precision clock chip DS3231

4. Clock accuracy: within the ambient temperature range of O-40 ° C, with an accuracy of 2ppm and an annual error of about 1 minute. 5. Comes with 2 calendar alarms

6. Programmable square wave output

7. Real time clock generates timing for seconds, minutes, hours, weeks, dates, months, and years, and provides leap year compensation valid until 2100

8. The chip comes with a built-in temperature sensor with an accuracy of ± 3 ℃

9. Storage chip: AT24C32 (storage capacity 32K)

10. IIC bus interface, maximum transmission speed 400KHZ (when working at 5V)

11. Other C devices can be cascaded, and the 24C32 address can be modified by short circuiting A0/A1/A2, with the default address

For 0x57

12. The module is available in two specifications: with battery (HW-084B) and without battery (HW-084A)

Product List:

1 * Module

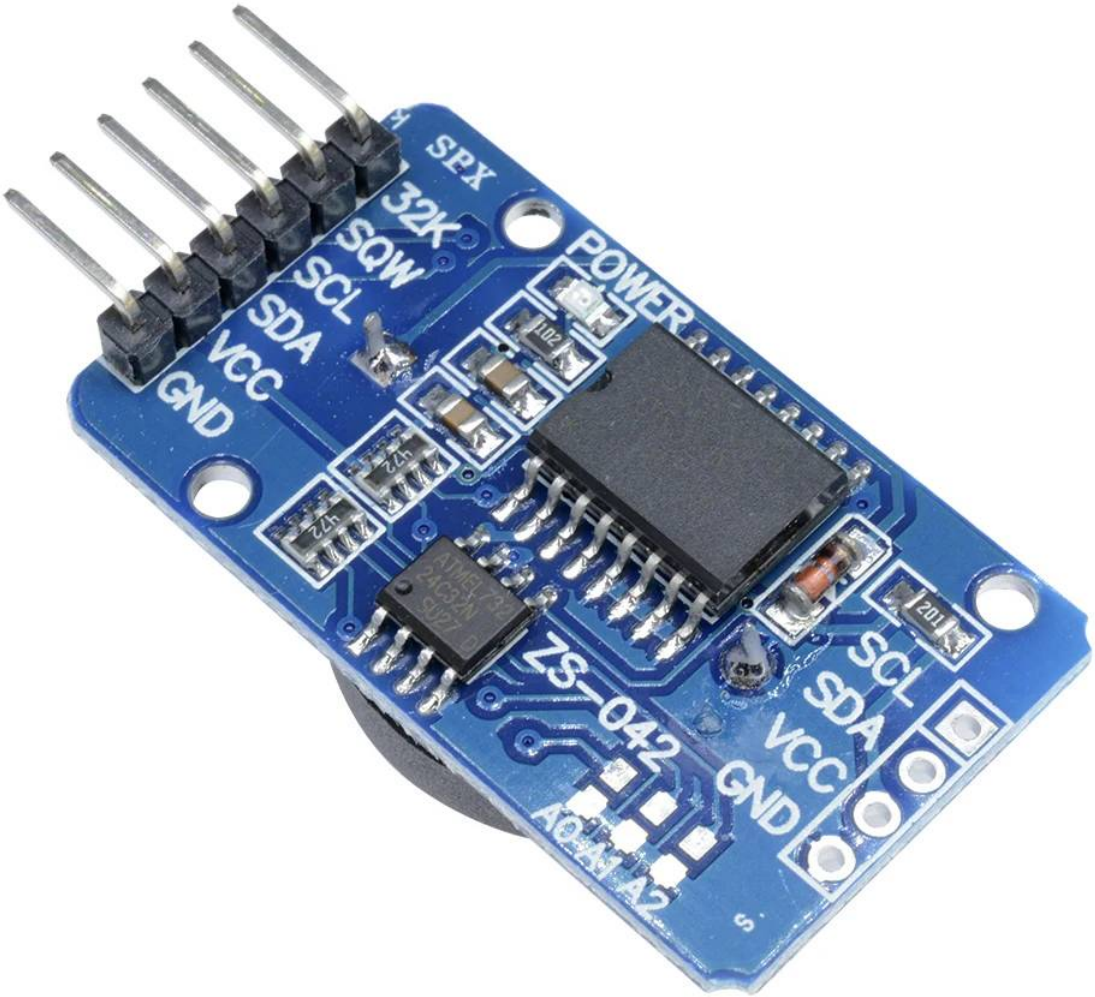
SPX
32K
SQW
SCL
SDA
VCC
GND
POWER
ZS-042
SCL
SDA
VCC
GND
A0
A1
A2

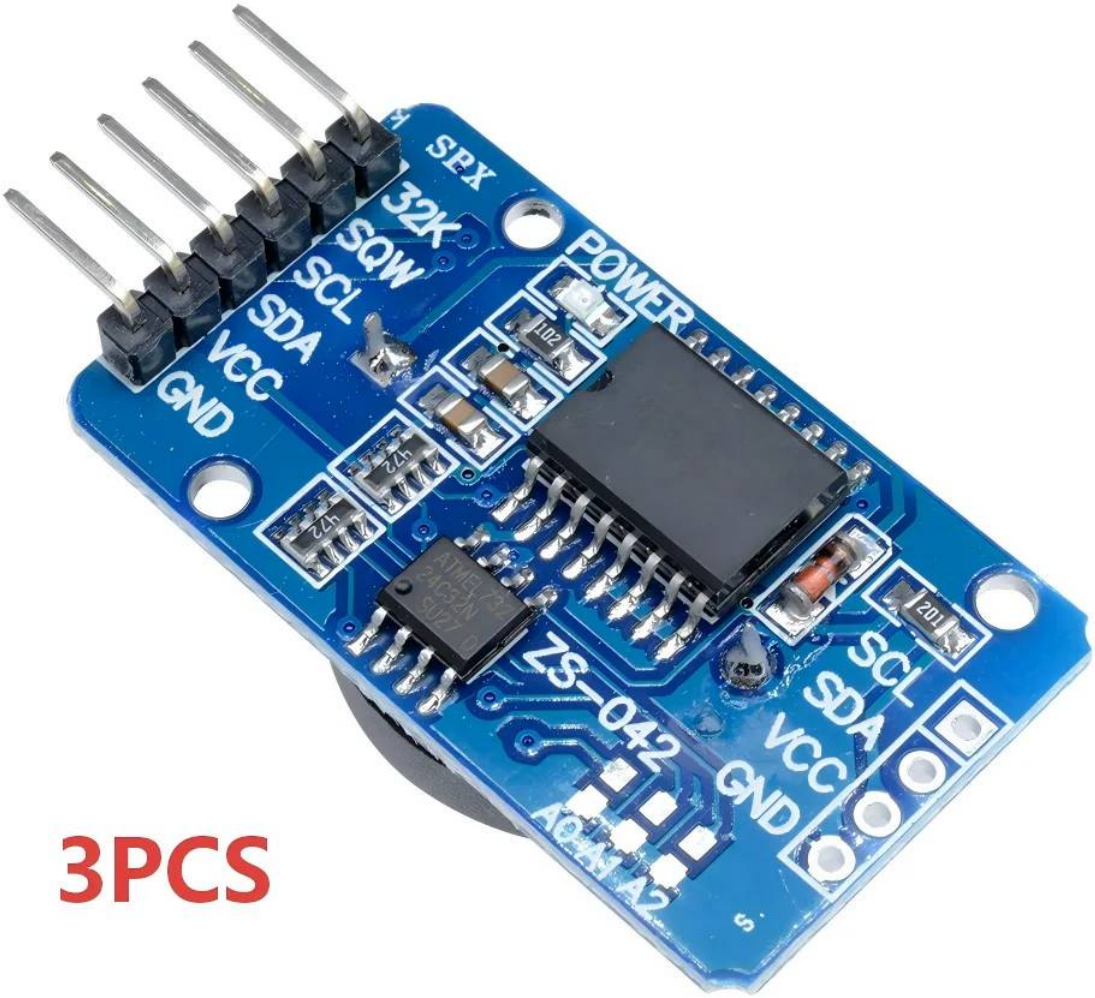

3PCS

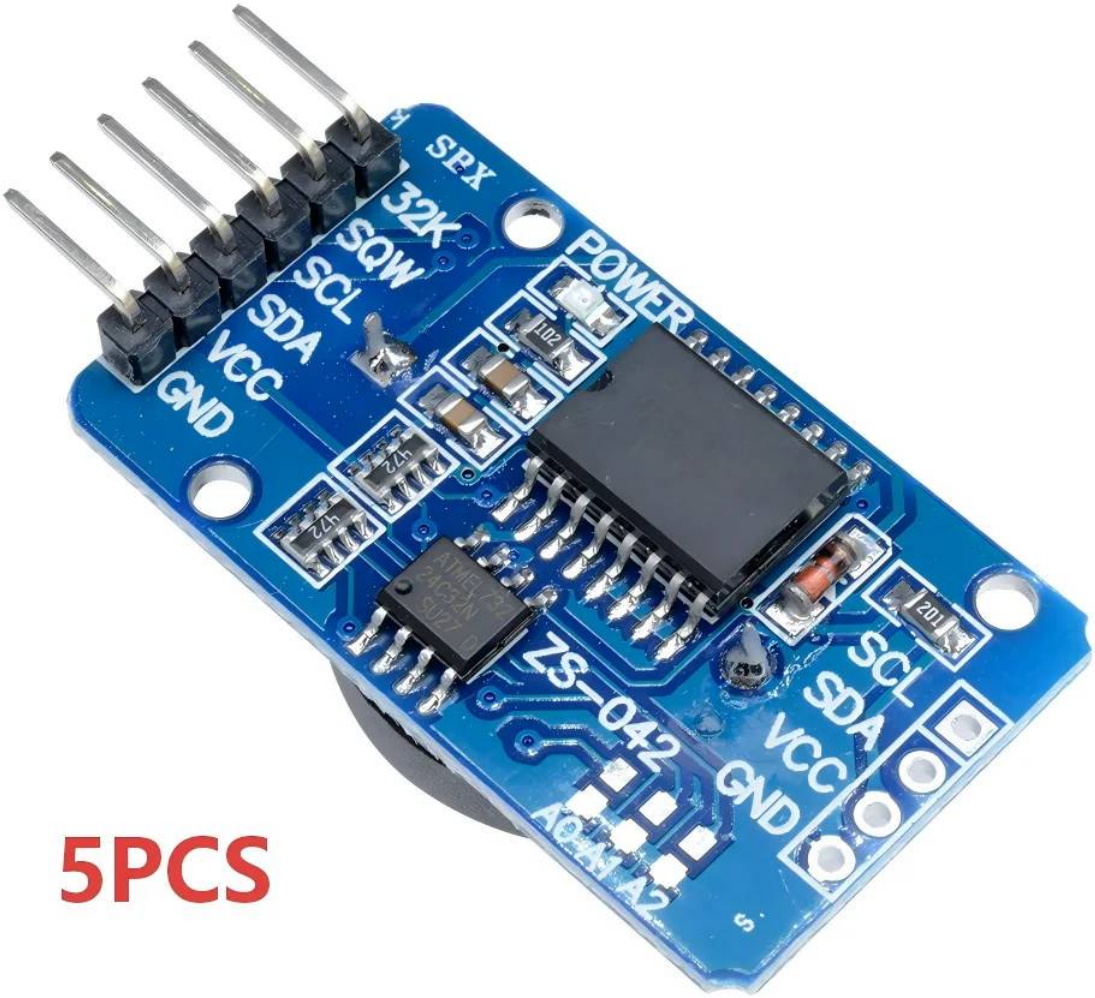

5PCS

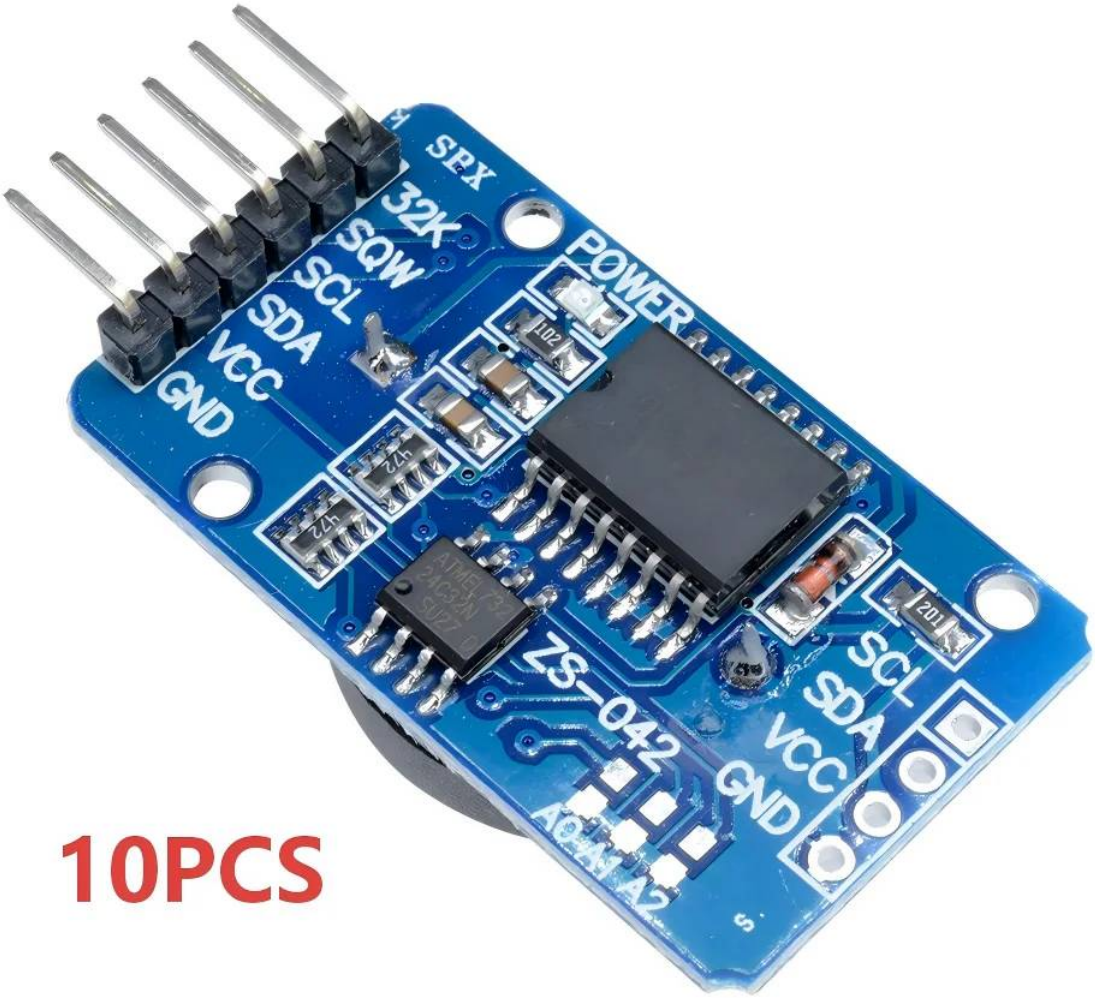

10PCS

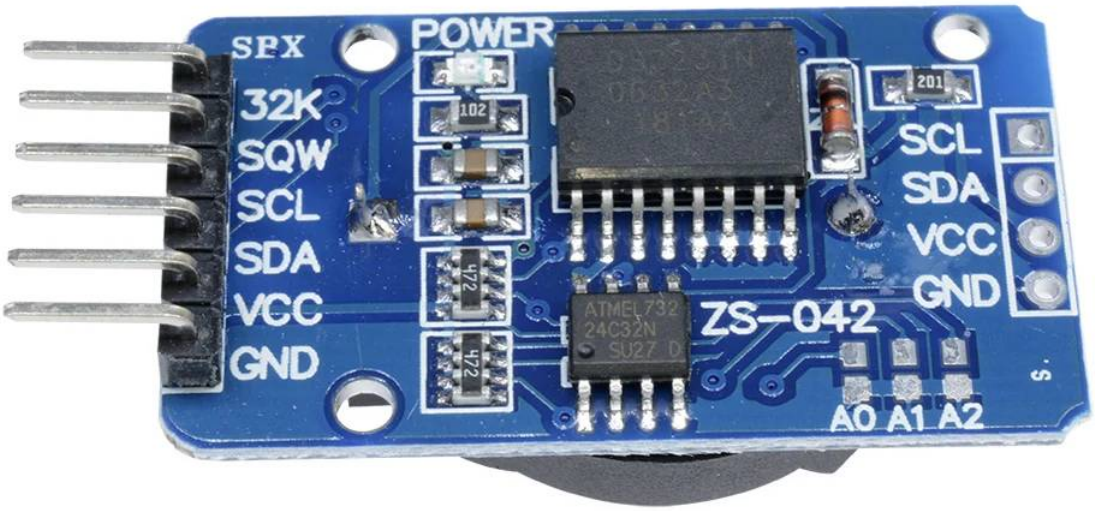
POWER
32K
SQW
SCL
SDA
VCC
GND
SCL
SDA
VCC
GND
ZS-042
A0 A1 A2
ATMEL732
24C32N
102
472
472
201

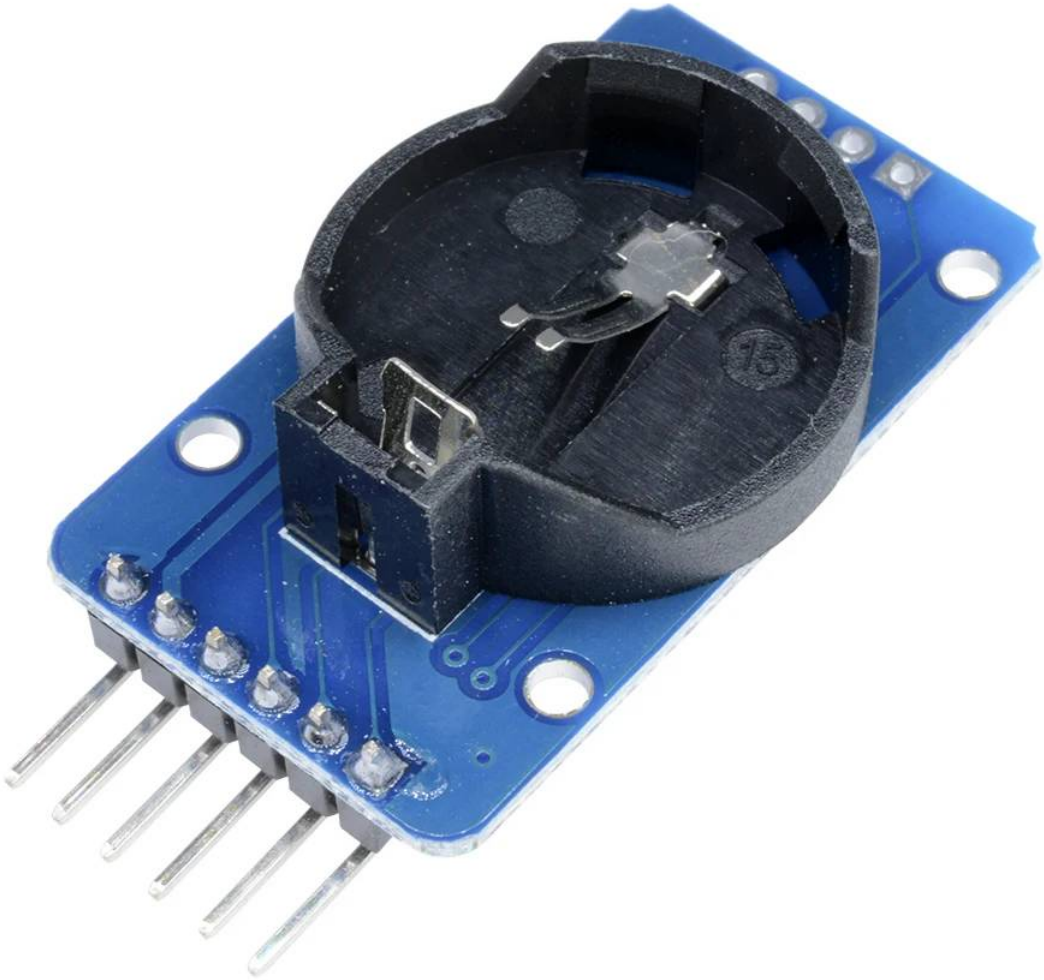

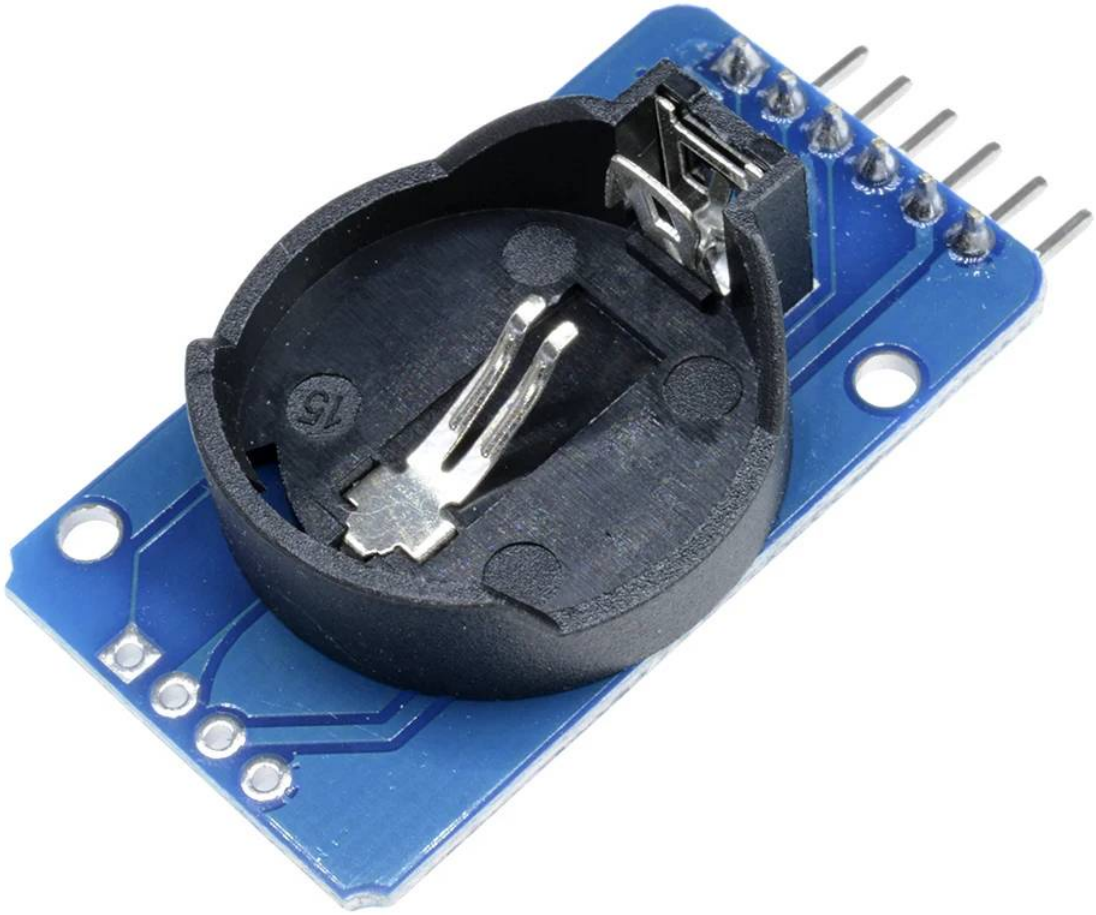

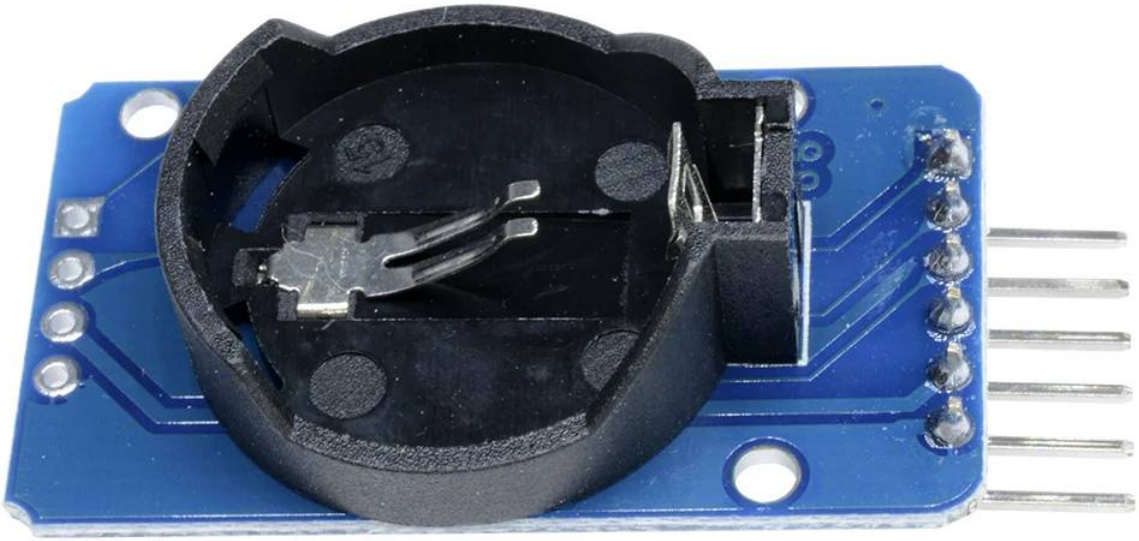

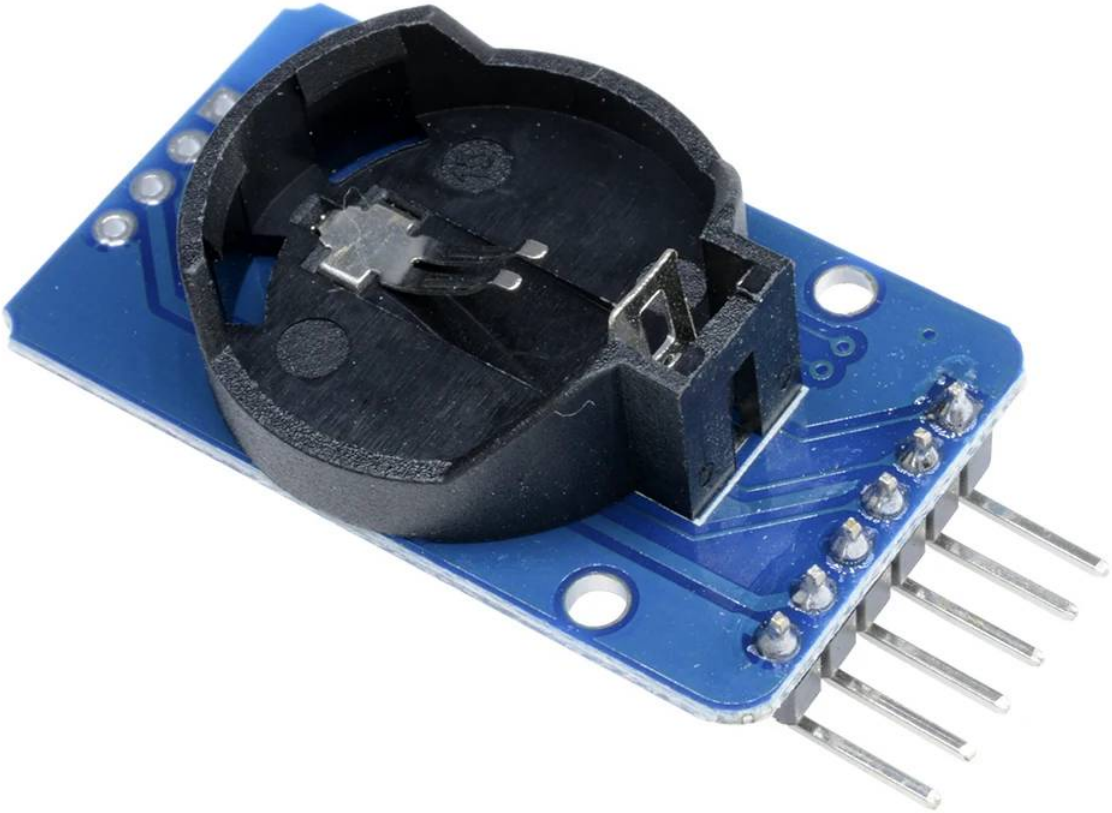

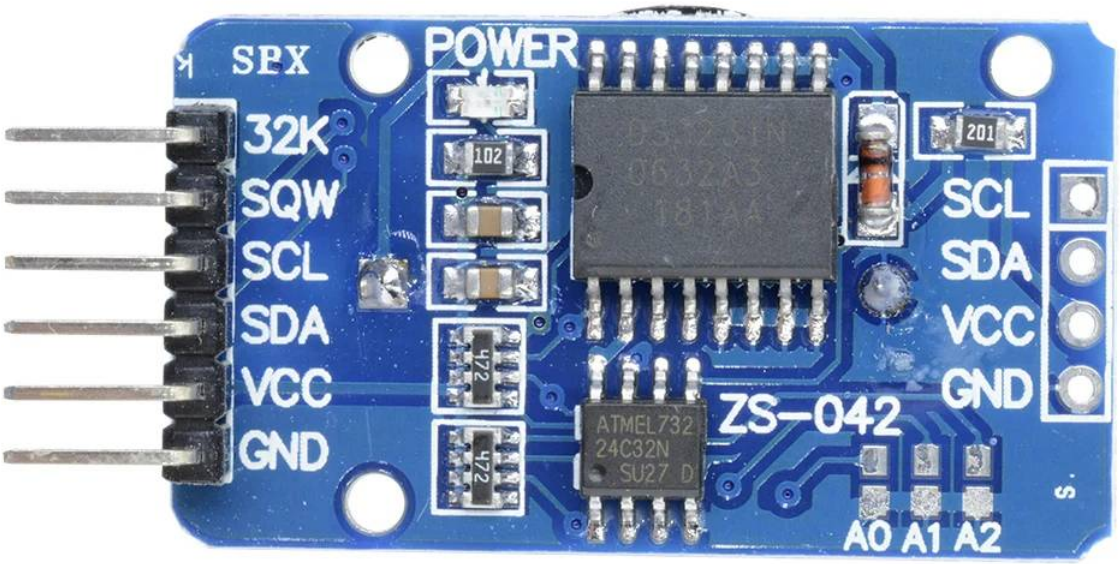
SPX
POWER
32K
SQW
SCL
SDA
VCC
GND
102
472
472
ATMEL732
24C32N
SU27 D
ZS-042
201
SCL
SDA
VCC
GND
A0 A1 A2

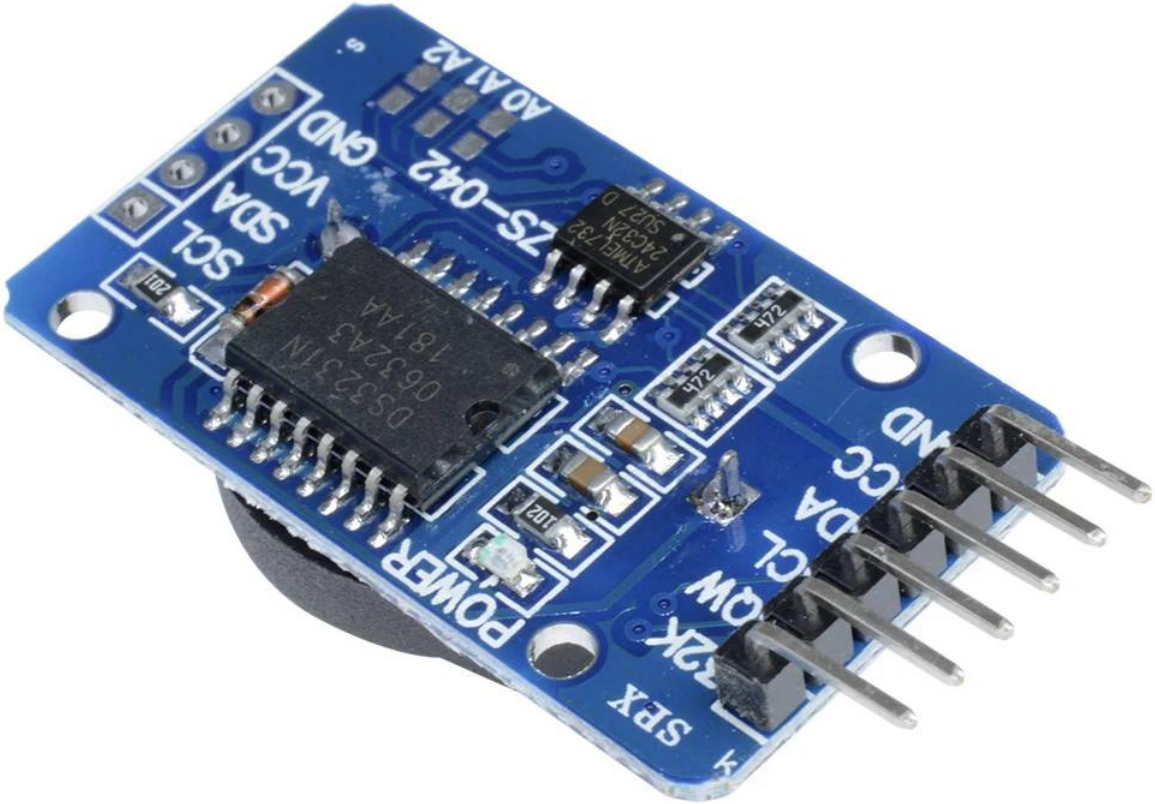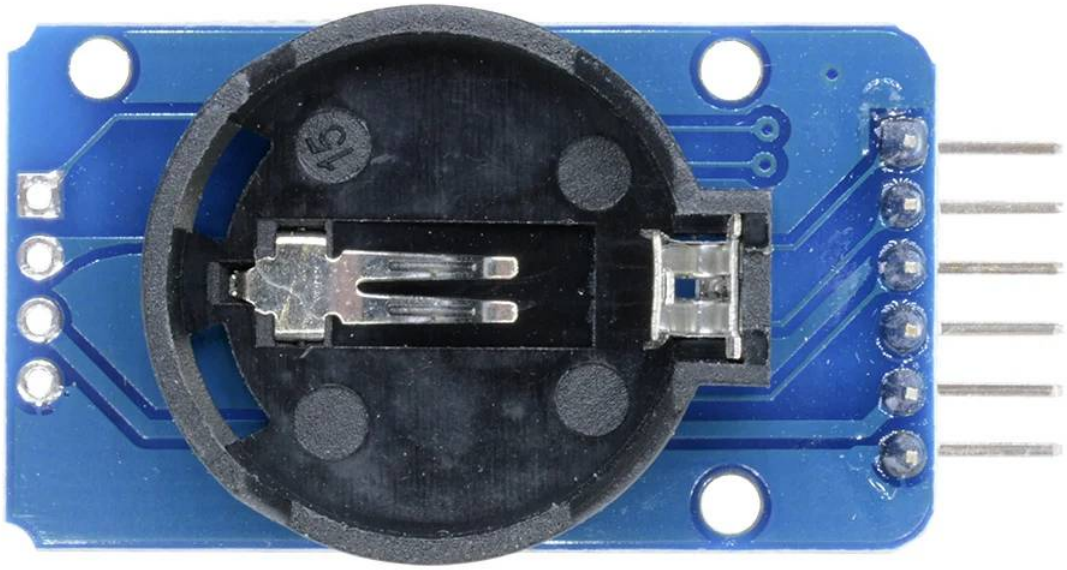
SCL
SDA
VCC
GND
ZS-042
A0 A1 A2
POWER
SPX