

1

2

3

4

A

A

B


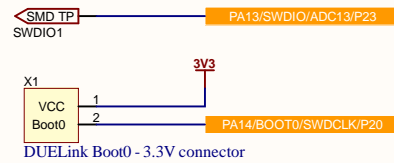
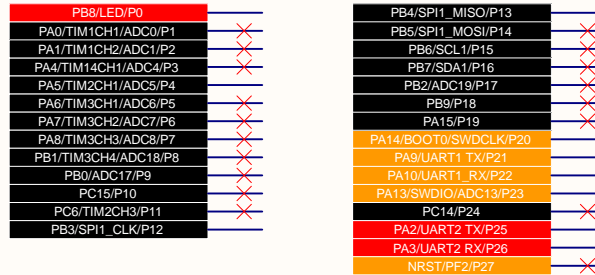
B

C

C

D

D

FID1
Fiducial 40 MilFID2
Fiducial 40 MilFID3
Fiducial 40 MilFID4
Fiducial 40 MilFID5
Fiducial 40 MilFID6
Fiducial 40 Mil

Title: <i>MISC</i>		
Part #: N/A		
Revision: A	Date: 1/5/2026	Sheet 2 of 5

© GHI Electronics, LLC - Michigan, USA



A

Software Features:

ADC: P1, P2, P3, P4, P5, P6, P7, P8, P9, P17

Touch: Can be any pin but hardware need 100pF + 1Mohm

HW PWM: P1, P2, P3, P4, P5, P6, P7, P8, P11

* P1, P2: TIM1

* P3: TIM14

* P4, P11: TIM2

* P5,6,7,8: TIM3

SW UART: Pins 1 RX, 2 TX

Wakeup Pins: P1, P3

Interrupts on: P1, P2, P3, P4, P5, P6, P7, P12

A

UART1 is available when not used in Uplink

