
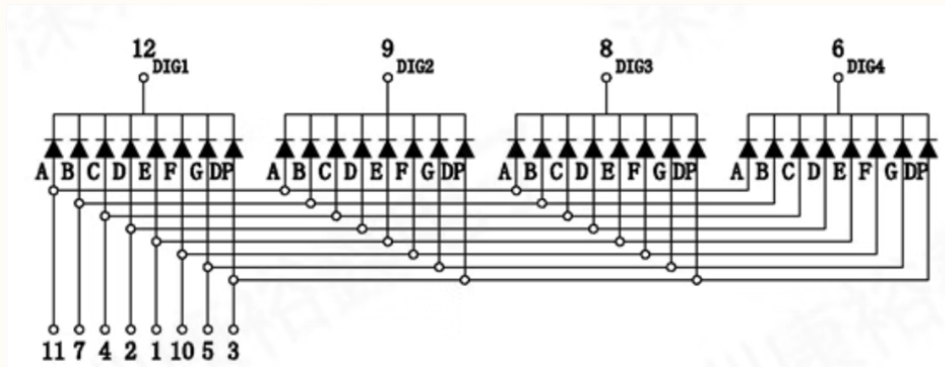
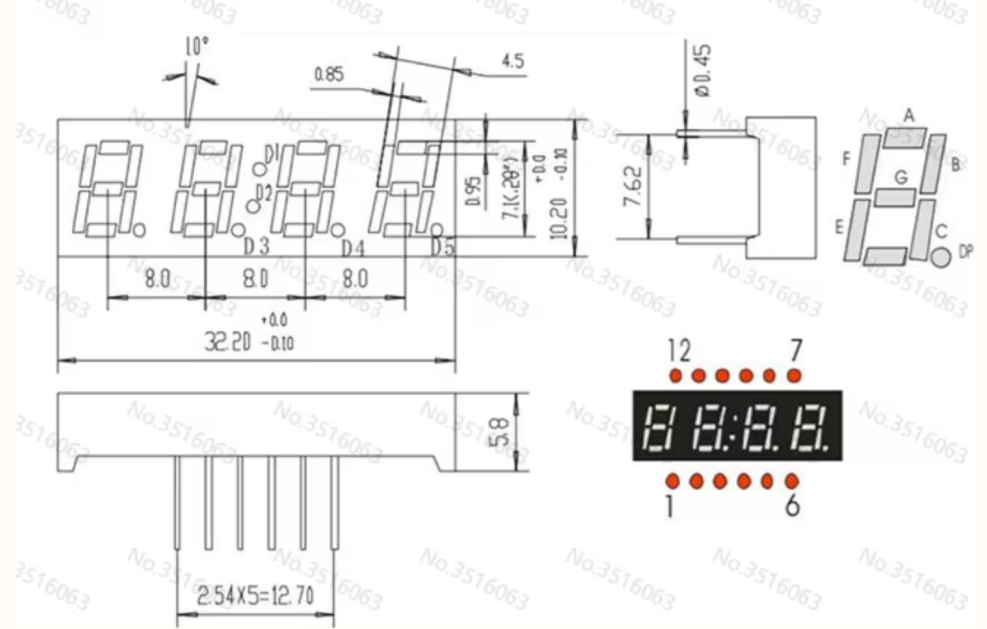


This is 0.28" size and can work with 2 types.  
 \* Time display with : in the middle  
 \* Digit display with decimal point

Common Cathode

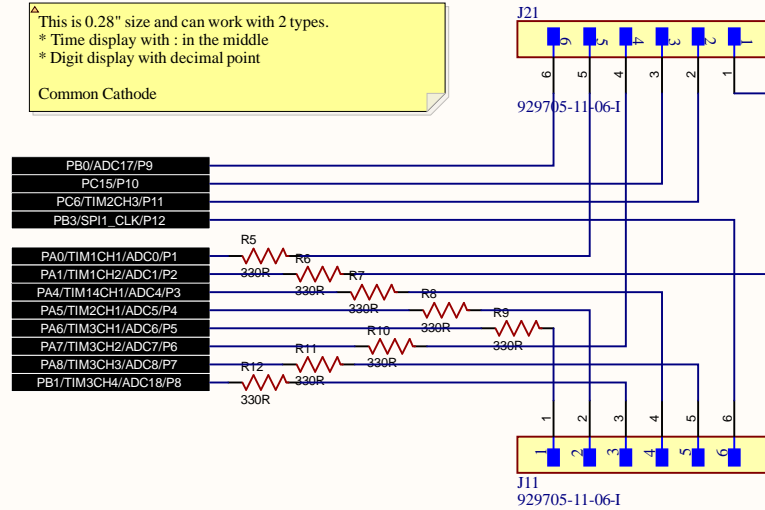

Title: **LED S284**

Part #: GDL-LDLEDS284-B

Revision: B

Date: 9/25/2025

Sheet 1 of 5



©2025 GHI Electronics, LLC - Michigan, USA

1

2

3

4

A

A

B




B

C

C

D

D

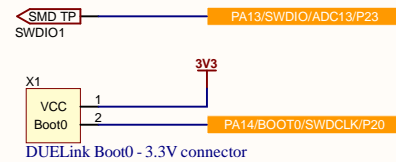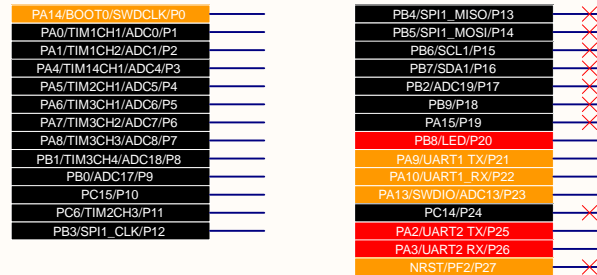

Fiducial 40 Mil



Fiducial 40 Mil



Fiducial 40 Mil



Fiducial 40 Mil



Fiducial 40 Mil



Fiducial 40 Mil

Title: <i>Misc</i>		
Part #: N/A		
Revision: B	Date: 9/25/2025	Sheet 2 of 5

©2025 GHI Electronics, LLC - Michigan, USA



Software Features:

ADC: P1, P2, P3, P4, P5, P6, P7, P8, P9, P17

Touch: Can be any pin but hardware need 100pF + 1Mohm

HW PWM: P1, P2, P3, P4, P5, P6, P7, P8, P11

\* P1, P2: TIM1

\* P3: TIM14

\* P4, P11: TIM2

\* P5,6,7,8: TIM3

SW UART: Pins 1 RX, 2 TX

Wakeup Pins: P1, P3

Interrupts on: P1, P2, P3, P4, P5, P6, P7, P12

UART1 is available when not used in Uplink

