


1

2

3

4

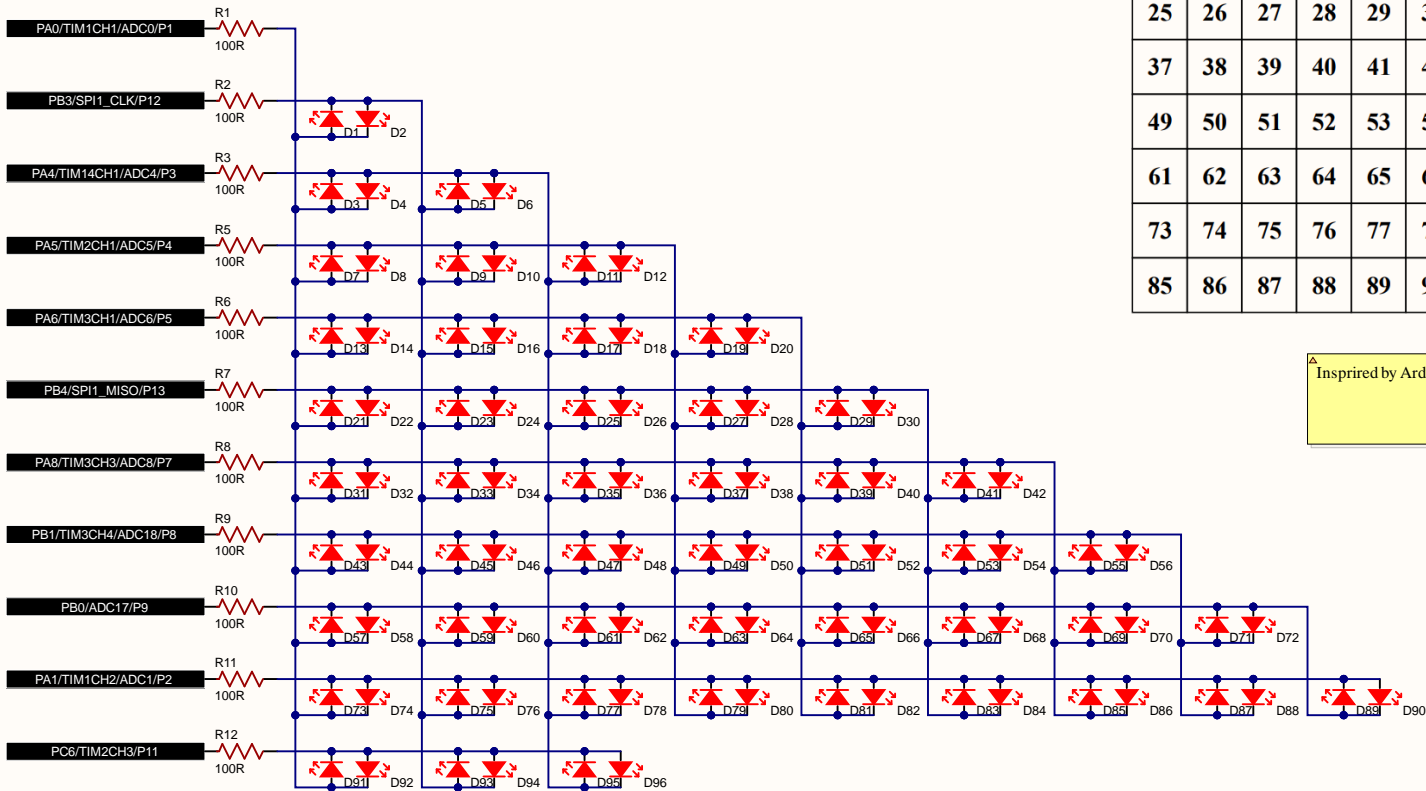

1	2	3	4	5	6	7	8	9	10	11	12
13	14	15	16	17	18	19	20	21	22	23	24
25	26	27	28	29	30	31	32	33	34	35	36
37	38	39	40	41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70	71	72
73	74	75	76	77	78	79	80	81	82	83	84
85	86	87	88	89	90	91	92	93	94	95	96

Inspired by Arduino UNO R4 WiFi LED matrix

Title: **LED MT12208**

Part #: **GDL-LDMT1208-A**

Revision: A

Date: 10/28/2025

Sheet 1 of 5

©2025 GHI Electronics, LLC - Michigan, USA



1

2

3

4

A

A

B




B

C

C

D

D

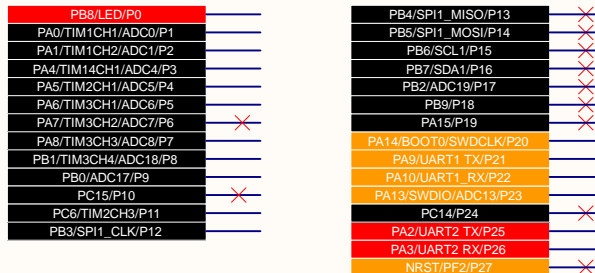

Fiducial 40 Mil



Fiducial 40 Mil



Fiducial 40 Mil



Fiducial 40 Mil



Fiducial 40 Mil



Fiducial 40 Mil

Title: <i>Misc</i>		
Part #: N/A		
Revision: A	Date: 10/28/2025	Sheet 2 of 5

©2025 GHI Electronics, LLC - Michigan, USA



Software Features:

ADC: P1, P2, P3, P4, P5, P6, P7, P8, P9, P17

Touch: Can be any pin but hardware need 100pF + 1Mohm

HW PWM: P1, P2, P3, P4, P5, P6, P7, P8, P11

* P1, P2: TIM1

* P3: TIM14

* P4, P11: TIM2

* P5,6,7,8: TIM3

SW UART: Pins 1 RX, 2 TX

Wakeup Pins: P1, P3

Interrupts on: P1, P2, P3, P4, P5, P6, P7, P12

UART1 is available when not used in Uplink





