

This aeronautical information/data is published for OPS SPEC use only


DEASE LAKE, BC

NDB B

582520N 1300153W VAR 19°E

CYDL

MET – 128.7		TFC – 123.2		ATF	ARCAL 123.2(K)* LIGHTING: REFER TO AD CHART
SAFE ALT 100 NM 12,300	NDB YDL 200	APCH CRS 192°	MIN ALT YDL 4900	LDA REFER TO AD CHART	

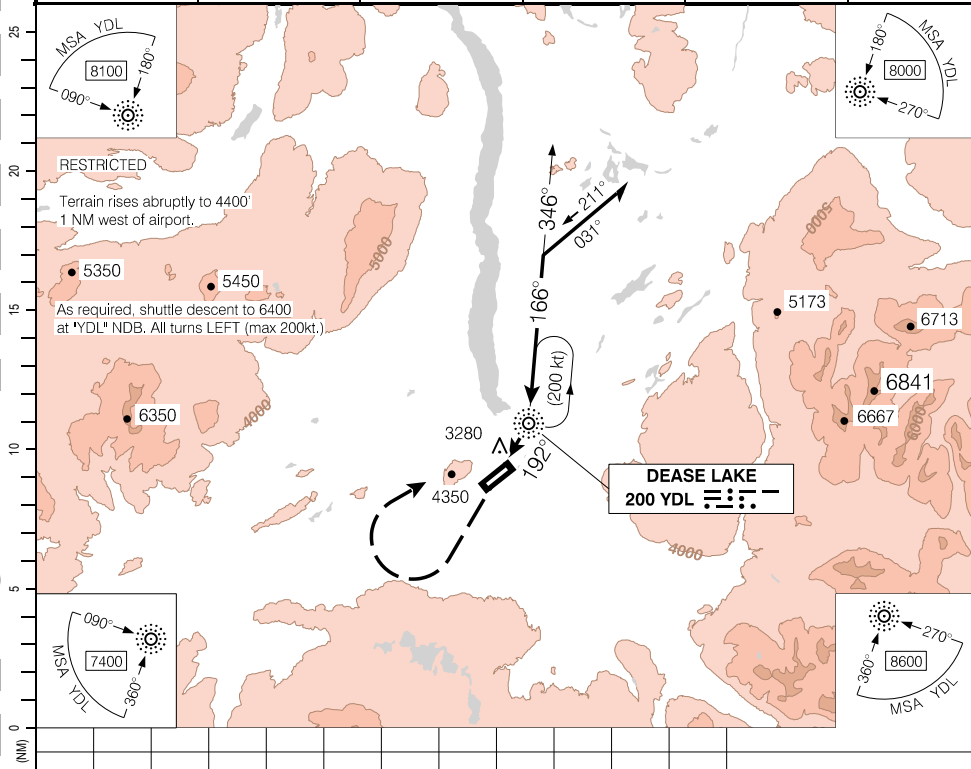

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved

Diagram illustrating a missed approach procedure:

- MDA (Minimum Descent Altitude):** 4900
- ELEV (Elevation):** 2634
- YDL NDB (Non-Directional Beacon):** Located at the end of the approach path.
- Procedure:**
 - Climb to **6400** track **192°**.
 - Climbing **RIGHT** turn to **6400** direct to "YDL" NDB.
 - Then shuttle to **7100** BPOC.

			CATEGORY	A	B	C	D
			CIRCLING	4800 (2166) 3	4840 (2206)	3	
"YDL" NDB to MAP 1.8 NM							
Knots	ft/min	Min:Sec					
70		1:33					
90		1:12					
110		0:59					
130		0:50					
150		0:43					

NDB B

EFF 10 AUG 23

REGULATORY REVIEW 20 JAN 2028

CYDL

CYDL-IAP-9A