

RESTRICTED CANADA AIR PILOT

This aeronautical information/data is published for OPS SPEC use only


CYDL-IAP-3E

DEASE LAKE, BC

RNAV (GNSS) X RWY 03

582520N 1300153W VAR 19°E

CYDL

MET – 128.7		TFC – 123.2		ATF	ARCAL 123.2(K)*
SAFE ALT 100 NM 12,300	WAAS Ch 81072 W03D	APCH CRS 036°	MIN ALT TUMAM 6400	LDA 6003	

RESTRICTED

VGSi not coincident with
RNAV glidepath.

Terrain rises abruptly to 4400' 1 NM west of airport.

If unable to meet climb gradient,
see RNAV (GNSS) Z RWY 03.

As required, shuttle descent to 7700 at
SEDOT (max 210 kt).


MISSED APPROACH CLIMB RATE V/V (FPM)

GROUND SPEED	90	120	140	160	180	200	250	300
260 FT/NM	390	520	610	700	780	870	1090	1300

RESTRICTED

RESTRICTED

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved

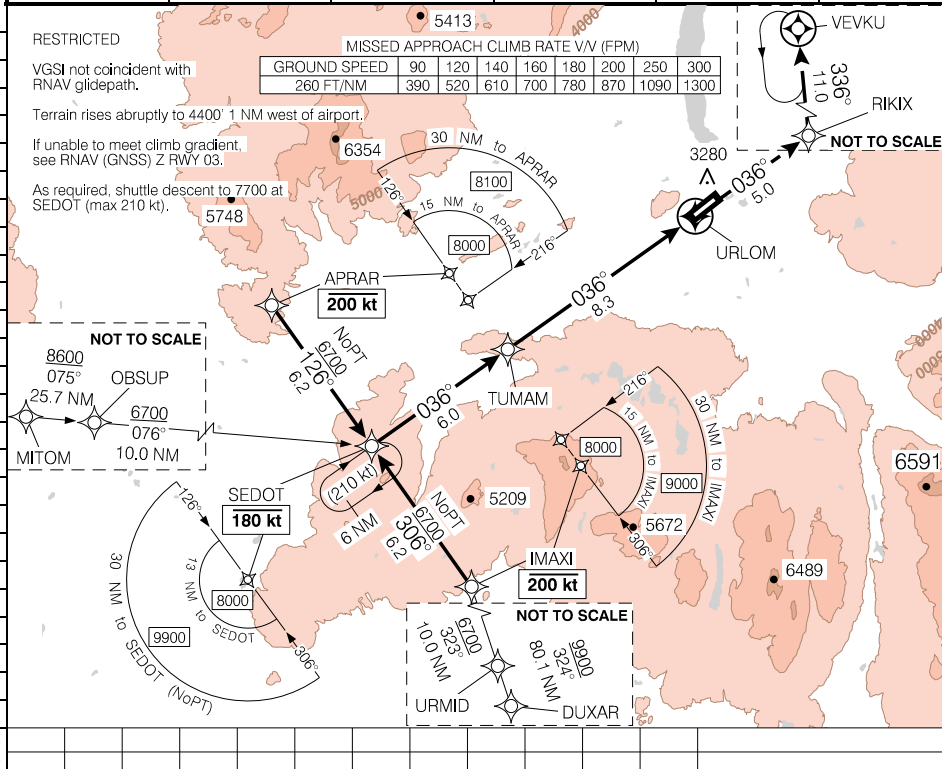

SEDOT
IAWP/IWP

TUMAM
FAWP

MISSED APPROACH

Requires a minimum climb gradient
of 260 ft/NM to 4700. Climb track 036° to
RIKIX, then continue climb track 336° to
VEVKU to 7500. As required shuttle climb.
Shuttle to 7900 BPOC.

ELEV 2634
TDZE 2626

			CATEGORY	A	B	C	D
			LPV	3176	(573)	1%	NOT AUTHORIZED
Knots	ft/min	Min:Sec					
70							
90							
110							
130							
150							

RNAV (GNSS) X RWY 03

CYDL

EFF 31 OCT 24

REGULATORY REVIEW 6 JUL 2028

CYDL-IAP-3E