


NDB A

633700N 1355208W VAR 20°E

		APRT RADIO – 122.1		LIGHTING: REFER TO AD CHART
SAFE ALT 100 NM 10,200		NDB MA 365	APCH CRS 270°	
		LDA REFER TO AD CHART		

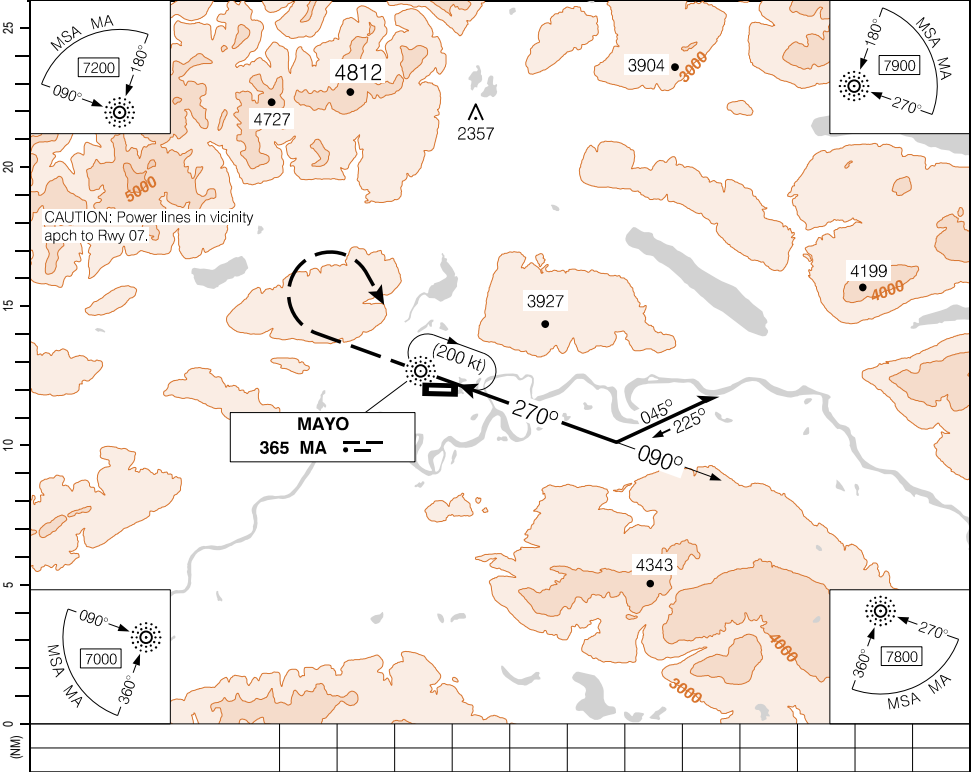

MISSED APPROACH Climb to 5300 track 270° . Then climbing RIGHT turn to 6000 direct to "MA" NDB. As required shuttle climb.					
The diagram illustrates the missed approach procedure. It shows a climb to 5300 feet on a 270° track, followed by a right turn to 6000 feet direct to the "MA" NDB. A shuttle climb is also indicated, reaching 5800 feet. The procedure turn is left within 10 NM of the "MA" NDB.					
ELEV 1653					
MDA					
Procedure turn LEFT within 10 NM of "MA" NDB.					
CATEGORY		A	B	C	D
CIRCLING		4300	(2647)	3	
Knots	ft/min	Min:Sec			
70					
90					
110					
130					
150					

NDB A

CYMA

EFF 7 OCT 21