


RNAV (GNSS) RWY 06

483632N 0681229W VAR 16°W

|                             |                          |                     |                          |          |
|-----------------------------|--------------------------|---------------------|--------------------------|----------|
| CTR Montreal – 134.65 227.2 |                          | RADIO – 122.1       |                          | P2<br>AO |
| SAFE ALT 100 NM<br>5900     | WAAS<br>Ch 80213<br>W06A | APCH<br>CRS<br>054° | MIN ALT<br>GOTAT<br>2000 |          |
| LDA 6000                    |                          |                     |                          |          |

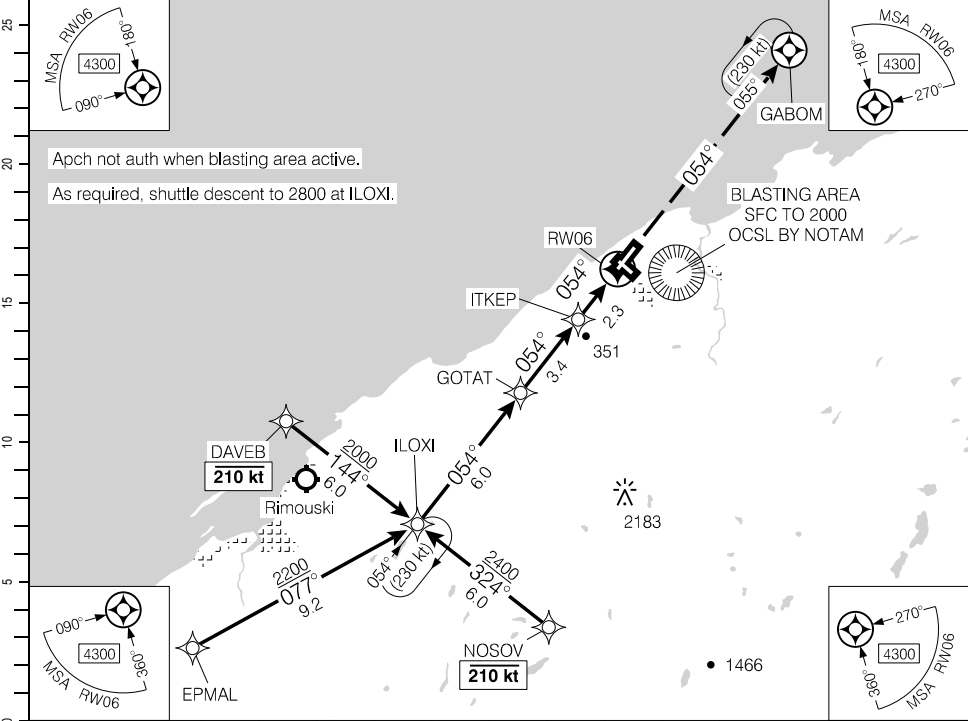

|                                                                                  |      |      |      |      |      |      |      |      |      |     |                       |  |
|----------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|-----|-----------------------|--|
| DIST FROM RW06                                                                   |      |      |      |      |      |      |      |      |      |     | ALT (3.00° APCH PATH) |  |
| 11.7                                                                             | 11   | 10   | 9    | 8.2  | 7    | 6    | 5    | 4    | 3    | 2   | 1.1                   |  |
| 3910                                                                             | 3700 | 3390 | 3070 | 2800 | 2430 | 2110 | 1790 | 1470 | 1150 | 840 | 560                   |  |
| ILOXI<br>IAWP/IWP<br>3910                                                        |      |      |      |      |      |      |      |      |      |     |                       |  |
| 2800                                                                             |      |      |      |      |      |      |      |      |      |     |                       |  |
| GOTAT<br>FAWP<br>2000                                                            |      |      |      |      |      |      |      |      |      |     |                       |  |
| ITKEP<br>SDWP<br>930                                                             |      |      |      |      |      |      |      |      |      |     |                       |  |
| RW06<br>MAWP                                                                     |      |      |      |      |      |      |      |      |      |     |                       |  |
| ELEV 172<br>TDZE 148                                                             |      |      |      |      |      |      |      |      |      |     |                       |  |
| MISSED APPROACH<br>Climb to 4300 track 054° to GABOM. As required shuttle climb. |      |      |      |      |      |      |      |      |      |     |                       |  |
| 3.00°                                                                            |      |      |      |      |      |      |      |      |      |     |                       |  |
| 2000                                                                             |      |      |      |      |      |      |      |      |      |     |                       |  |
| 054°                                                                             |      |      |      |      |      |      |      |      |      |     |                       |  |
| 900 (LNAV only)                                                                  |      |      |      |      |      |      |      |      |      |     |                       |  |
| MDA                                                                              |      |      |      |      |      |      |      |      |      |     |                       |  |
| TCH 50'                                                                          |      |      |      |      |      |      |      |      |      |     |                       |  |
| 6.0                                                                              |      |      |      |      |      |      |      |      |      |     |                       |  |
| 3.4                                                                              |      |      |      |      |      |      |      |      |      |     |                       |  |
| 2.3                                                                              |      |      |      |      |      |      |      |      |      |     |                       |  |
| CATEGORY                                                                         |      |      |      |      |      |      |      |      |      |     |                       |  |
| A                                                                                |      |      |      |      |      |      |      |      |      |     |                       |  |
| B                                                                                |      |      |      |      |      |      |      |      |      |     |                       |  |
| C                                                                                |      |      |      |      |      |      |      |      |      |     |                       |  |
| D                                                                                |      |      |      |      |      |      |      |      |      |     |                       |  |
| LPV                                                                              |      |      |      |      |      |      |      |      |      |     |                       |  |
| 398 (250) 1 RVR 50                                                               |      |      |      |      |      |      |      |      |      |     |                       |  |
| LNAV/VNAV (min. -19°C, max. 54°C)                                                |      |      |      |      |      |      |      |      |      |     |                       |  |
| 533 (385) 1¼                                                                     |      |      |      |      |      |      |      |      |      |     |                       |  |
| LNAV                                                                             |      |      |      |      |      |      |      |      |      |     |                       |  |
| 560 (412) 1¼                                                                     |      |      |      |      |      |      |      |      |      |     |                       |  |
| Knots                                                                            |      |      |      |      |      |      |      |      |      |     |                       |  |
| 70 370                                                                           |      |      |      |      |      |      |      |      |      |     |                       |  |
| ft/min                                                                           |      |      |      |      |      |      |      |      |      |     |                       |  |
| 90 480                                                                           |      |      |      |      |      |      |      |      |      |     |                       |  |
| Min:Sec                                                                          |      |      |      |      |      |      |      |      |      |     |                       |  |
| 110 580                                                                          |      |      |      |      |      |      |      |      |      |     |                       |  |
| 130 690                                                                          |      |      |      |      |      |      |      |      |      |     |                       |  |
| 150 800                                                                          |      |      |      |      |      |      |      |      |      |     |                       |  |

RNAV (GNSS) RWY 06

CYYY

EFF 19 MAR 26

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved