


RNAV (GNSS) RWY 05

532629N 0914546W VAR 3°W

AWOS – 124.45		TFC – 123.2		ATF		ARCAL 123.2(K)* Ⓐ \$. .
SAFE ALT 100 NM 2600	WAAS Ch 80436 W05A	APCH CRS 052°	MIN ALT XIKEL 2200	LDA 3508		

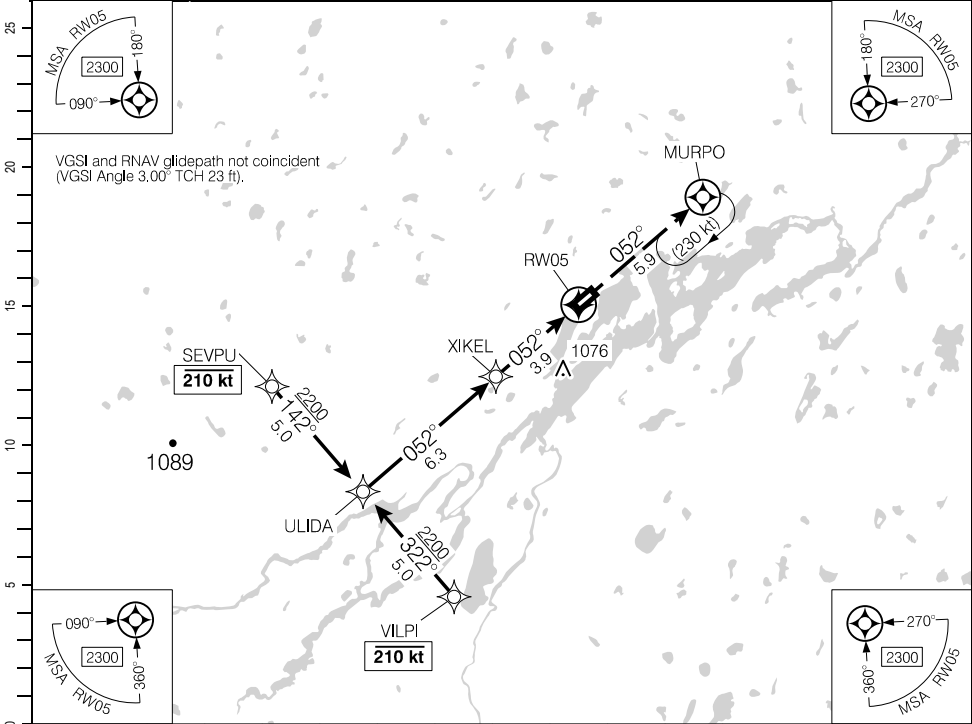

	10.3	9	8	7	6	5	3.9	3	2	1.4	DIST FROM RW05
	4210	3810	3490	3180	2860	2540	2200	1900	1580	1400	ALT (3.00° APCH PATH)
ULIDA IAWP/IWP 4210							XIKEL FAWP 2200	MISSED APPROACH Climb to 2300 track 052° to MURPO.			
2200							052°	ELEV 911 TDZE 903			
2200							MDA	TCH 50'			
6.3							3.9				

RASS: When using CYTL add 200'.		CATEGORY	A	B	C	D
		LPV	1396	(500)	1¼	
		LNAV	1400	(504)	1½	
Knots	ft/min	Min:Sec				
70	380					
90	480					
110	590					
130	690					
150	800					

RNAV (GNSS) RWY 05

CZMD