


ILS Z RWY 25

491233N 0572340W VAR 18°W


SAFE ALT 100 NM 4400		LOC IDF 108.3	APCH CRS 244°	GP NUGOT 1300	LDA 8005	AN
CTR Gander – 134.6		RADIO – 122.2 239.6			MF	

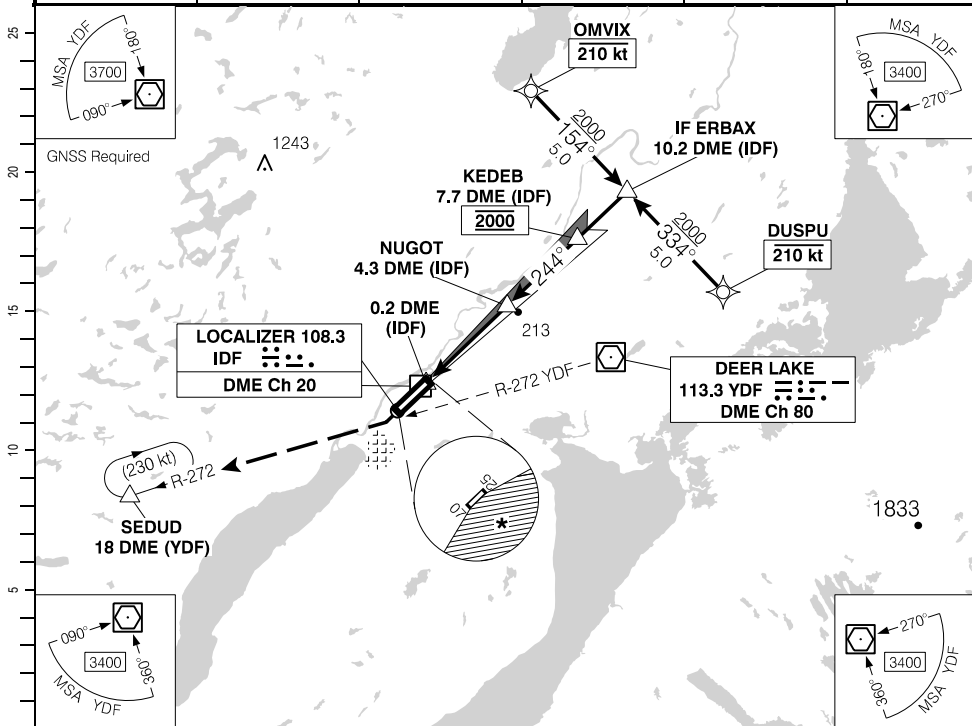

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved

MISSED APPROACH

Climb hdg **244°** to intercept
OBD "YDF" **R-272**. Then climb
to **4000** to SEDUD. As required
shuttle climb.

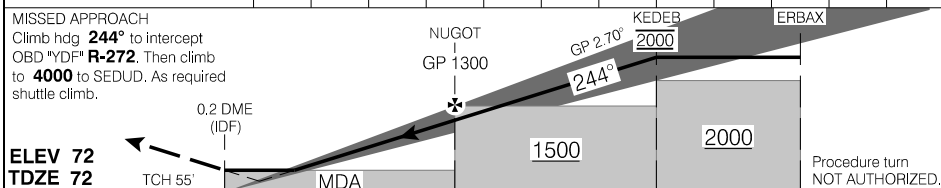

				4.0		3.5		2.5					
				CATEGORY		A		B		C		D	
				ILS/DME		272		(200)		½			
				LOC/DME		420		(348)		1			
Knots	ft/min	Min.Sec											
70													
90													
110													
130													
150													
				CIRCLING		700 (628) 1½		800 (728) 1½		* 820 (748) 2¼		* 1120 (1048) 3	

ILS Z RWY 25

EFF 2 OCT 25

CYDF