


RNAV (GNSS) RWY 33 (TRUE)

692153N 0814859W VAR N/A

		APRT RADIO – 122.1 TFC – 122.1				ARCAL 122.1 (K)* AP 2.1
SAFE ALT 100 NM 4300	WAAS Ch 81045 W33A	APCH CRS 326°T	MIN ALT VITIR 1500	LDA 4095		

Baro VNAV not auth when using remote altimeter
Procedure on the fringe of WAAS coverage.
Occasional outages may occur.

25
20
15
10
5
0
(NM)

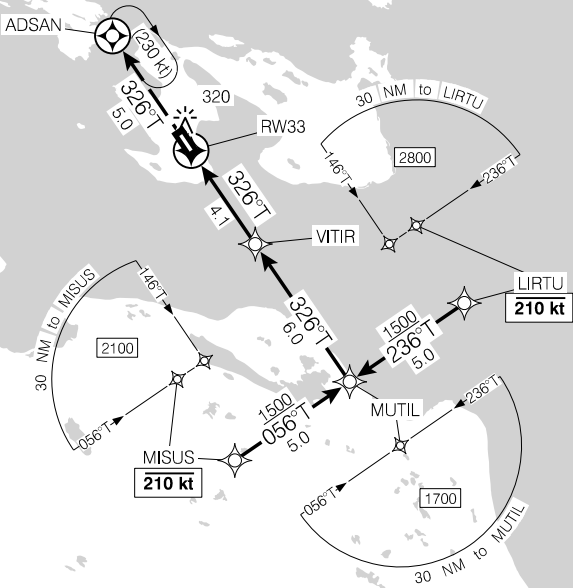

DIST FROM RW33				1.4	2	3	4.1	5	6	7	8	9	10.1		
ALT (3.00° APCH PATH)				660	840	1160	1500	1800	2110	2430	2750	3070	3410		
MISSED APPROACH Climb to 1900 track 326°T to ADSAN. As required shuttle climb. ELEV 173 TDZE 162 RW33 MAWP TCH 50' MDA 326°T VITIR FAWP 1500 1500 MUTIL IAWP/IWP 3410 1500 3.00°															
RASS: When using CYUX add 110'.				CATEGORY	A		B		C		D				
				LPV	653		(500)		1¼						
				LNAV/VNAV (min. -19°C, max. 54°C)	653		(500)		1¼						
Knots	ft/min	Min:Sec		LNAV	660		(507)		1½						
70	370														
90	480														
110	580														
130	690														
150	800														

RNAV (GNSS) RWY 33 (TRUE)

CYGT

EFF 5 OCT 23