



ILS Z RWY 11L (DND)

● ATIS – 131.3 257.8	● TML – 119.0 227.6 ● PAR – 119.0 227.6	● TWR – 126.2 295.6	● GND – 121.8 275.8	AF-SF P2
SAFE ALT 100 NM 4700	LOC IBP 109.3	APCH CRS 109°	GP NADAG 3630	

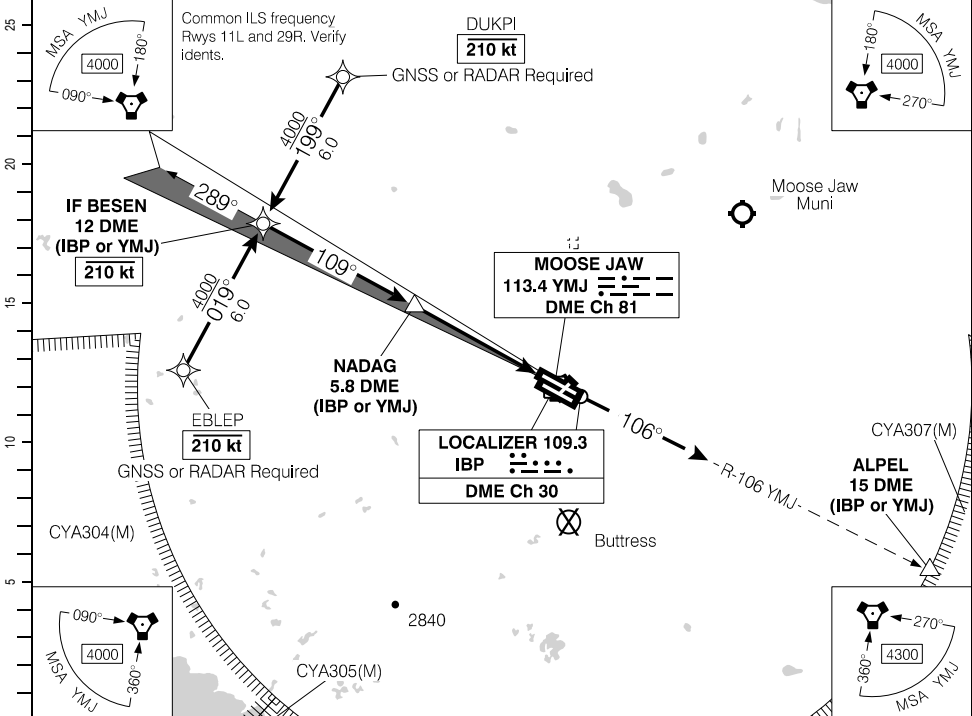

12	11	10	9	8	7.1	6	5	4	3	2	1.5	DIST FROM DME (IBP or YMJ)
5570	5250	4930	4610	4300	4000	3660	3340	3020	2700	2380	2240	ALT (3.00° APCH PATH)

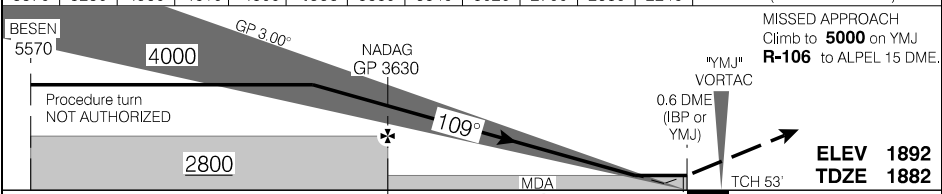

			CATEGORY	5.2								
			ILS/DME	2082		(200)		1½				
Knots	ft/min	Min:Sec	LOC/DME	2240		(358)		1				
70	370		CIRCLING	2400	(508)	1½	2420	(528)	2			
90	480									2500	(608)	2
110	580											
130	690											
150	800											

ILS Z RWY 11L (DND)

EFF 16 MAY 24