


RNAV (GNSS) RWY 11R (DND)

◉ ATIS – 131.3 257.8	◉ TML – 119.0 227.6	◉ TWR – 126.2 295.6	◉ GND – 121.8 275.8	
SAFE ALT 100 NM 4700	WAAS Ch 81075 W11B	APCH CRS 109°	MIN ALT TOSUV 2700	LDA 7280

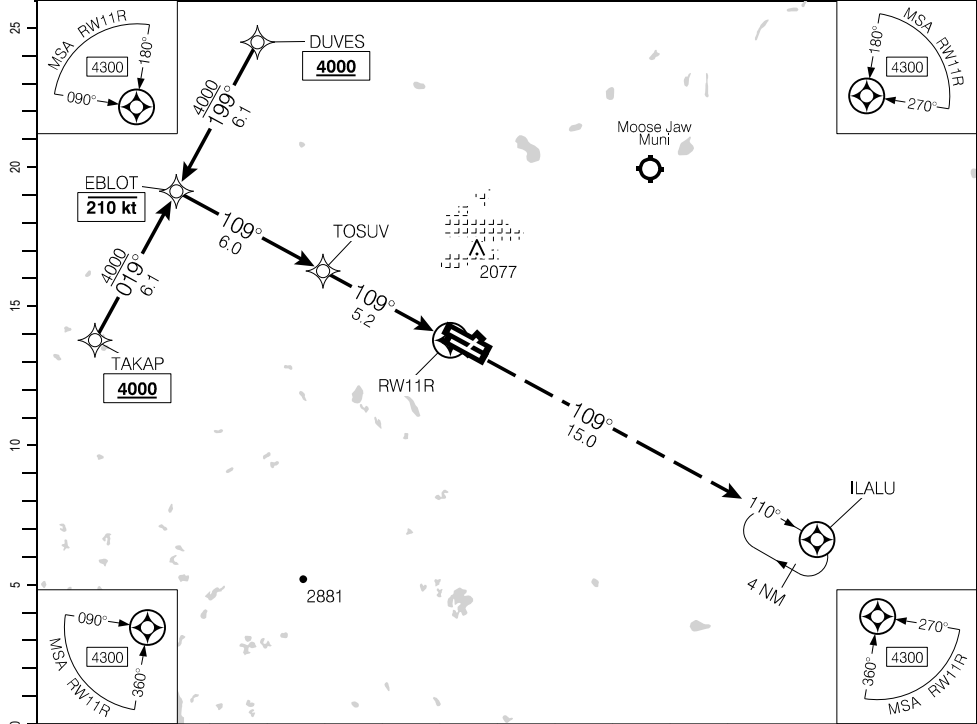

	11	10	9	8	6.5	6	5	4	3	2	1.1	DIST FROM RW11R
	5450	5130	4810	4490	4000	3850	3530	3220	2900	2580	2300	ALT (3.00° APCH PATH)
EBLOT IAWP/IWP 5510	4000 2700 6.0 5.2 109° 3.00° TOSUV FAWP 3600 RW11R MAWP ELEV 1892 TDZE 1890 MDA TCH 52'											MISSED APPROACH Climb to 5000 direct ILALU and hold.
		CATEGORY	A		B		C		D			
		LPV	2140		(250)		1					
Knots	ft/min	Min:Sec	LNAV/VNAV (min. -12°C, max. 54°C)		2256		(366)		1¼			
70	370											
90	480		LNAV		2300		(410)		1¼			
110	580											
130	690											
150	800		C CIRCLING		2360		(468) 1¼		2420 (528) 2		2460 (568) 2	

RNAV (GNSS) RWY 11R (DND)