


TACAN RWY 13L (DND)

ATIS – 118.25 260.0	TML – 124.5 322.8 PAR – 119.4 336.0	TWR – 126.2 226.5 236.6 255.7 ● ADVSY Cold Lake – 126.2	GND – 121.9 275.8	
SAFE ALT 100 NM 4300	TACAN UD Ch 82	APCH CRS 140°	MIN ALT AXEPI 3000	LDA 12599

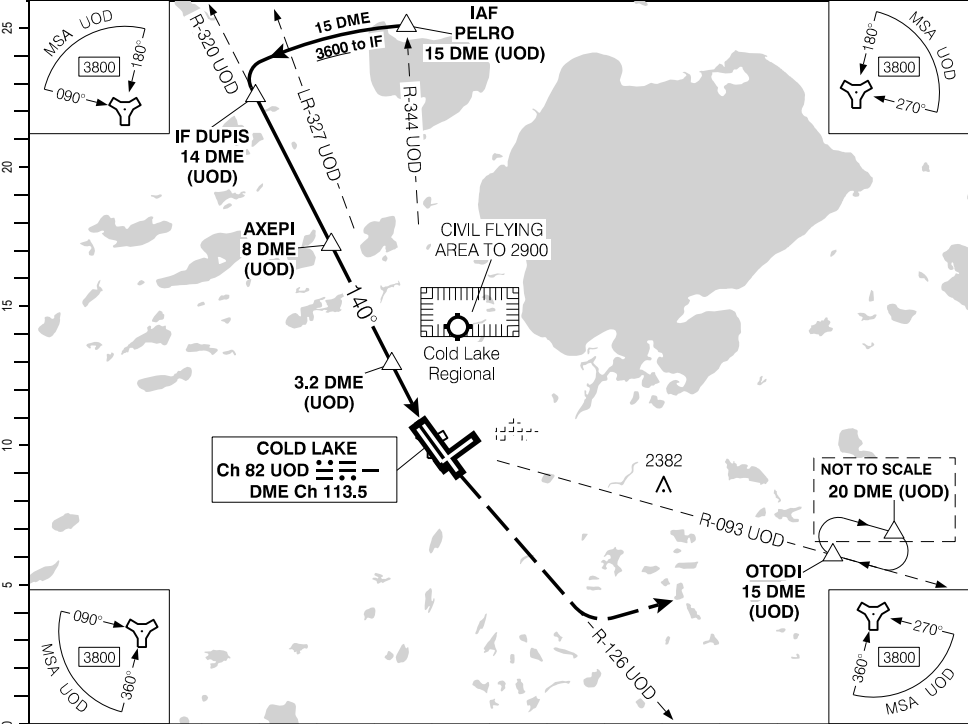

14	13	12	11	10	9	8.3	7	6	5	4	3	1.7	DIST FROM DME (UOD)
6030	5710	5390	5070	4750	4430	4200	3800	3480	3160	2840	2520	2120	ALT (3.00° APCH PATH)
DUPIS 6030													
4200													
AXEPI 4110													
3000													
6.0													
4.8													
2.4													
MDA													
ELEV 1775 TDZE 1772													
CATEGORY													
TACAN													
2120													
(348)													
1													
CIRCLING													
2360 (585) 1½													
2520 (745) 2¼													
Knots													
ft/min													
Min:Sec													
70 370													
90 480													
110 580													
130 690													
150 800													

TACAN RWY 13L (DND)