

CYLW / YLW
KELOWNA

GE Aerospace

MVD
(B737-NG)

19-4

10 JAN 24

EFF: 21 MAR 24

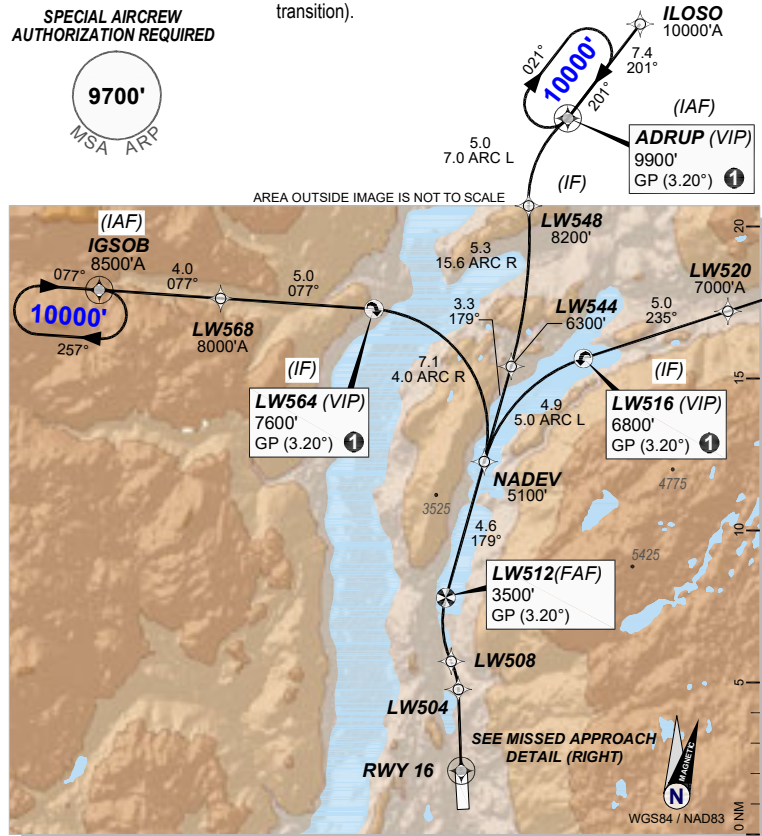
WESTJET

KELOWNA, BC

RNAV (RNP) W RWY 16

GE PROPRIETARY INFORMATION

ATIS 127.5	VANCOUVER Center 133.5	*KELOWNA Tower 119.6	*KELOWNA Ground 121.7	PENTICTON Radio (Remote ASS) MF 119.6 when Twr inop	
RNAV (RNP) RNV W 16	FMS Rwy Heading 160°	Apt Elev. 1420' TDZE 1409'	IGSOB (IAF) 8500'A	ADRUP (IAF) 9900' (3.20°)	MATIP (IAF) 11300'A
LW512 (FAF) 3500' (3.20°)	Trans Level FL180	① VNAV PATH must be annunciated beyond this point. (LW564 for IGSOB transition, ADRUP for ADRUP transition, LW516 for MATIP transition).			

SPECIAL AIRCREW
AUTHORIZATION REQUIRED

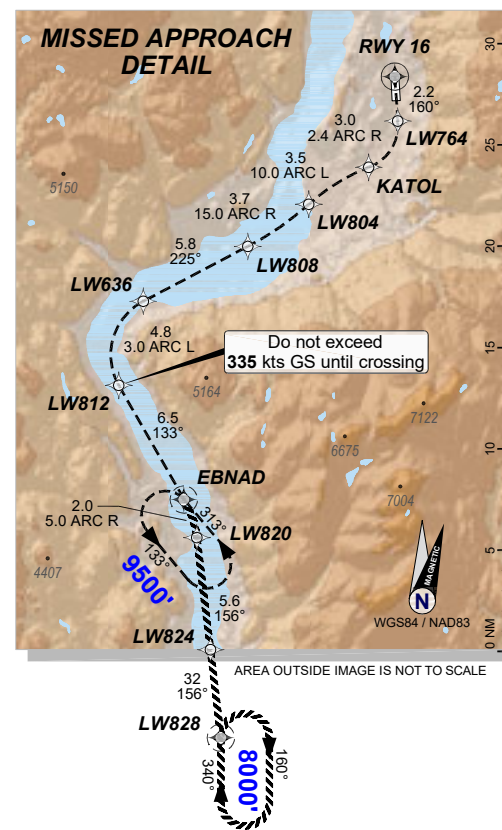
LW512 GP 3500' (2091')		LW508 GP 2720' (1311')		LW504 GP 2390' (981')		RWY 16 TCH 50' TDZE 1409'	
5.8		3.7		2.7		2.7	
3.0 ARC L		2.5 ARC R					
RNP 0.10		RNP 0.15		RNP 0.20		RNP 0.30	
DA(H) 1791' (382')		DA(H) 1982' (573')		DA(H) 2088' (679')		DA(H) 2299' (890')	
C 1 1/4		C 1 3/4		C 2		C 2 3/4	
D		D		D		D	

MISSED APPROACH:

Climb to 9500' via the RNAV (RNP) Missed Approach track to EBNAD and hold as published. Maximum holding speed 230 KIAS. Do not exceed 335 kts ground speed until turn complete at LW812.

ENGINE OUT MISSED APPROACH:

If unable to cross EBNAD at 9500', advise ATC, and climb to 8000' via the RNAV (RNP) Engine Out Missed Approach track to LW828 and hold as published. Maximum holding speed 230 KIAS.

**APPROACH:**

- Verify GPS predictions provide the necessary ANP requirements for the approach
- Alt Set: INCHES
- Approach not authorized when airport temperature below -21 degrees C or above 44 degrees C.
- Approach not authorized using remote altimeter setting

REQUIRED EQUIPMENT:

- EGPWS (Set TERR)
- (2) FMCS
- (2) GPS
- (2) IRS in NAV Mode
- (2) PFD/ND Displays
- (2) Flight Director Displays
- (1) A/P Channel in LNAV/VNAV
- (1) Radio Altimeter operating with associated Flight Director

FMS:

- DME/DME off
- RNP lateral (as required)
- RNP vertical 125'
- Enter wind correction