


ATIS – 121.15 (En) 132.95 (Fr)	ARR – 135.15	TWR – 118.8		GND – 121.9	
SAFE ALT 100 NM 7100	WAAS Ch 80161 W07A	APCH CRS 071°	MIN ALT AMOB1 1700	LDA 8000	

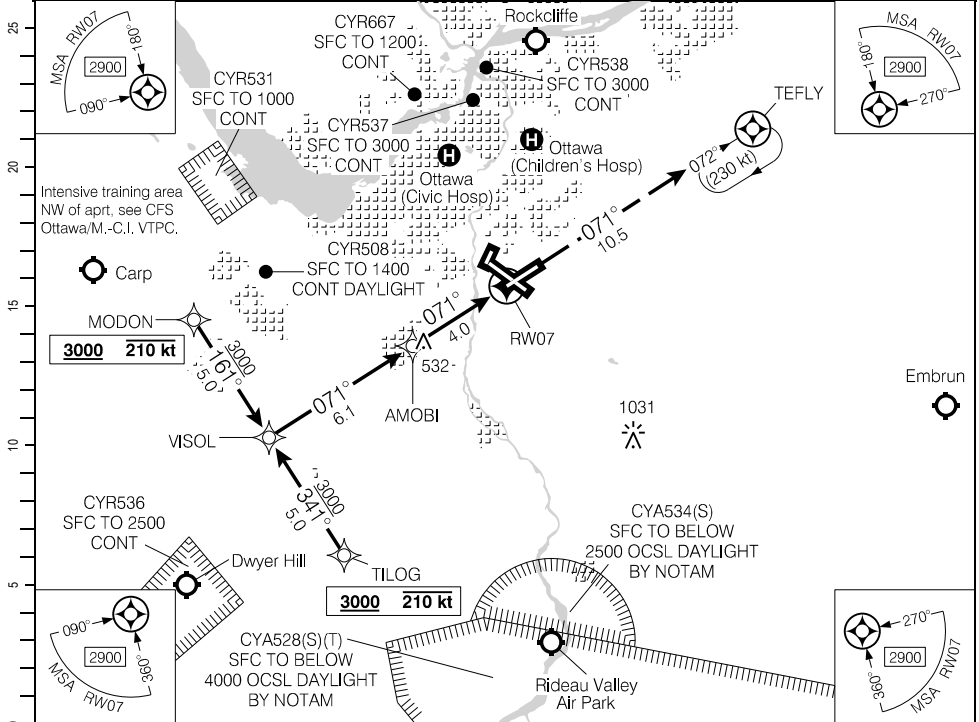

				10.1	9	8.1	7	6	5	4	3	2	1.0	DIST FROM RW07																
				3650	3300	3000	2660	2340	2020	1700	1380	1060	740	ALT (3.00° APCH PATH)																
VISOL IAWP/IWP 3650 3000 3.00° 071° 1700 6.1 AMOBI FAWP 1700 4.0 MDA 4.0 RW07 MAWP 58' ELEV 377 TDZE 373 MISSED APPROACH Climb to 3000 track 071° to TEFly. As required shuttle climb.																														
				CATEGORY	A		B		C		D																			
				LPV	569		(200)		½ RVR 26																					
<table><tr><th>Knots</th><th>ft/min</th><th>Min:Sec</th></tr><tr><td>70</td><td>370</td><td></td></tr><tr><td>90</td><td>480</td><td></td></tr><tr><td>110</td><td>580</td><td></td></tr><tr><td>130</td><td>690</td><td></td></tr><tr><td>150</td><td>800</td><td></td></tr></table>				Knots	ft/min	Min:Sec	70	370		90	480		110	580		130	690		150	800		LNAV/VNAV (min. -19°C, max. 54°C)	657		(289)		1 RVR 50			
				Knots	ft/min	Min:Sec																								
70	370																													
90	480																													
110	580																													
130	690																													
150	800																													
				LNAV	740		(372)		1 RVR 50																					

CYOW