


RNAV (GNSS) Z RWY 24

464728N 0712336W VAR 16°W

ATIS – 134.6 (En) 128.3 (Fr)	TML – 124.0 127.85 322.8	TWR – 118.65 236.6	GND – 121.9 250.0	
SAFE ALT 100 NM 6200	WAAS Ch 80103 W24A	APCH CRS 241°	MIN ALT ULBOM 2500	LDA 9000

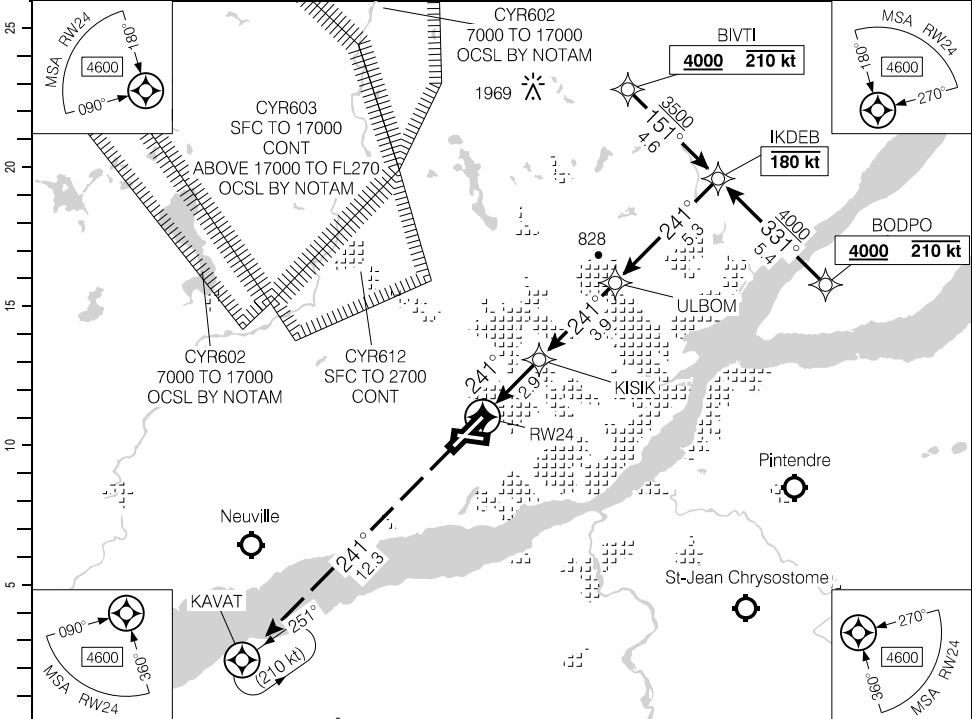

DIST FROM RW24		1.1	2	3	4	5	6	7	8	9	10	11.3	12.1	
ALT (3.10° APCH PATH)		640	930	1260	1580	1910	2240	2570	2900	3230	3560	4000	4240	
MISSED APPROACH Climb to 3000 track 241° to KAVAT. As required shuttle climb.														
ELEV 243 TDZE 235		KISIK SDWP 1220 ULBOM FAWP 2500 IKDEB IWP 4240 4000 241° 3.10° 2500 920 (LNAV only) MDA TCH 50' RW24 MAWP 2.9 3.9 5.3												
		CATEGORY		A		B		C		D				
		LPV		417		(200)		½						
		LNAV/VNAV (min. -25°C, max. 54°C)		557		(340)		1						
Knots	ft/min	Min:Sec												
70	380													
90	490													
110	600		LNAV		640		(423)		1					
130	710													
150	820													

RNAV (GNSS) Z RWY 24

CYQB

EFF 31 OCT 24

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved