



ATIS – 128.0		CTR Gander – 133.15 227.3		TWR – 120.6 236.6		GND – 121.9 275.8		TDZL 
SAFE ALT 100 NM 3000		LOC IMP 109.1		APCH CRS 103°		GP AVODA 1500		

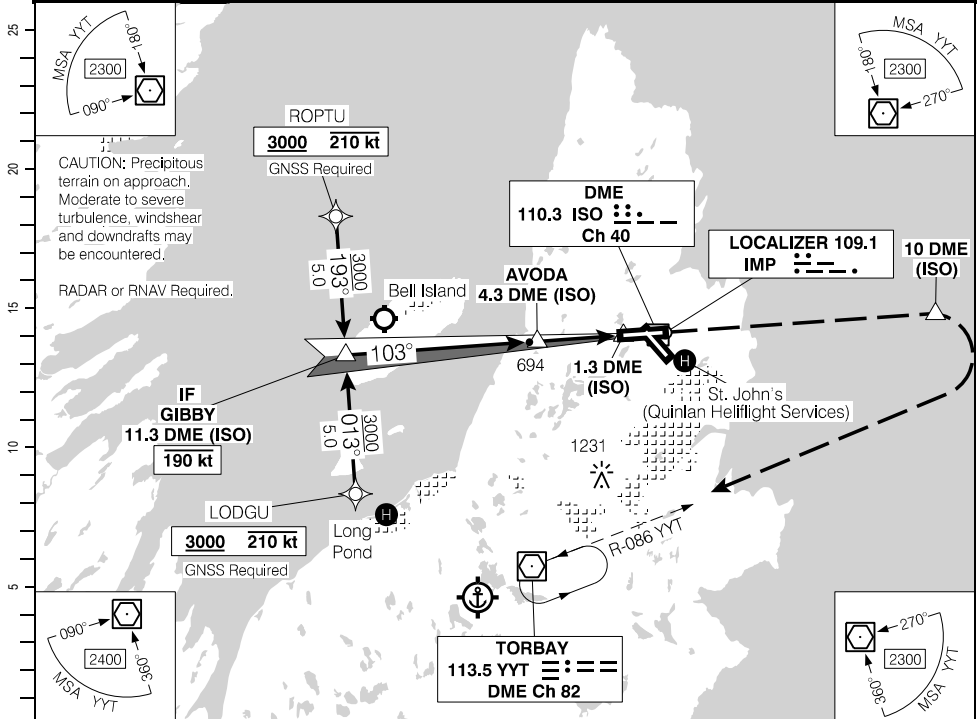

		11.3	10	9.1	8	7	6	5	4	2.7		DIST FROM DME (ISO)
		3700	3300	3000	2660	2340	2030	1710	1390	960		ALT (3.00" APCH PATH)

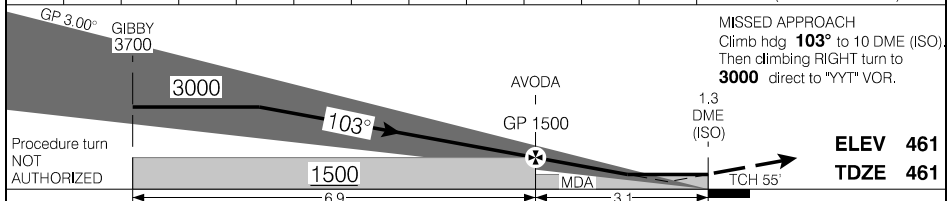

			CATEGORY	A	B	C	D
			ILS/DME	661	(200)	½ RVR 26	
Knots	ft/min	Min:Sec	LOC/DME	960	(499)	1 RVR 50	
70	370						
90	480						
110	580						
130	690						
150	800						