


ILS Y RWY 26 (DND)

445903N 0645503W VAR 17°W

● ATIS – 128.85 244.3	TML – 120.6 335.9	TWR – 119.5 324.3	GND – 133.75 289.4	
SAFE ALT 100 NM 3000	LOC IZX 110.7	APCH CRS 261°	GP GF 1580	LDA 7999

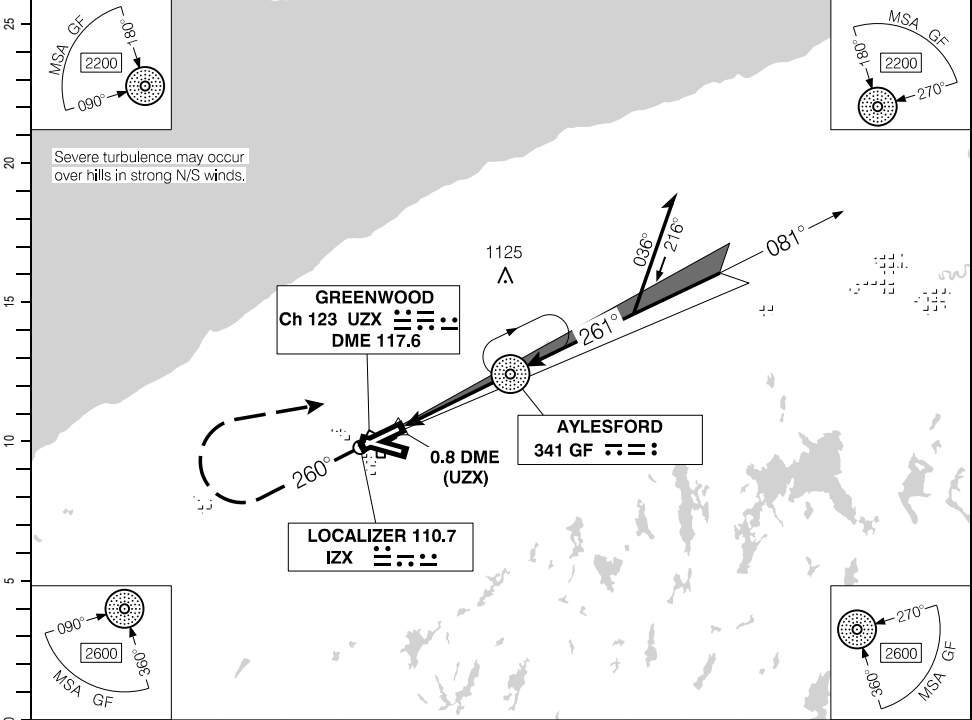

DIST FROM DME (UZX)		1.8	3	4	5	6	7.6	8	9	10	11	12	13
ALT (3.00" APCH PATH)		480	850	1170	1490	1800	2300	2440	2760	3080	3400	3710	4030
MISSED APPROACH Climb to 2600 Hdg 260° then RIGHT turn direct "GF" (NDB) and hold.													
ELEV 92 TDZE 88													
0.8 DME (UZX)													
TCH 50'													
MDA													
GP 1580													
GP 3.00"													
Procedure turn LEFT within 10 NM of "GF" NDB.													

		CATEGORY	A	B	C	D
		ILS ILS/DME	338	(250)	1 RVR 50	
"GF" NDB to RWY 26 4.5 NM		LOC LOC/DME	480	(392)	1 RVR 50	
Knots	ft/min	Min:Sec				
70	370	3:51				
90	480	3:00				
110	580	2:27				
130	690	2:04				
150	800	1:48				

ILS Y RWY 26 (DND)