


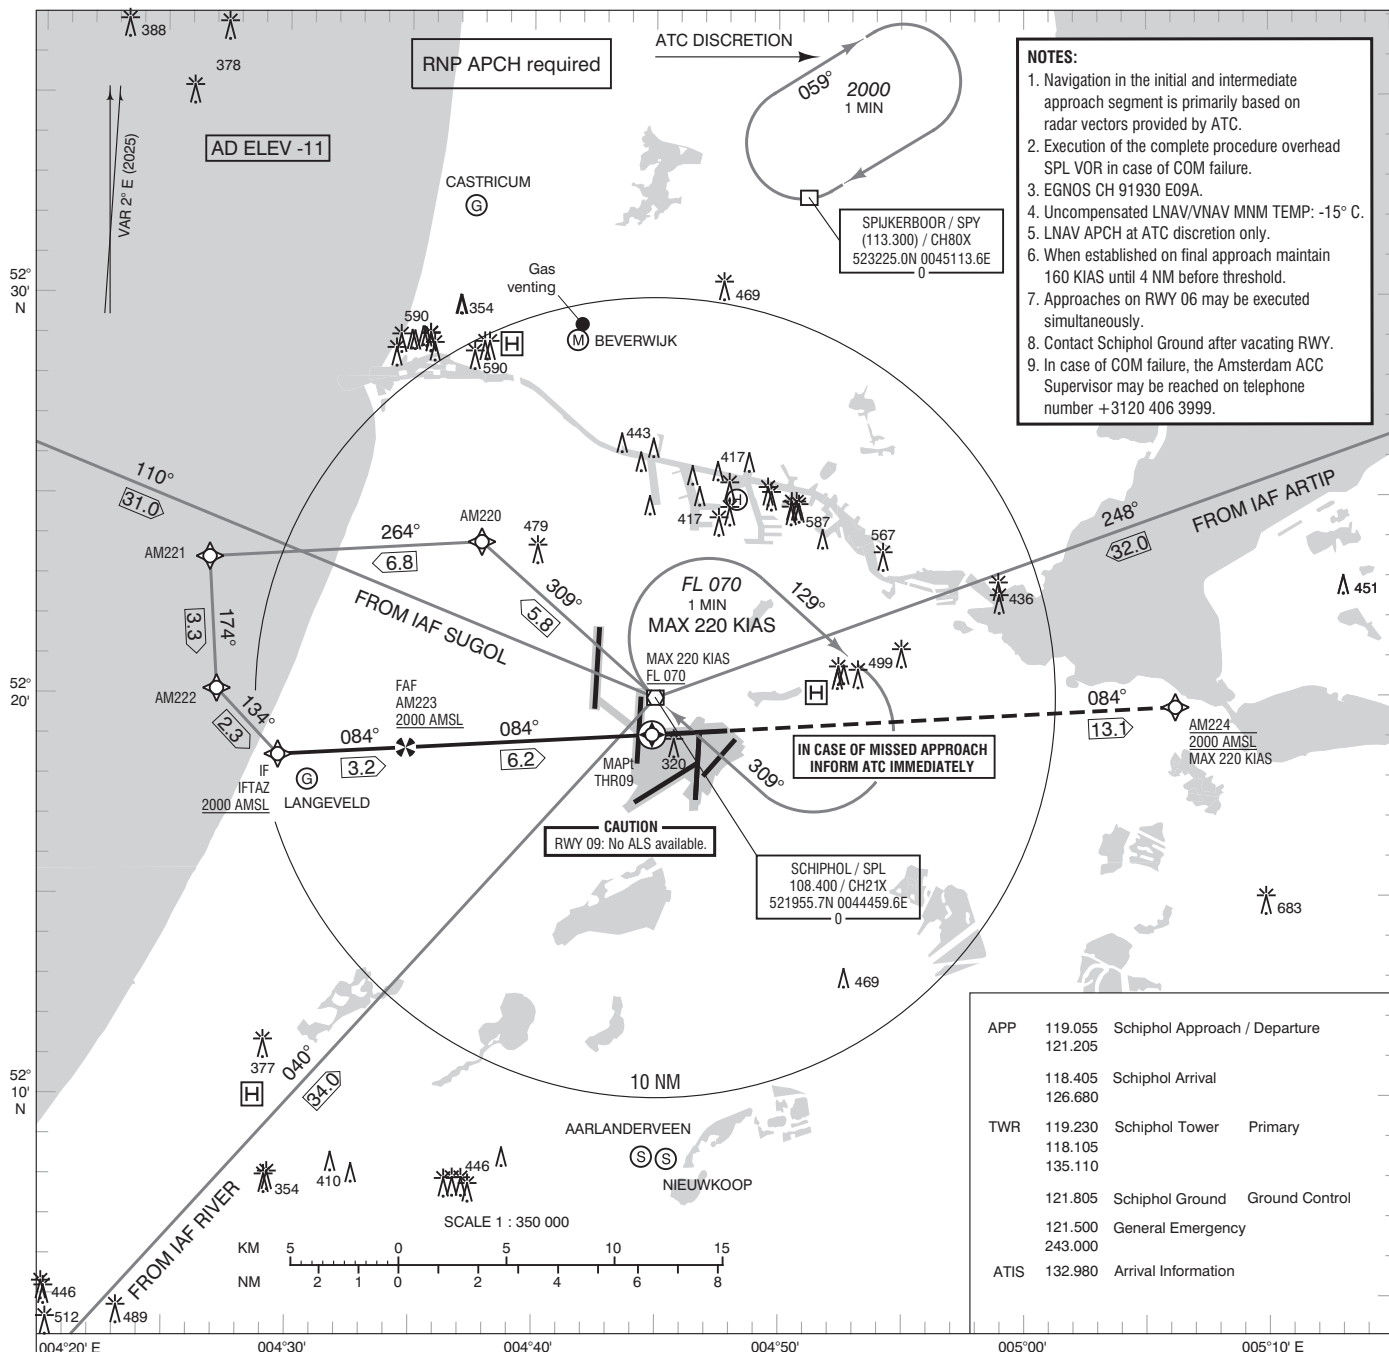

NOTES:

1. Navigation in the initial and intermediate approach segment is primarily based on radar vectors provided by ATC.
2. Execution of the complete procedure overhead SPL VOR in case of COM failure.
3. EGNOS CH 91930 E09A.
4. Uncompensated LNAV/VNAV MNM TEMP: -15° C.
5. LNAV APCH at ATC discretion only.
6. When established on final approach maintain 160 KIAS until 4 NM before threshold.
7. Approaches on RWY 06 may be executed simultaneously.
8. Contact Schiphol Ground after vacating RWY.
9. In case of COM failure, the Amsterdam ACC Supervisor may be reached on telephone number +3120 406 3999.

APP	119.055	Schiphol Approach / Departure
	121.205	
	118.405	Schiphol Arrival
	126.680	
TWR	119.230	Schiphol Tower Primary
	118.105	
	135.110	
	121.805	Schiphol Ground Ground Control
	121.500	General Emergency
	243.000	
ATIS	132.980	Arrival Information

1. Missed approach
- Inform ATC immediately
- Track 084° MAG to AM224 and climb to 2000 FT AMSL.
2. Missed approach in case of communication failure:
- Track 084° MAG and climb to 3000 FT AMSL;
- When passing 2000 FT AMSL start a left turn to AM220 and cross AM220 at 3000 FT AMSL.
- After AM220 descent to 2000 FT AMSL and execute the instrument approach procedure again.

TRANSITION LEVEL BY ATC
TRANSITION ALTITUDE 3000 FT AMSL