




DO NOT DESCEND BELOW THE DESCENT PROFILE

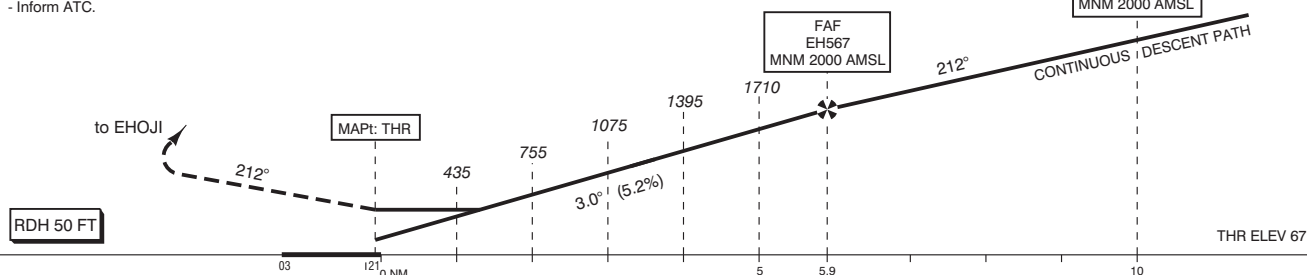

GS IN KT		60		80		100		120		140		160		180		
VERTICAL SPEED		320 FT/MIN		425 FT/MIN		530 FT/MIN		635 FT/MIN		745 FT/MIN		850 FT/MIN		955 FT/MIN		
OCA (OCH) ELEV THR 21: 66.6 FT																
ACFT CAT	LNAV/VNAV MNM TEMP -20°C		LNAV MAPT: THR		CIRCLING		THR 21 512733.8N 0052305.6E EH585 512028.2N 0055133.1E EH558 512428.9N 0051938.6E EH589 513016.1N 0055348.7E EH567 513223.9N 0052831.6E EH591 513611.7N 0055123.1E EH579 513427.3N 0052103.4E EH594 513712.4N 0052041.6E EH582 513719.3N 0051209.3E EH596 513038.4N 0054223.6E						MSA BASED ON ARP			
A	334 (267)		450 (390)		NOT ALLOWED								 1800			
B	344 (277)															
C	354 (287)															
D	364 (297)															
CEILING AND VISIBILITY MINIMA						DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET										
TAKE-OFF	DAY: NA		NIGHT: NA													
LANDING	DAY:		NIGHT:													