



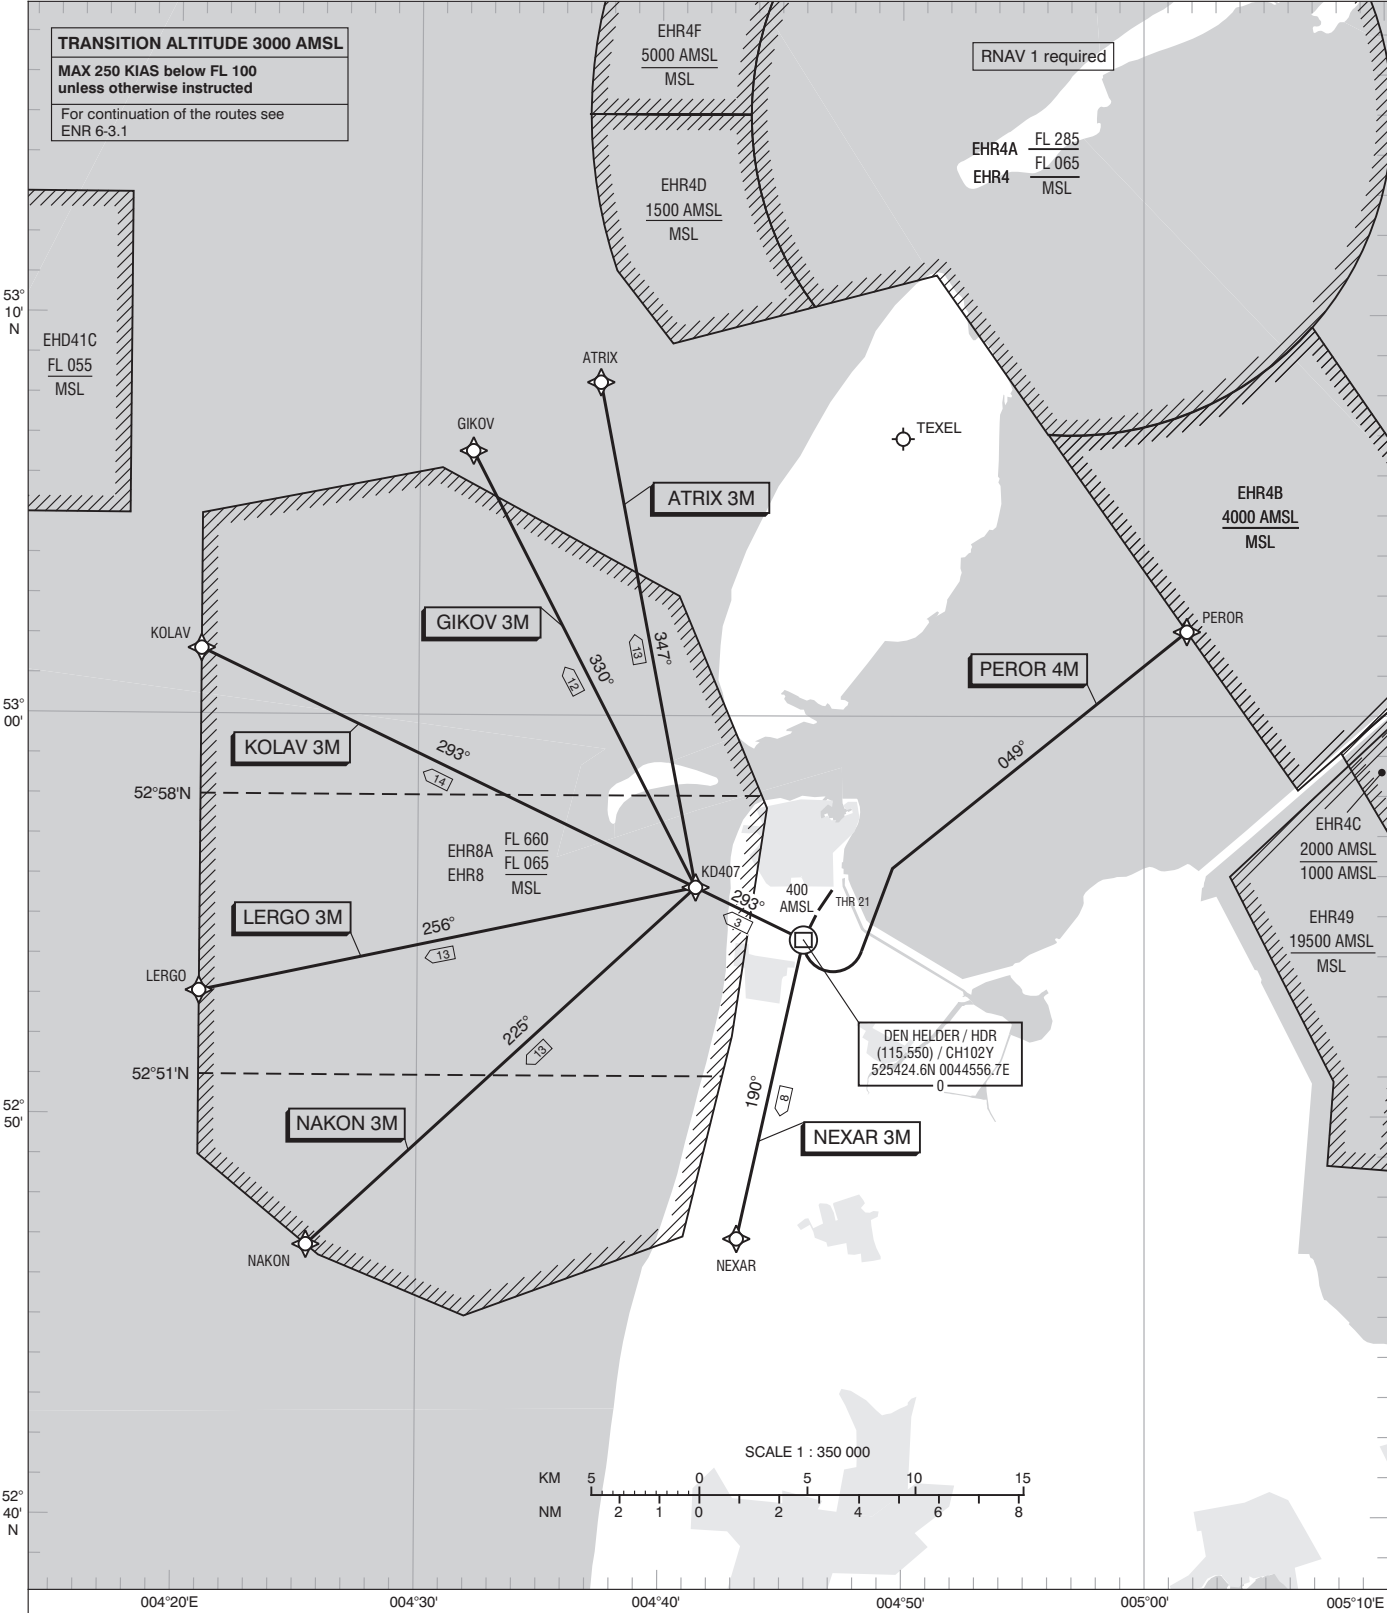

NOTES:

- 1. Noise abatement procedures for off-shore helicopters only.
- 2. For noise abatement maintain rate of climb of 1000 FT/MIN upto 2000 FT, if possible.

MSA BASED ON HDR DME



DISTANCES IN NM
ALTITUDES IN FEET
DIRECTIONS ARE MAGNETIC

AVERAGE VAR 2° E (2025)

— SID
— ATS ROUTE

KD407 525542.8N 0044128.8E

TWR	120.130	De Kooy Tower
APP	124.230	De Kooy Arrival
ATIS	133.010	De Kooy Information