


RNAV (GNSS) RWY 25

584222N 0983044W VAR 3°E

AWOS – 128.62		UNICOM – 122.8 (AU)			ARCAL 122.8(K) (P1)
SAFE ALT 100 NM 2900		WAAS Ch 81150 W25A	APCH CRS 250°	MIN ALT OMPEV 2200	
		ATF			LDA 3202

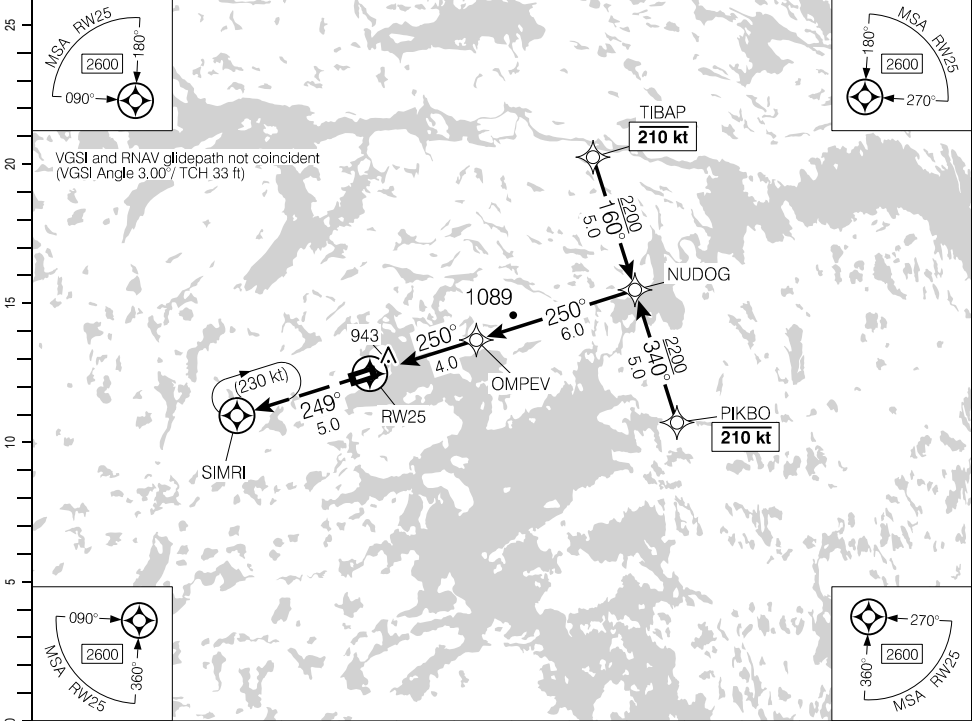

DIST FROM RW25		1.4	2	3	4.0	5	6	7	8	9	10																		
ALT (3.00° APCH PATH)		1380	1560	1880	2200	2510	2830	3150	3470	3790	4110																		
MISSED APPROACH Climb to 2300 track 249° to SIMRI. As required shuttle climb. OMPEV FAWP 2200 NUDOG IAWP/IWP 4110 ELEV 921 TDZE 888 RW25 MAWP TCH 50' MDA 250° 2200 2200 3.00°																													
RASS:  When using CEG8 add 120'.		CATEGORY	A		B		C		D																				
		LPV	1370		(500)		1¼																						
<table><tr><td>Knots</td><td>ft/min</td><td>Min:Sec</td></tr><tr><td>70</td><td>370</td><td></td></tr><tr><td>90</td><td>480</td><td></td></tr><tr><td>110</td><td>580</td><td></td></tr><tr><td>130</td><td>690</td><td></td></tr><tr><td>150</td><td>800</td><td></td></tr></table>		Knots	ft/min	Min:Sec	70	370		90	480		110	580		130	690		150	800		LNAV	1380		(510)		1½				
		Knots	ft/min	Min:Sec																									
		70	370																										
		90	480																										
		110	580																										
130	690																												
150	800																												

RNAV (GNSS) RWY 25

CYBQ

EFF 12 JUN 25

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved