


RNAV (GNSS) RWY 17

● ATIS – 127.9 ● AWOS – 127.9	ARR – 125.9		● TWR – 118.2 120.7 ● TFC – 118.2	● GND – 121.8	ARCAL 118.2(K) P1 A2
SAFE ALT 100 NM 13,800	WAAS Ch 80588 W17A	APCH CRS 165°	MIN ALT KEMKO 6000	LDA 5000	

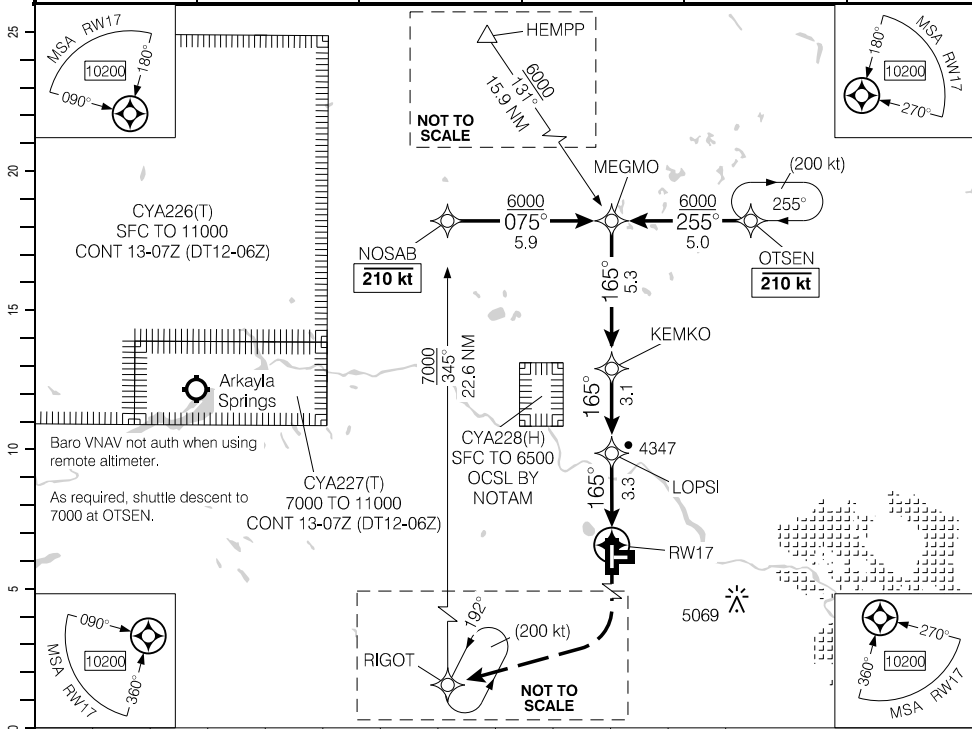

11.7	11	10	9	8	7	6.4	5	4	3	2	1.1	DIST FROM RW17
7690	7480	7160	6850	6530	6210	6000	5570	5250	4940	4620	4340	ALT (3.00° APCH PATH)

MEGMO
IWP
7690

6000

3.00°

6000

5000 (LNAV only)

LOPSI
SDWP
5030

MDA

RW17
MAWP

TCH 50'

ELEV 3940
TDZE 3933

✱

165°

MISSED APPROACH
Climb to 4400 hdg 165°. Then climbing RIGHT turn to 7000 direct to RIGOT. As required shuttle climb. Shuttle to 8800 BPOC.

5.3

3.1

3.3

RASS: When using CYC add 80'.			CATEGORY	A	B	C	D
			LPV	4180	(250)		1
Knots	ft/min	Min:Sec	LNAV/VNAV (min. -26°C, max. 51°C)	4216	(286)		1
70	370		LNAV	4340	(410)		1¼
90	480						
110	580						
130	690						
150	800						

RNAV (GNSS) RWY 17