

RESTRICTED CANADA AIR PILOT

This aeronautical information/data is published for OPS SPEC use only

CYDL-IAP-3K

DEASE LAKE, BC

CYDL

RNAV (GNSS) X RWY 21

582520N 1300153W VAR 19°E

MET – 128.7		TFC – 123.2		ATF	ARCAL 123.2(K)*
SAFE ALT 100 NM 12,300	WAAS Ch 81073 W21B	APCH CRS 210°	MIN ALT TOXUL 7000	LDA 5601	$\odot_2$ AS* 4.0° 3.0°


RESTRICTED

VGSI not coincident with the RNAV glidepath.

Terrain rises abruptly to 4400' 1 NM west of airport.

Powerlines to 2678' aprx 1500' NE of RWY 21 threshold.

If unable to meet climb gradient, see RNAV (GNSS) Z RWY 21.

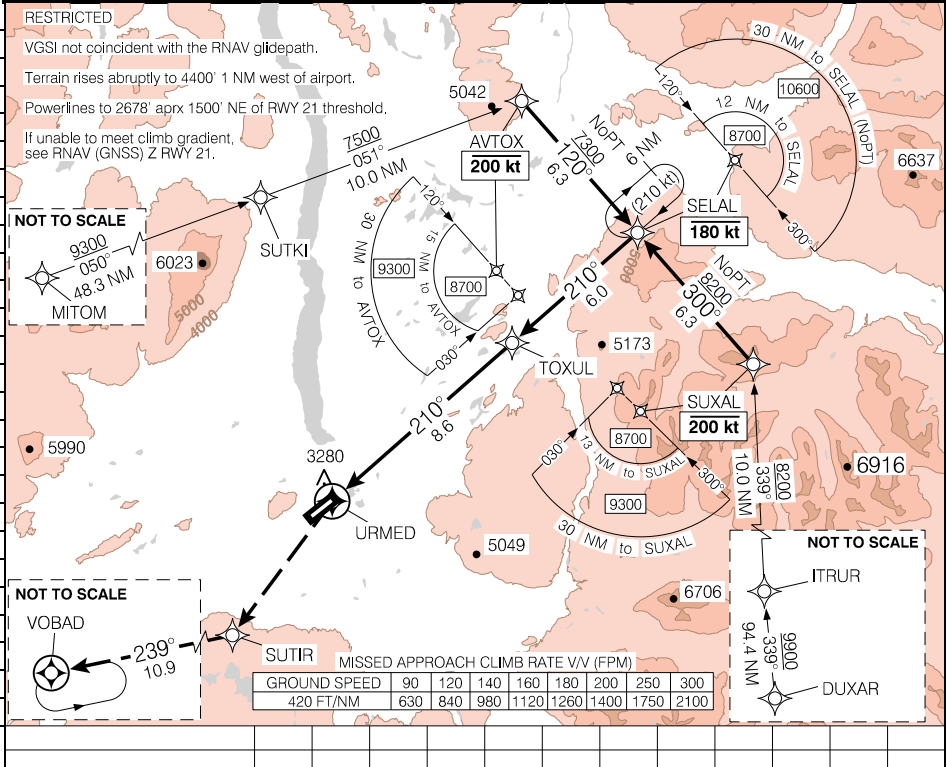


MISSED APPROACH

Requires a minimum climb gradient of **420** ft/NM to **5500**.

Climbing **LEFT** turn direct to SUTIR, then continue climb track **239°** to VOBAD to **8300**. As required shuttle climb.

ELEV 2634
TDZE 2634

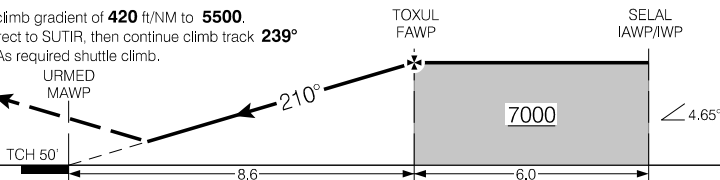

	CATEGORY	A	B	C	D
	LPV	3188 (562) 1%	NOT AUTHORIZED		
Knots	ft/min	Min:Sec			
70					
90					
110					
130					
150					

RNAV (GNSS) X RWY 21

CYDL

EFF 31 OCT 24

REGULATORY REVIEW 6 JUL 2028

CYDL-IAP-3K

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved

RESTRICTED

RESTRICTED