


		● UNICOM – 122.8 (AU)			ARCAL 122.8(K)
SAFE ALT 100 NM 2500	RNAV	APCH CRS 141°	MIN ALT ITGOK 1400	LDA 3810	(AP)

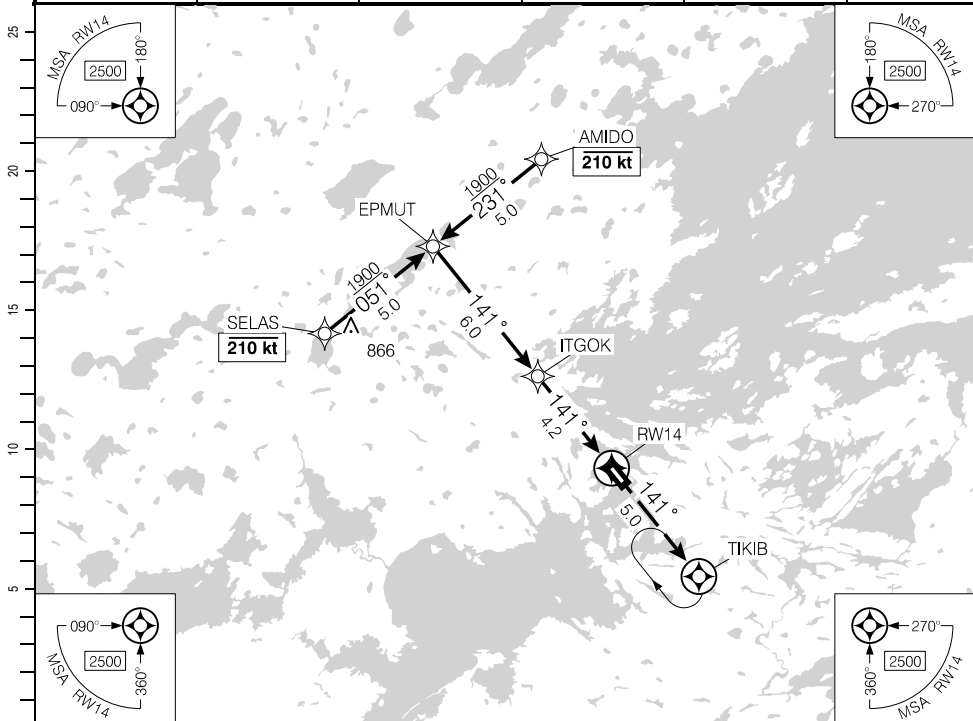

		10.2	9	8	7	6	5	4.2	3	2	1.5	DIST FROM RW14	
		3910	3520	3200	2880	2560	2240	2000	1610	1290	1120	ALT (3.00° APCH PATH)	
EPMUT IAWP/IWP 3910 2000 1400 6.0 ITGOK FAWP 2000 (3.00°) 141° 4.2 MDA RW14 MAWP ELEV 617 TDZE 604 MISSED APPROACH Climb to 2500 track 141° TIKIB. As required shuttle climb													
RASS: When using CYIV add 120°.		CATEGORY		A		B		C		D			
		LNAB		1120 (519) 1½									
		Knots		ft/min		Min:Sec							
		70		370									
90		480											
110		580											
130		690											
150		800											