


RNAV (GNSS) RWY 27

514128N 0760808W VAR 16°W

AUTO – 122.97		UNICOM – 131.7 (AU)			A2 • (P2)
SAFE ALT 100 NM 3400	WAAS Ch 80608 W27A	APCH CRS 270°	MIN ALT OTSEP 2300	LDA 5000	

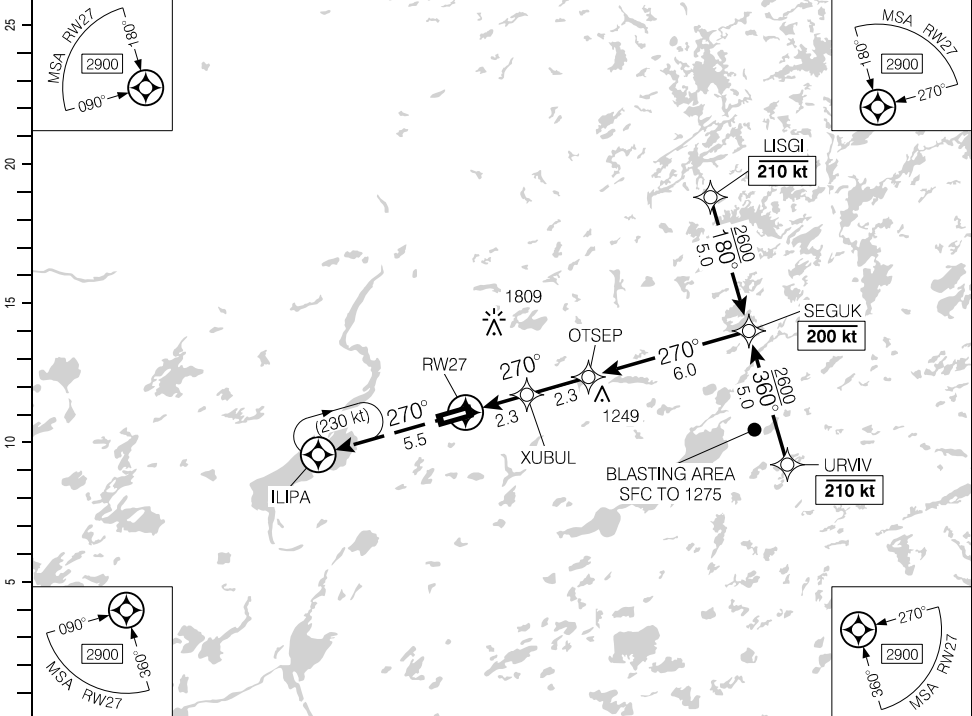

DIST FROM RW27		1.3	2	3	4	5.5	6	7	8	9	10	10.6	
ALT (3.00° APCH PATH)		1260	1470	1790	2110	2600	2750	3070	3380	3700	4020	4210	
MISSED APPROACH Climb to 2900 track 270° to ILIPA. As required, shuttle climb. ELEV 802 TDZE 787 TCH 50' RW27 MAWP XUBUL SDWP 1570 OTSEP FAWP 2300 SEGUK IAWP/IWP 4210 MDA 1400 (LNAV only) 2300 2600 3.00°													
RASS: When using CEL8 add 150'.		CATEGORY	A		B		C		D				
		LPV	1034		(250)		1						
		LNAV	1260		(476)		1½						
Knots	ft/min	Min:Sec											
70	370												
90	480												
110	580												
130	690												
150	800												

RNAV (GNSS) RWY 27

CYHH

EFF 5 SEP 24

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved